


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

1981 VOLVO 343 OEM Service and Repair Workshop Manual


Go to manual page

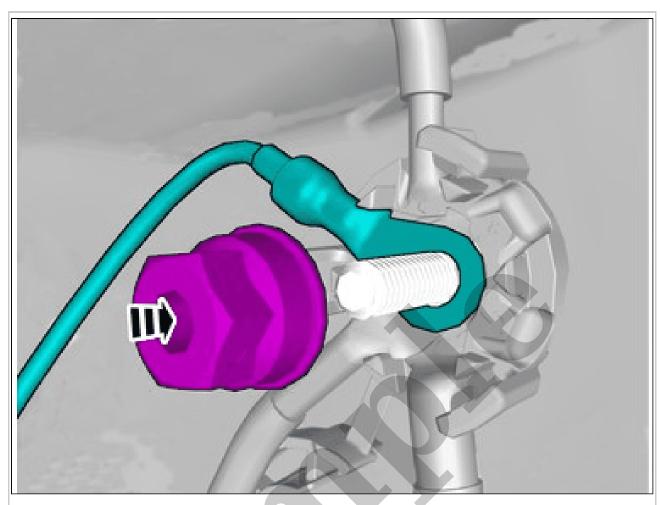


Courtesy of VOLVO CARS CORPORATION

Connect the prerouted cable. Install the nut.

Torque: M6, 10Nm

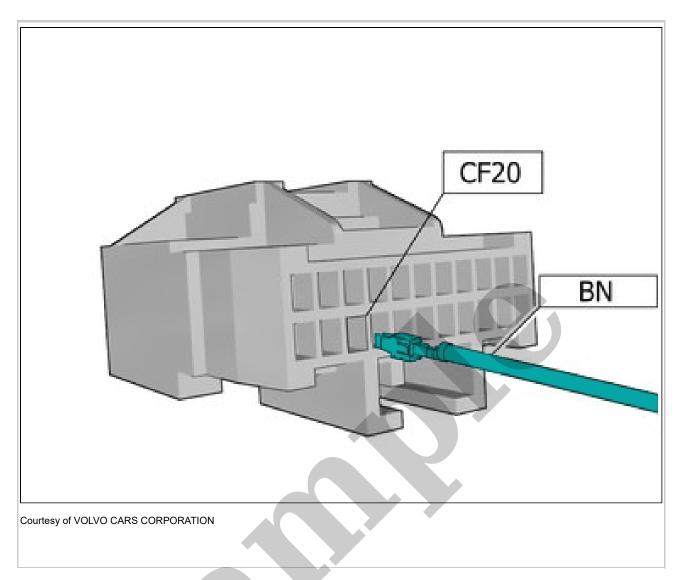


Connect the prerouted cable.

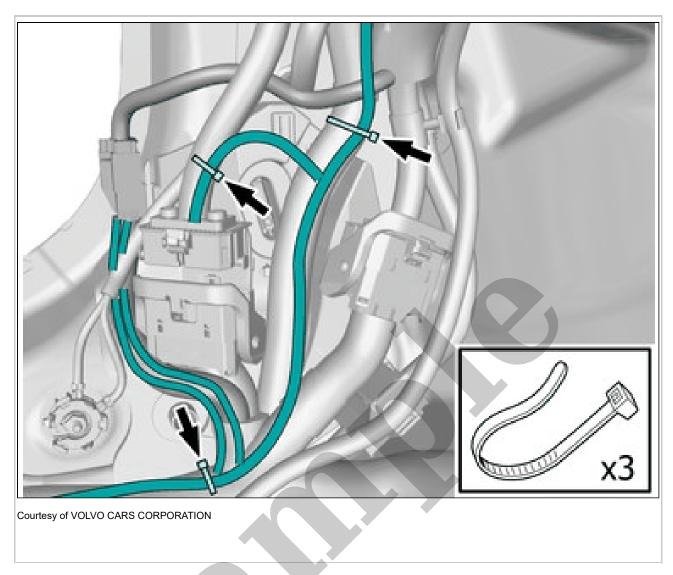

Route the wire adjacent to existing wirings. Install the cable.

Use a cable tie

VEHICLES EARLY VERSION

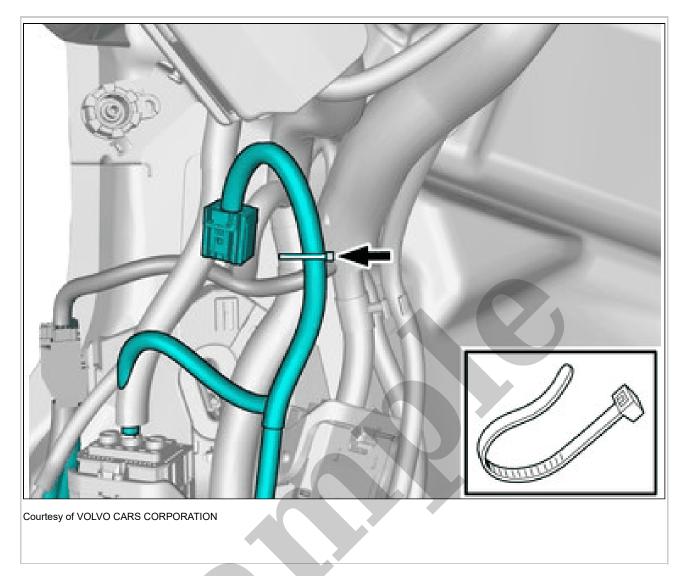


Install the cable.


Use a cable tie

Reinstall the removed parts in reverse order.

Download the appropriate software (application) for the accessory's function according to the service information in VIDA. See VIDA or the accessories catalogue for software part number.

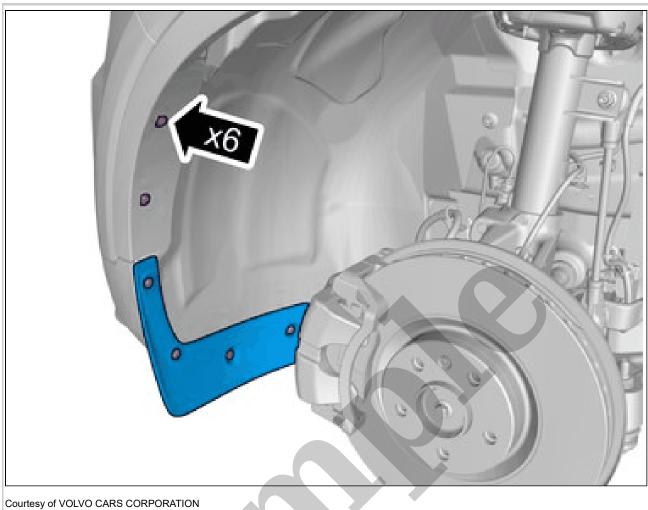

Remove the screws. Remove the marked part.

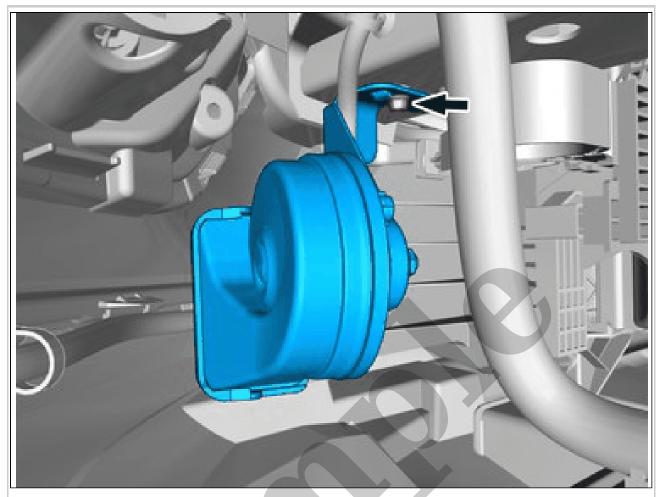

Courtesy of VOLVO CARS CORPORATION


Remove the screw.

Remove the marked part.

Torque: M6, 10Nm

APPLIES TO THE RIGHT-HAND SIDE

Remove casing bumper front. Refer to: COVER BUMPER FRONT

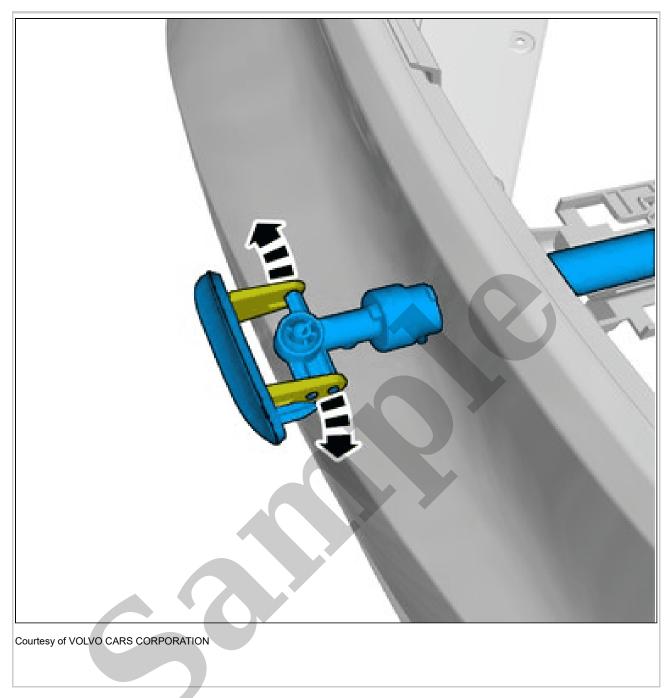


Remove the marked part.


HEADLIGHT WASHERS > HEADLIGHT WASHERS [2018-2022] > INSTALLATION

To install, reverse the removal procedure.

NOZZLE REAR WINDOW WASHER > NOZZLE REAR WINDOW WASHER [2018-2022] > REMOVAL

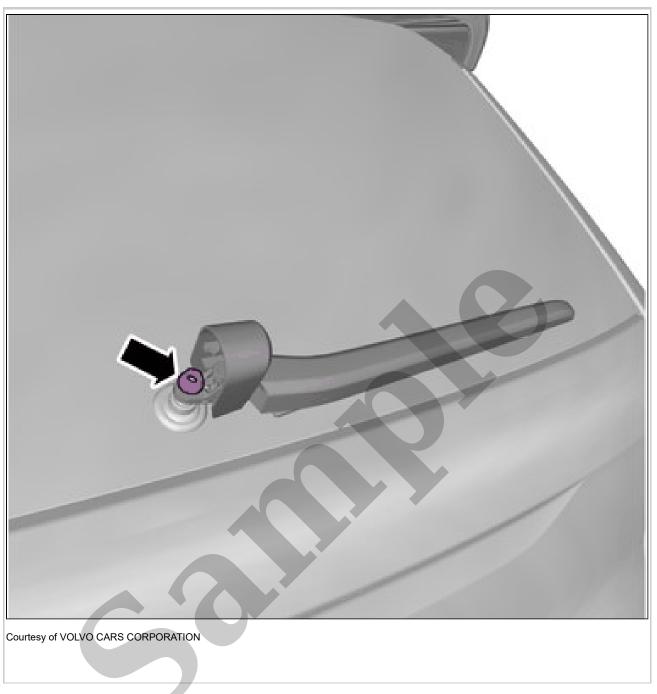

Torque: Rear window wiper arm, 11Nm

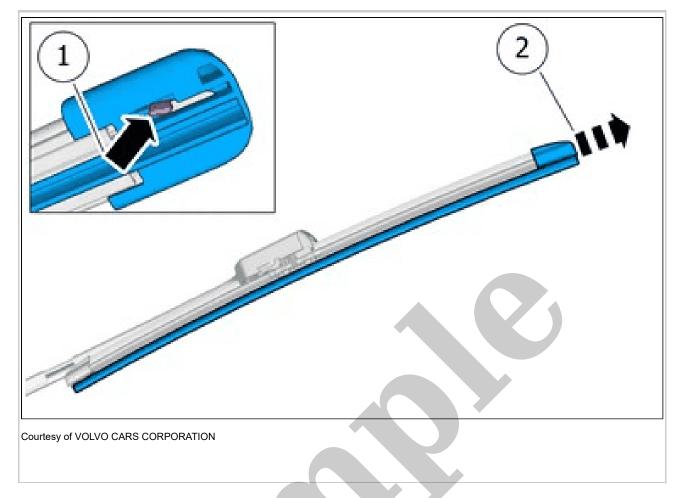

- 1. Release the lock.
- 2. Remove the marked part.

REFILL RUBBER, WIPER BLADE > REFILL RUBBER, WIPER BLADE [2018-2022] > INSTALLATION

To install, reverse the removal procedure.

WASHER FLUID RESERVOIR > WASHER FLUID RESERVOIR [2018-2022] > REMOVAL AND INSTALLATION

REMOVAL

NOTE: Removal steps in this procedure may contain installation details.

Remove casing bumper front. Refer to: COVER BUMPER FRONT