


Your Ultimate Source for OEM Repair Manuals


FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

1988 VOLVO 440 OEM Service and Repair Workshop Manual

Go to manual page

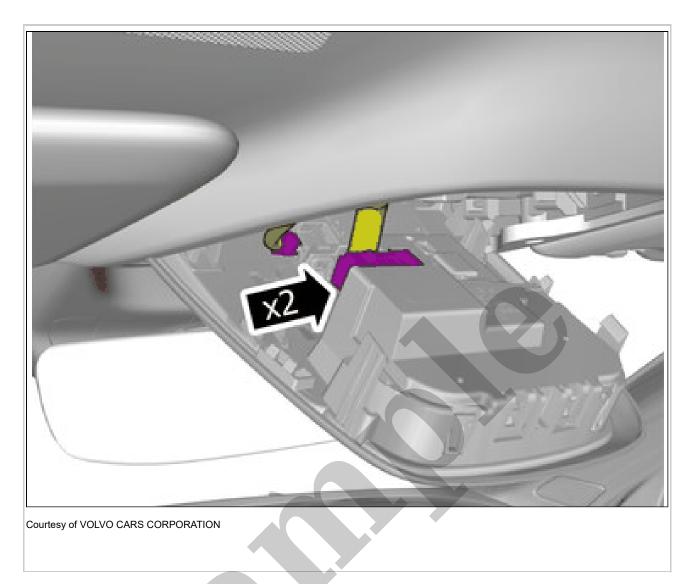


Disconnect the connectors.

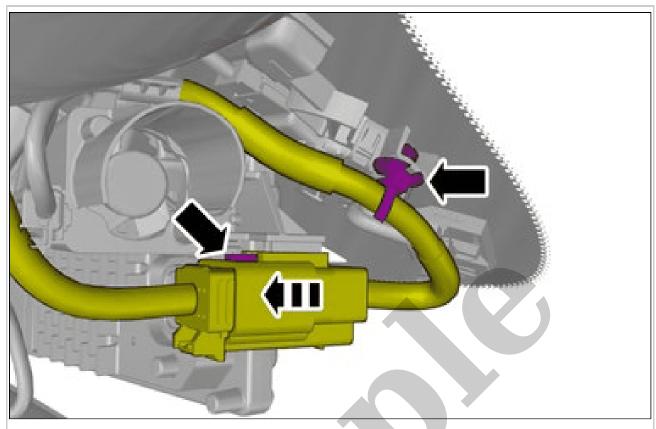

Courtesy of VOLVO CARS CORPORATION


Remove the cable harness clips.

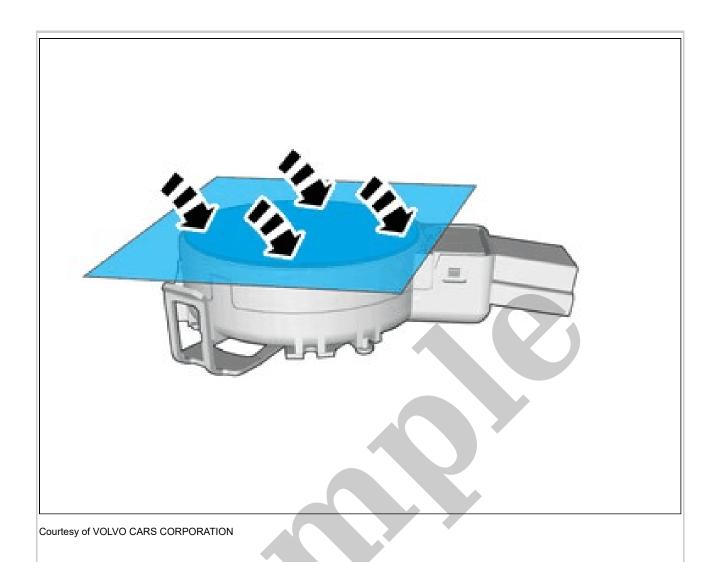

NOTE: This step is not necessary when installing a new component.

NOTE: Make sure that the component is clean and free of foreign material.

Install the marked component.

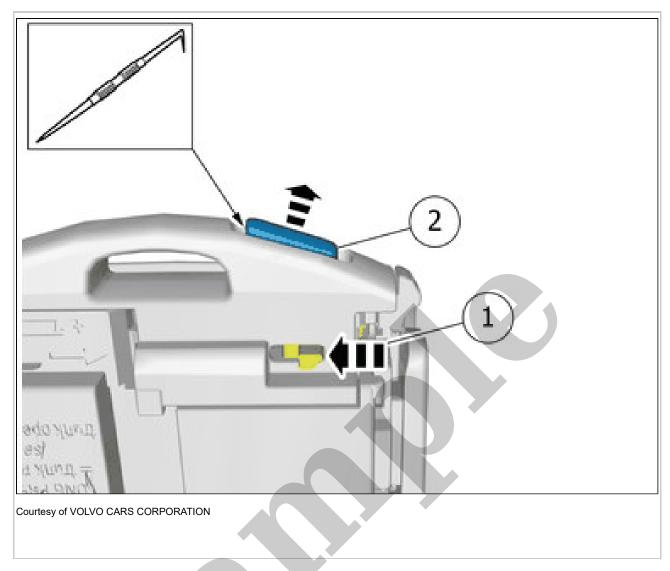


Release the lock.

Hold it down.

Remove the marked part.

REMOTE KEY SLIDER > REMOTE KEY SLIDER [2018-2022] > INSTALLATION THE FOLLOWING STEPS APPLY IF SLIDER IS MISSING

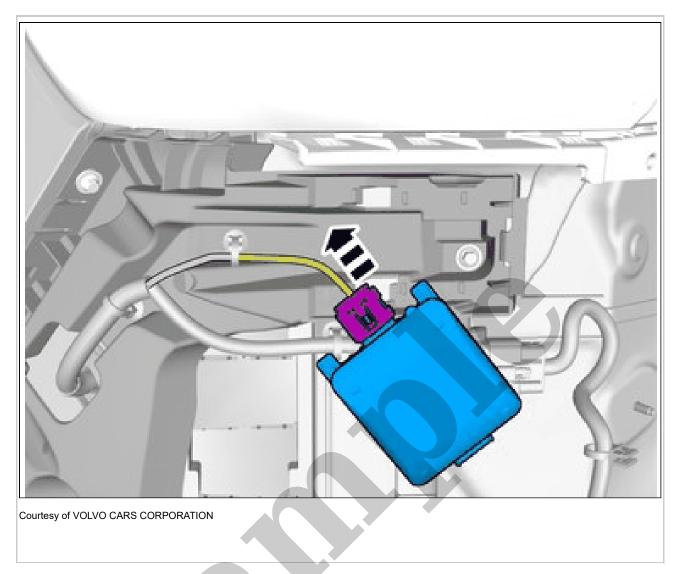

Disconnect the connector. Loosen the marked detail.

SIDE OBSTACLE DETECTION CONTROL MODULE LEFT > SIDE OBSTACLE DETECTION CONTROL MODULE LEFT (SODL) [2018-2022] > INSTALLATION


To install, reverse the removal procedure.

NOTE: The following steps are only necessary when installing a new component.

Order and download the appropriate software according to: VIDA/Software/Hardware Changes


SIDE OBSTACLE DETECTION CONTROL MODULE RIGHT > SIDE OBSTACLE DETECTION CONTROL MODULE RIGHT (SODR) [2018-2022] > REMOVAL

Set the vehicle to Inactive mode, described in user mode. Refer to: USAGE MODE

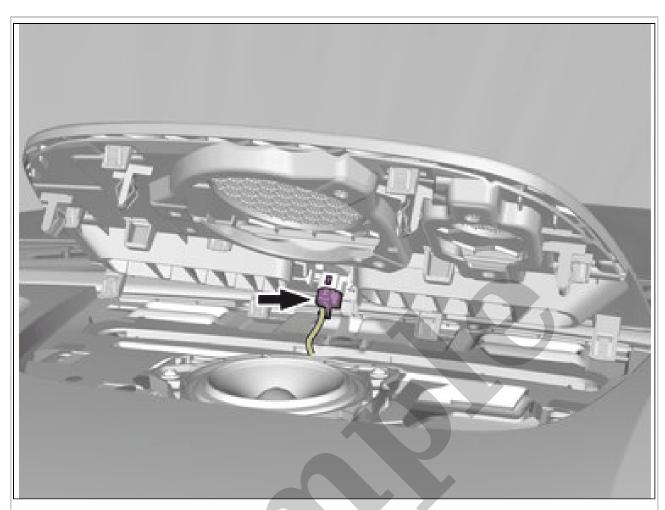


Courtesy of VOLVO CARS CORPORATION

Disconnect the connector.

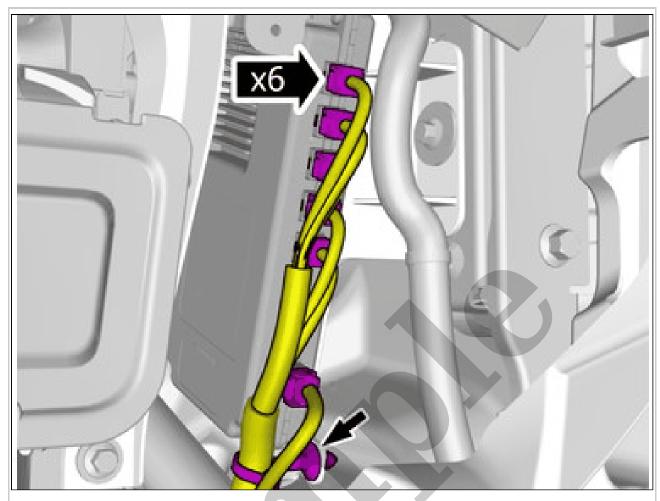


Courtesy of VOLVO CARS CORPORATION

Loosen the clip.
Disconnect the connectors.
Fold the cable harness aside.

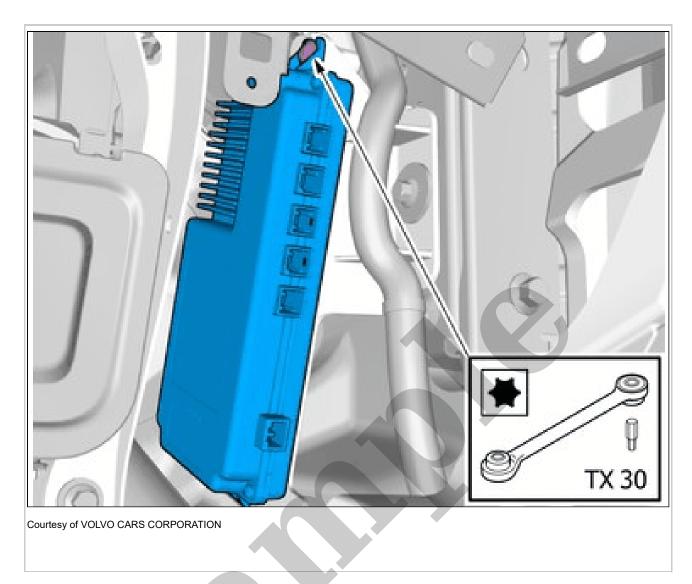

Remove the screw.
Remove the marked part.
VEHICLES LATE VERSION

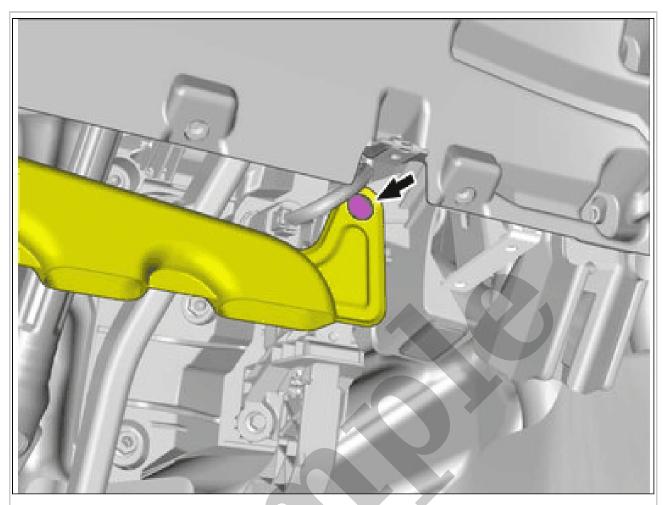

Courtesy of VOLVO CARS CORPORATION

Remove the screw. Fold marked part aside.