


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

1991 VOLVO 440 OEM Service and Repair Workshop Manual

Go to manual page

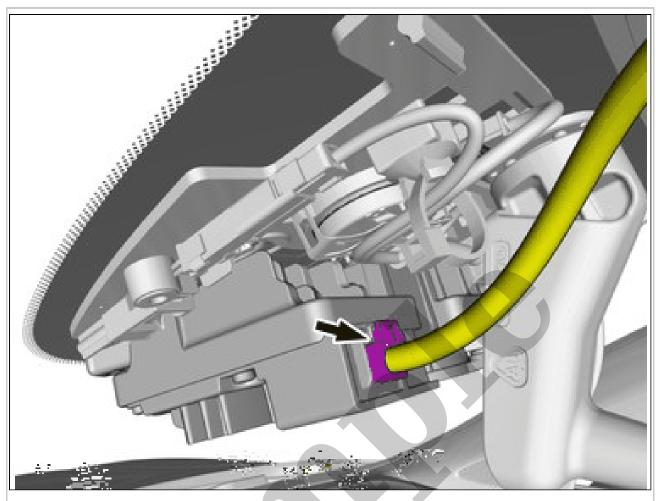

Courtesy of VOLVO CARS CORPORATION


Disconnect the connector.

Calibrate FLC2 according to: Diagnostics / Components / Control modules / Forward looking camera (FLC2) / Diagnostic sequences /Calibration of forward looking camera (FLC2)


FORWARD LOOKING RADAR > FORWARD LOOKING RADAR (FLR) [2021-2022, E400V6] > REMOVAL

Perform battery disconnecting and connecting. Refer to: BATTERY DISCONNECTING AND CONNECTING


Remove casing bumper front. Refer to: COVER BUMPER FRONT

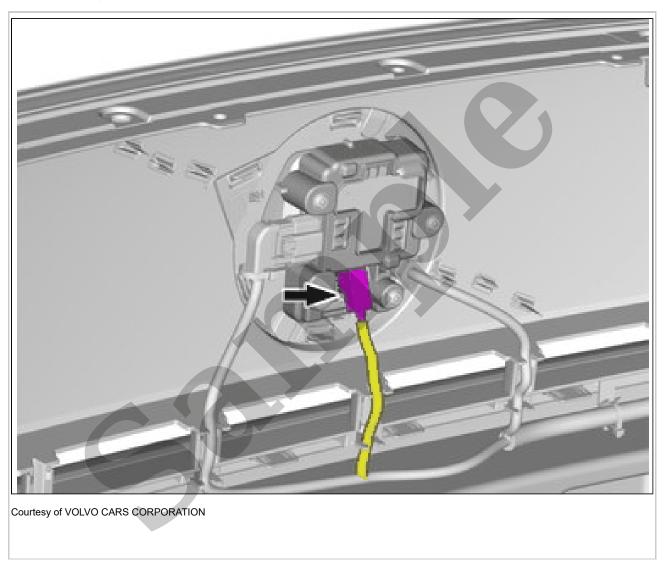


Release the connector's catch. Disconnect the connector.

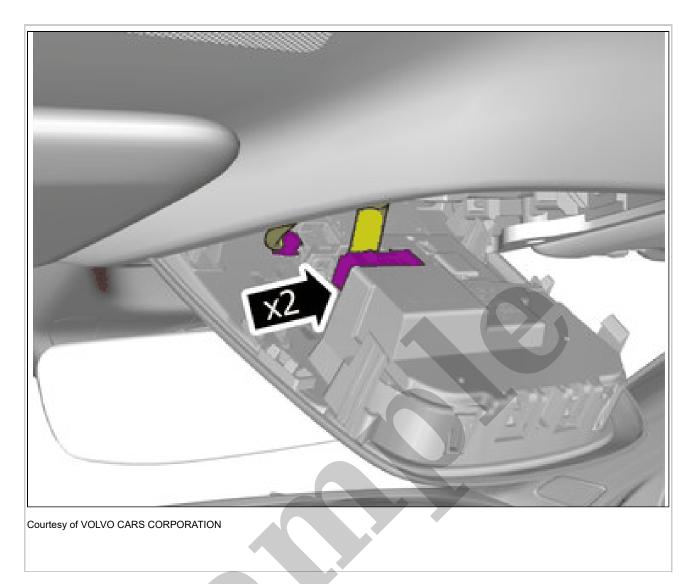

Disconnect the connectors.

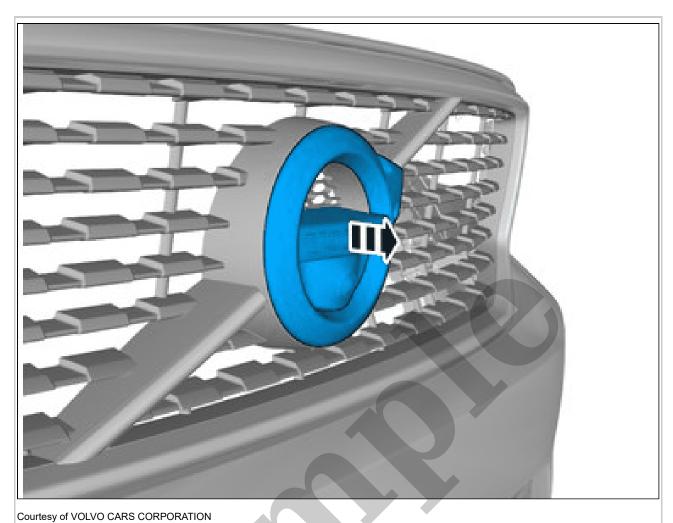

Remove the marked part.

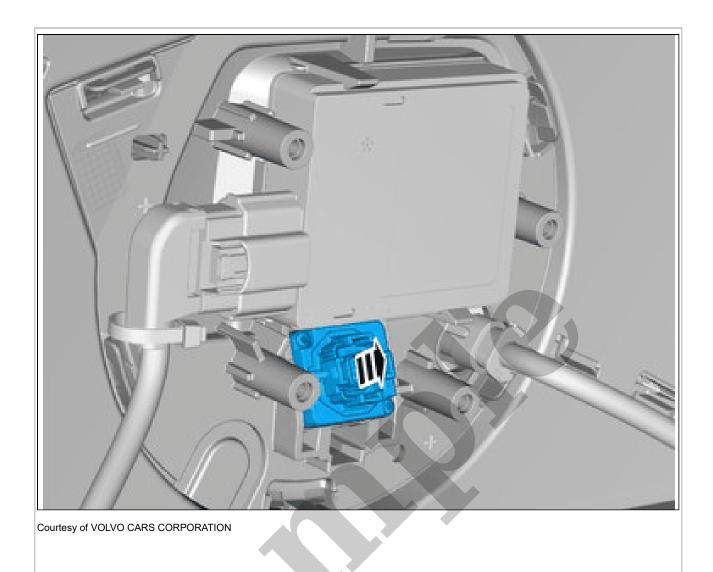

Remove the marked part.


PARKING ASSISTANCE CAMERA, FRONT > PARKING ASSISTANCE CAMERA, FRONT [2021-2022, E400V6] > INSTALLATION

To install, reverse the removal procedure.


Calibrate WAM according to: Diagnostics / Components / Control modules /Wide Angle Vision Module (WAM) / Diagnostic sequences / Calibrating parking assistance cameras

PARKING ASSISTANCE CAMERA, REAR > PARKING ASSISTANCE CAMERA, REAR [2018-2022] > REMOVAL


Set the vehicle to Inactive mode, described in user mode. Refer to: USAGE MODE

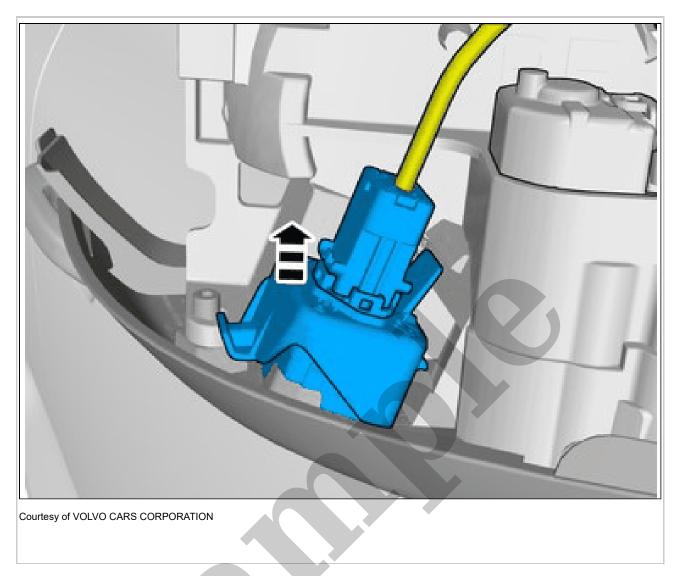


Remove the marked part.

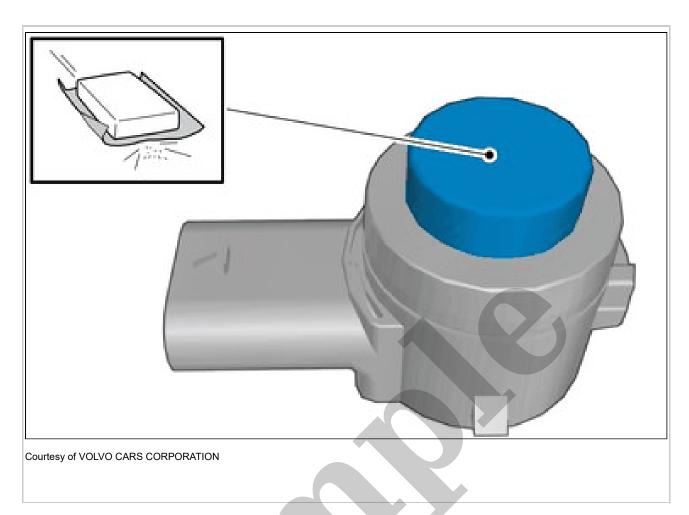

Matt the surface gently. **Use:** Sand paper P1000,

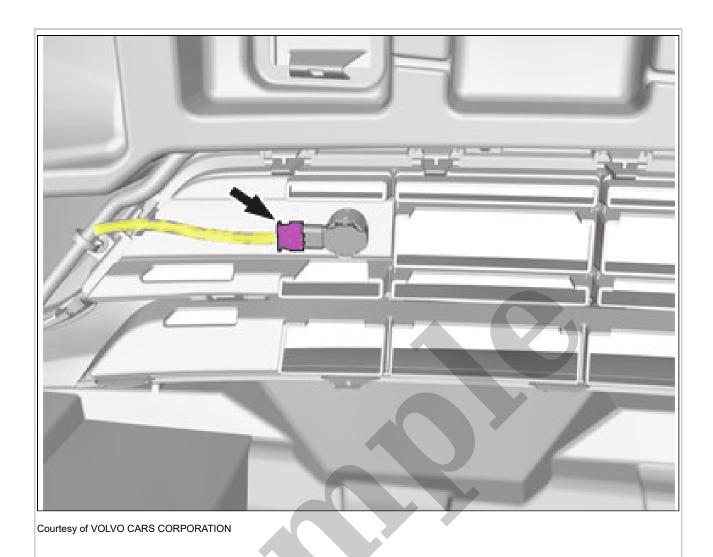

Disconnect the connector.

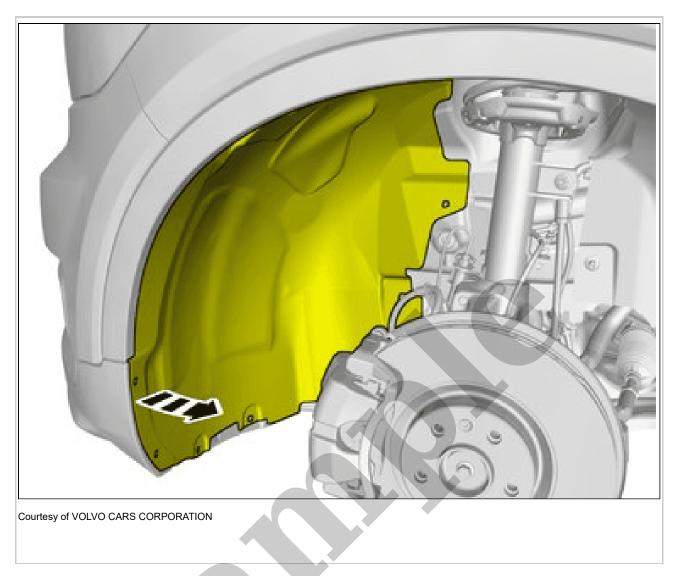

Fold the wing liner aside.