


# Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

## 1992 JEEP Cherokee OEM Service and Repair Workshop Manual

[Go to manual page](#)

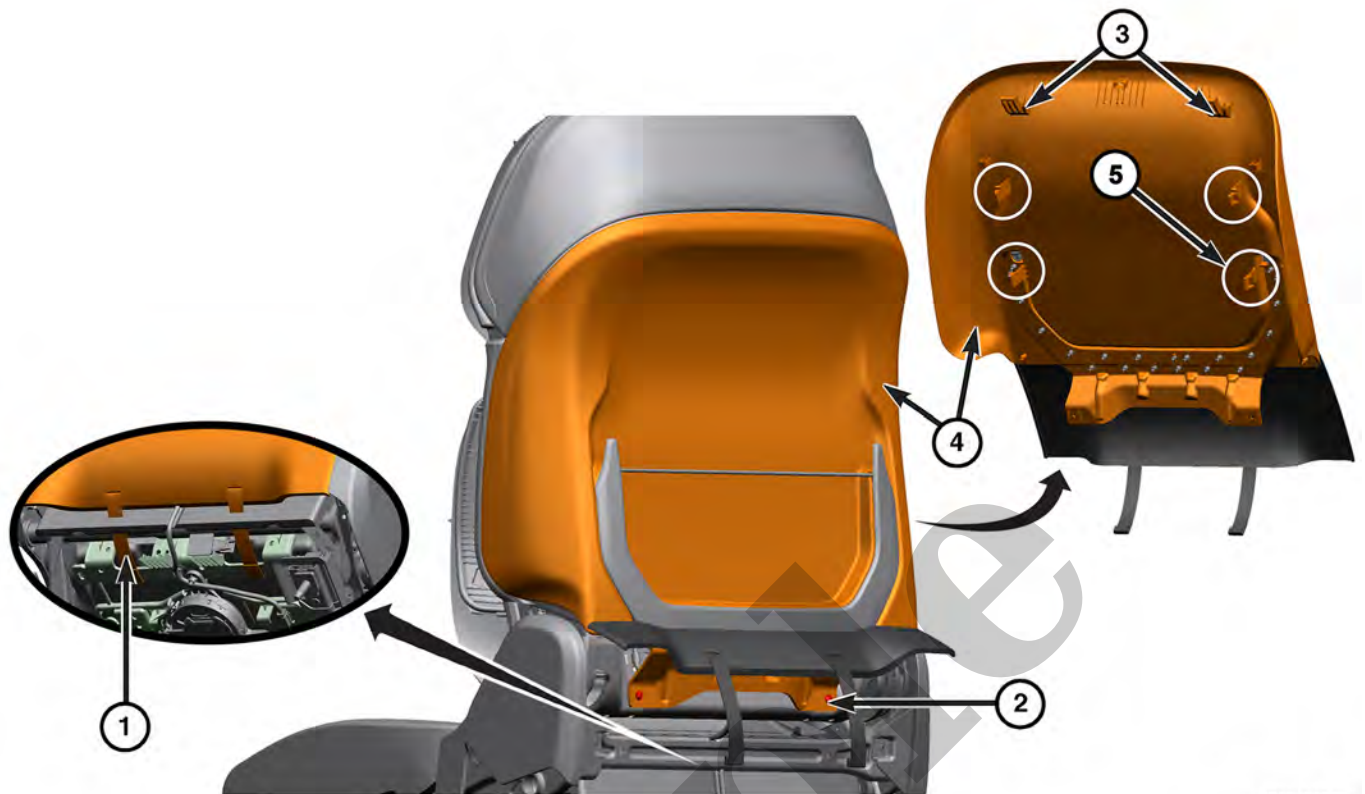

2319191263

1 - J-Straps


2 - Lower Hidden Fasteners

3 - J-Hooks

4 - Lower Seat Back Panel

5 - Retaining Tabs

3. Unhook the J-Straps from the flap at the bottom of the cover going to the seat frame and lift lower fabric to access lower hidden fasteners.
4. Remove the back panel lower hidden fasteners.
5. Pull the seat back panel out to release the retaining tabs, then down to release hidden J-Hooks to remove lower seat back panel.

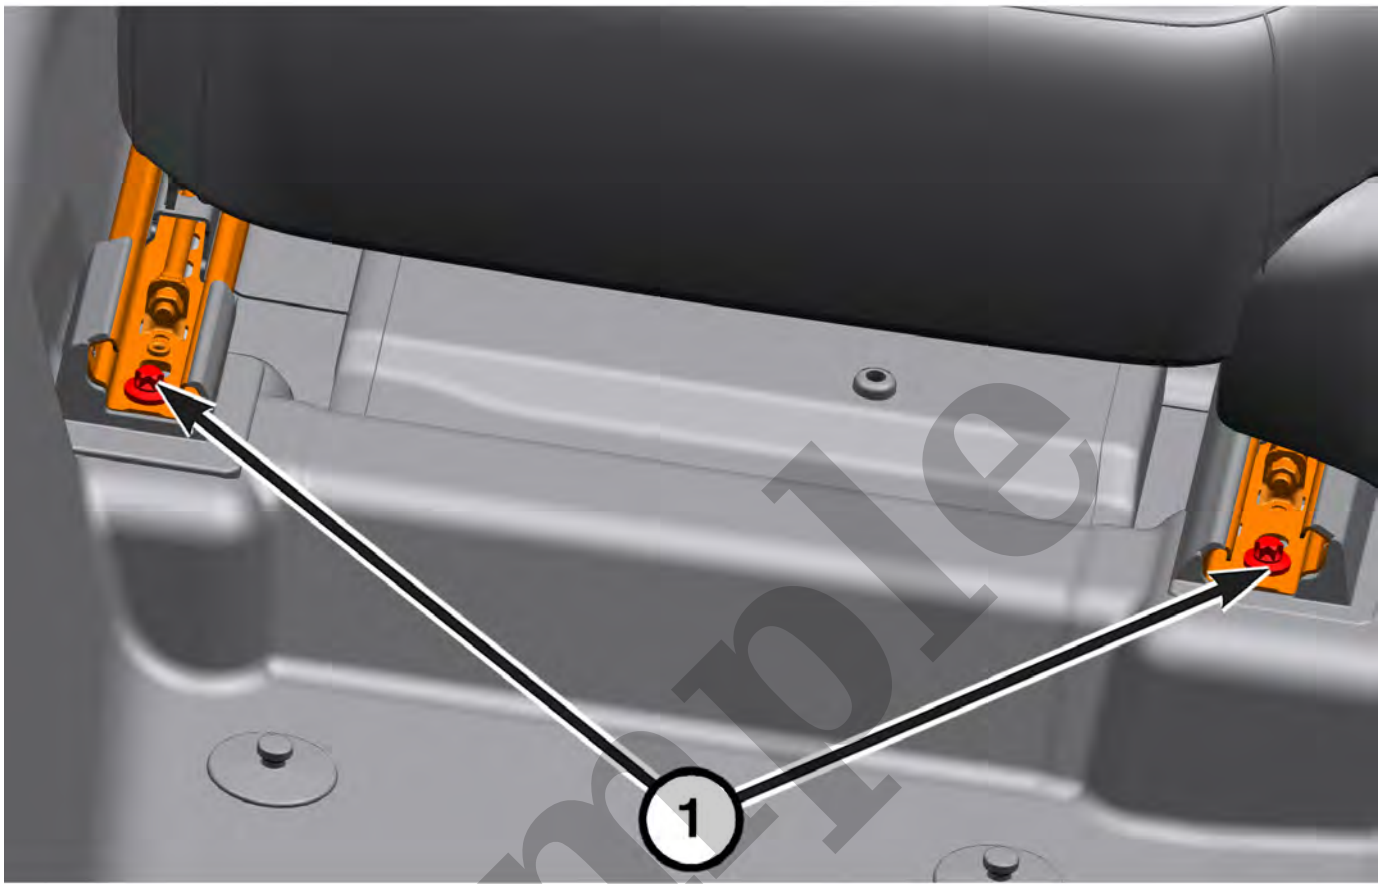

2319165477

1 - Front Seat Track to Floor Front Bolts

5. Remove the front seat track to floor front bolts.
6. Disconnect the wire harness connectors.
7. Remove the seat from the vehicle.

#### **INSTALLATION**

Follow the removal procedure in reverse for general reassembly of the components on the vehicle.

#### **TORQUE SPECIFICATIONS - SEATS - LONG WHEELBASE MODELS**



2319180615

|                            |
|----------------------------|
| 1 - J-Straps               |
| 2 - Lower Hidden Fasteners |
| 3 - J-Hooks                |

2. Release the J-Straps and lift the flap.

**OUTBOARD**

- [23 - Body / Seats, Front / SEAT, Front / Removal and Installation](#)
- [23 - Body / Seats, Second Row / SEAT, Second Row / Removal and Installation](#)
- [23 - Body / Seats, Third Row / SEAT, Third Row / Removal and Installation](#)

Sample

## INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle.

### Refer To List:

#### List 1

- [23 - Body / Seats, Front / Warning](#)
- [23 - Body / Seats, Second Row / Warning](#)
- [23 - Body / Seats, Third Row / Warning](#)

#### List 2

- [23 - Body / Seats, Front / HEADREST, Front / Removal and Installation](#)
- [23 - Body / Seats, Second Row / HEADREST, Second Row / Removal and Installation](#)
- [23 - Body / Seats, Third Row / HEADREST, Third Row / Removal and Installation](#)




1 -Outer J-Strips

2 - Inner J-Strip

3 - Front Seat

2. Disengage the inner J-Strip from the right seat wire. Disengage the right outer J-Strips from the seat frame.

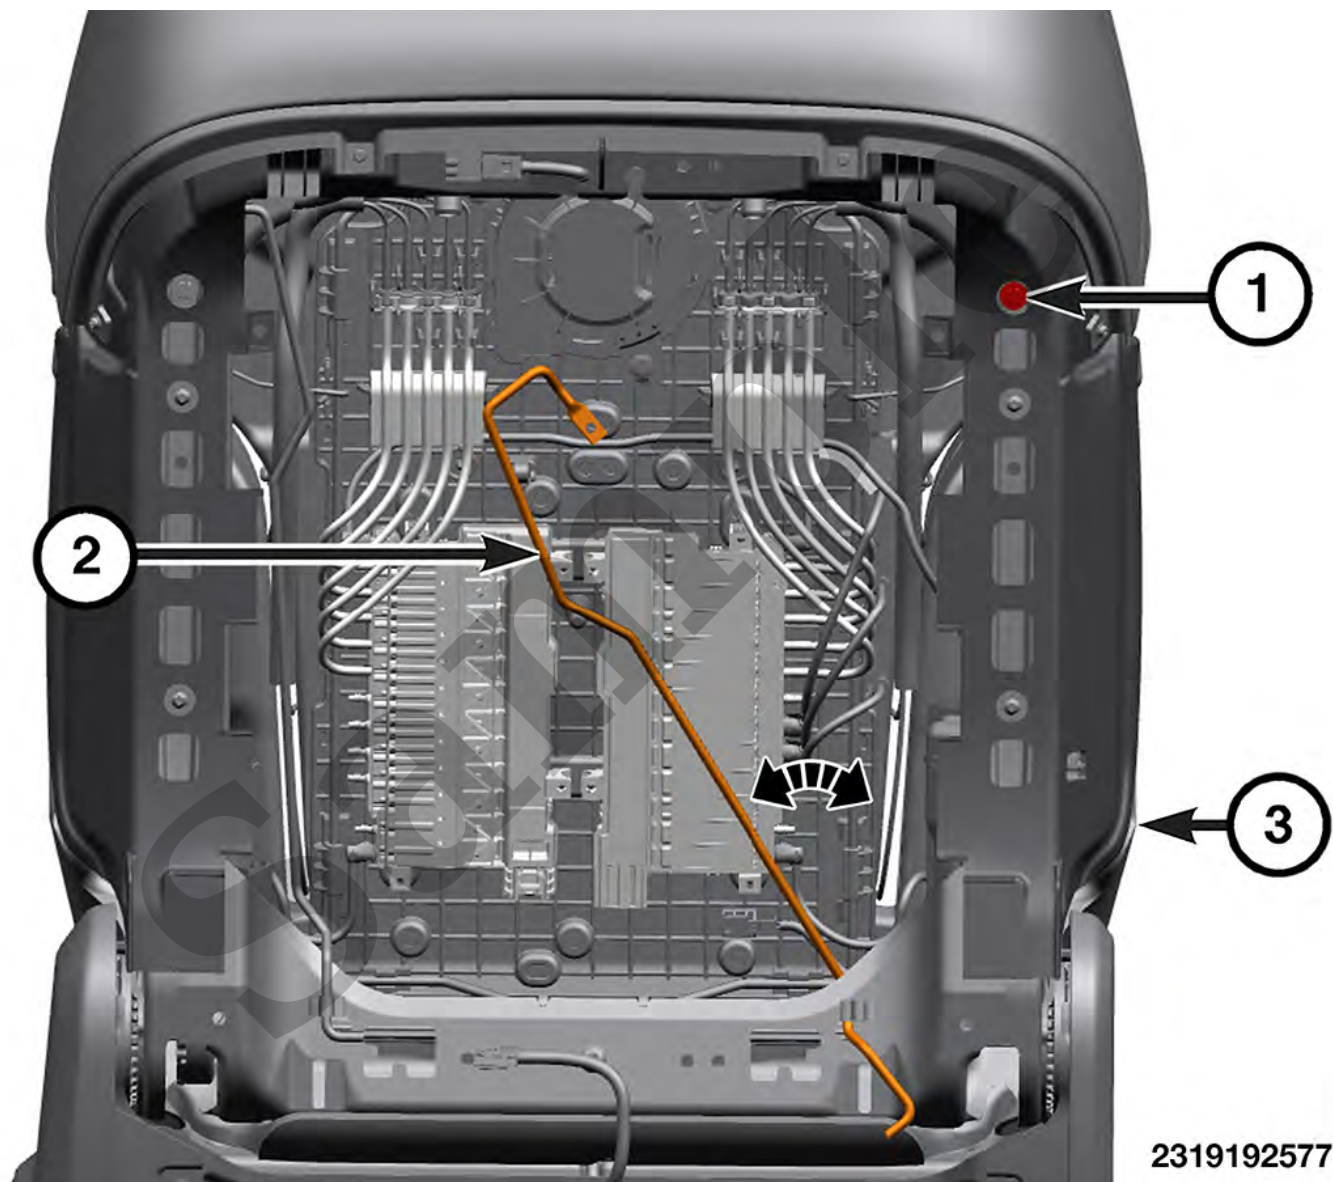

1 - Fastener

2 - Right Seat Wire

3 - Front Seat

YOUR CURRENT VEHICLE

## Massage Seat Air Cells

### MASSAGE SEAT AIR CELLS


#### REMOVAL

1. If servicing the seat back air cells, remove the seat back cover ([Refer to Body/Seats/COVER, Seat Back/Removal and Installation](#))([Refer To List 1](#)).
2. If servicing the seat cushion air cells, remove the seat cushion cover ([Refer to Body/Seats/COVER, Seat Cushion, Front/Removal and Installation](#))([Refer To List 2](#)).



ECU needs to be calibrated.

1. Before proceeding with the following repair procedure, review all warnings and cautions ([Refer to Body/Seats - Warning](#))([Refer To List 1](#)).
2. Remove the seat from the vehicle ([Refer to Body/Seats/SEAT/Removal and Installation](#))([Refer To List 2](#)).
3. Remove the seat back frame ([Refer to Body/Seats/FRAME, Seat Back, Front/Removal and Installation](#)).
4. Remove the seat cushion cover ([Refer to Body/Seats/COVER, Seat Cushion, Front/Removal and Installation](#))([Refer To List 3](#)).

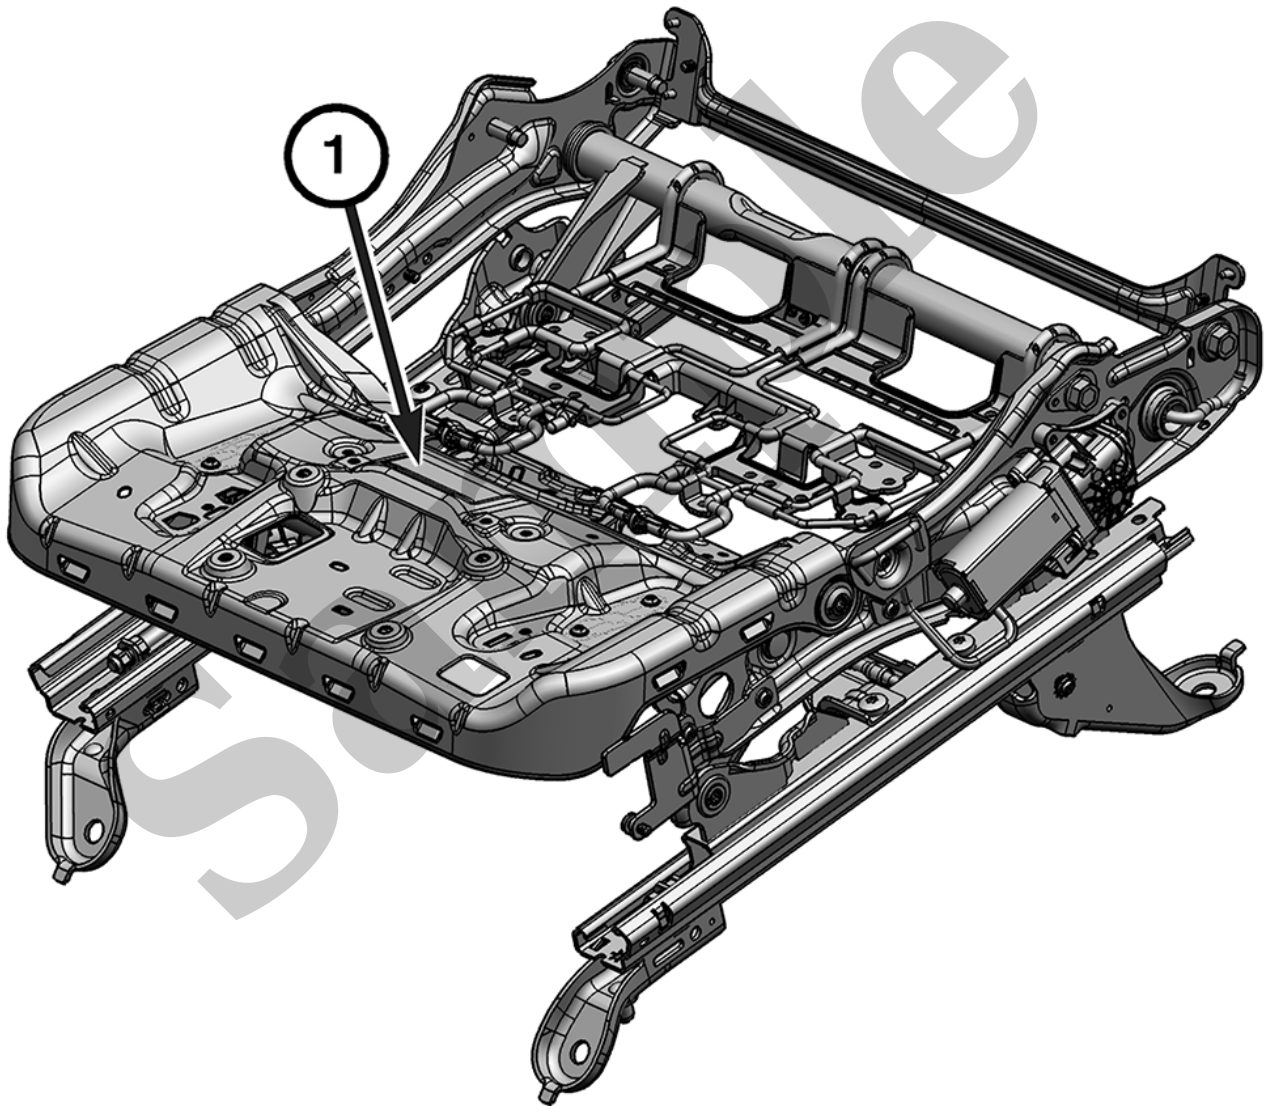

2321160510

1 - Seat Track Assembly

5. Remove any transferable components from the seat track assembly.

## **WARNING**

To avoid serious or fatal injury when handling a seat belt tensioner retractor. Exercise proper care to keep fingers out from under the retractor cover and away from the seat belt webbing where it exits from the retractor cover. Failure to follow these instructions may result in possible serious or fatal injury.

## **WARNING**

To avoid serious or fatal injury, replace all Supplemental Restraint System (SRS) components only with parts specified in the Mopar® Parts Catalog. Substitute parts may appear interchangeable, but internal differences may result in inferior occupant protection.

## **WARNING**

To avoid serious or fatal injury, the fasteners, screws, and bolts originally used for the Supplemental Restraint System (SRS) components must never be replaced with any substitutes. These fasteners have special coatings and are specifically designed for the SRS. Anytime a new fastener is needed, replace it with the correct fasteners provided in the service package or specified in the Mopar® Parts Catalog.

## **WARNING**

To avoid serious or fatal injury when a steering column has an airbag unit attached, never place the column on the floor or any other surface with the steering wheel or airbag unit face down. Failure to follow these instructions may result in possible serious or fatal injury.