

Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

1992 JEEP Grand Cherokee OEM Service and Repair Workshop Manual

[Go to manual page](#)


YOUR CURRENT VEHICLE

Bench Seat - Short Wheelbase Model

BENCH SEAT - SHORT WHEELBASE MODEL

REMOVAL

1. Fold the right seat to the folded position.

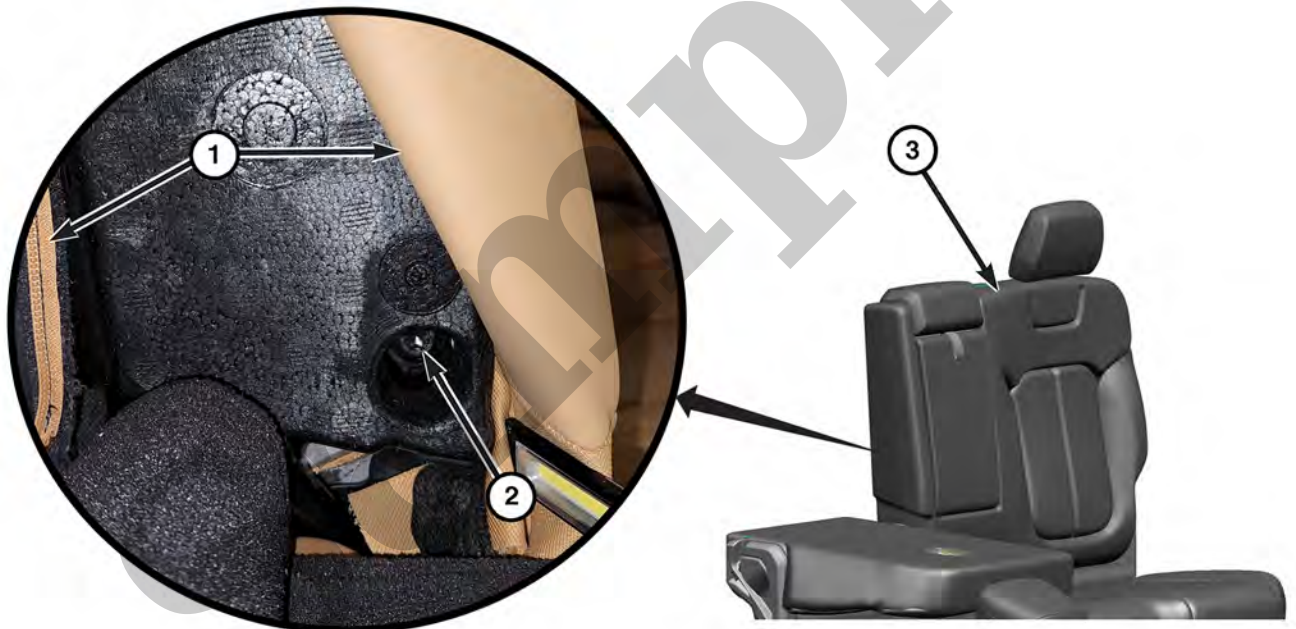

2319191047

1 - Seat Back Cover

2 - Armrest Fastener

3 - Bench Seat

1 - Armrest Fastener


2. Using suitable tool, remove the armrest fastener cover from the armrest.
3. Remove the armrest fastener and remove the armrest.

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle.

Sample


3. Open the cable junction block and disconnect the release handle cable.
4. If necessary, remove the fasteners that secure the release handle to the seat back frame and slide of the release handle to remove it from the seat.

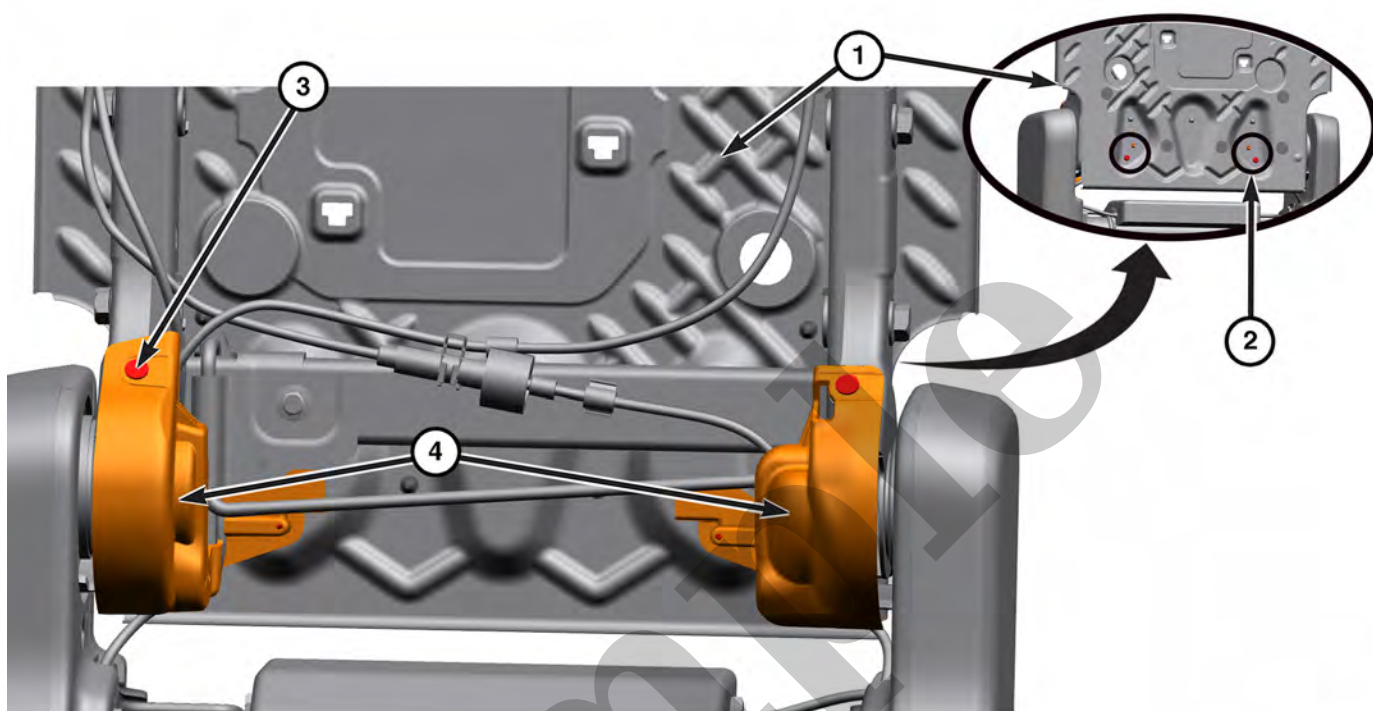

2319190701

- | |
|------------------------|
| 1 - Seat Back Frame |
| 2 - Screws |
| 3 - Push-Pin Fasteners |
| 4 - Adjuster Guards |

5. Remove the fasteners from the back side of the seat back frame.
6. Working on the front side of the seat back frame, remove the push-pin fasteners and remove the adjuster guards from the seat back frame.

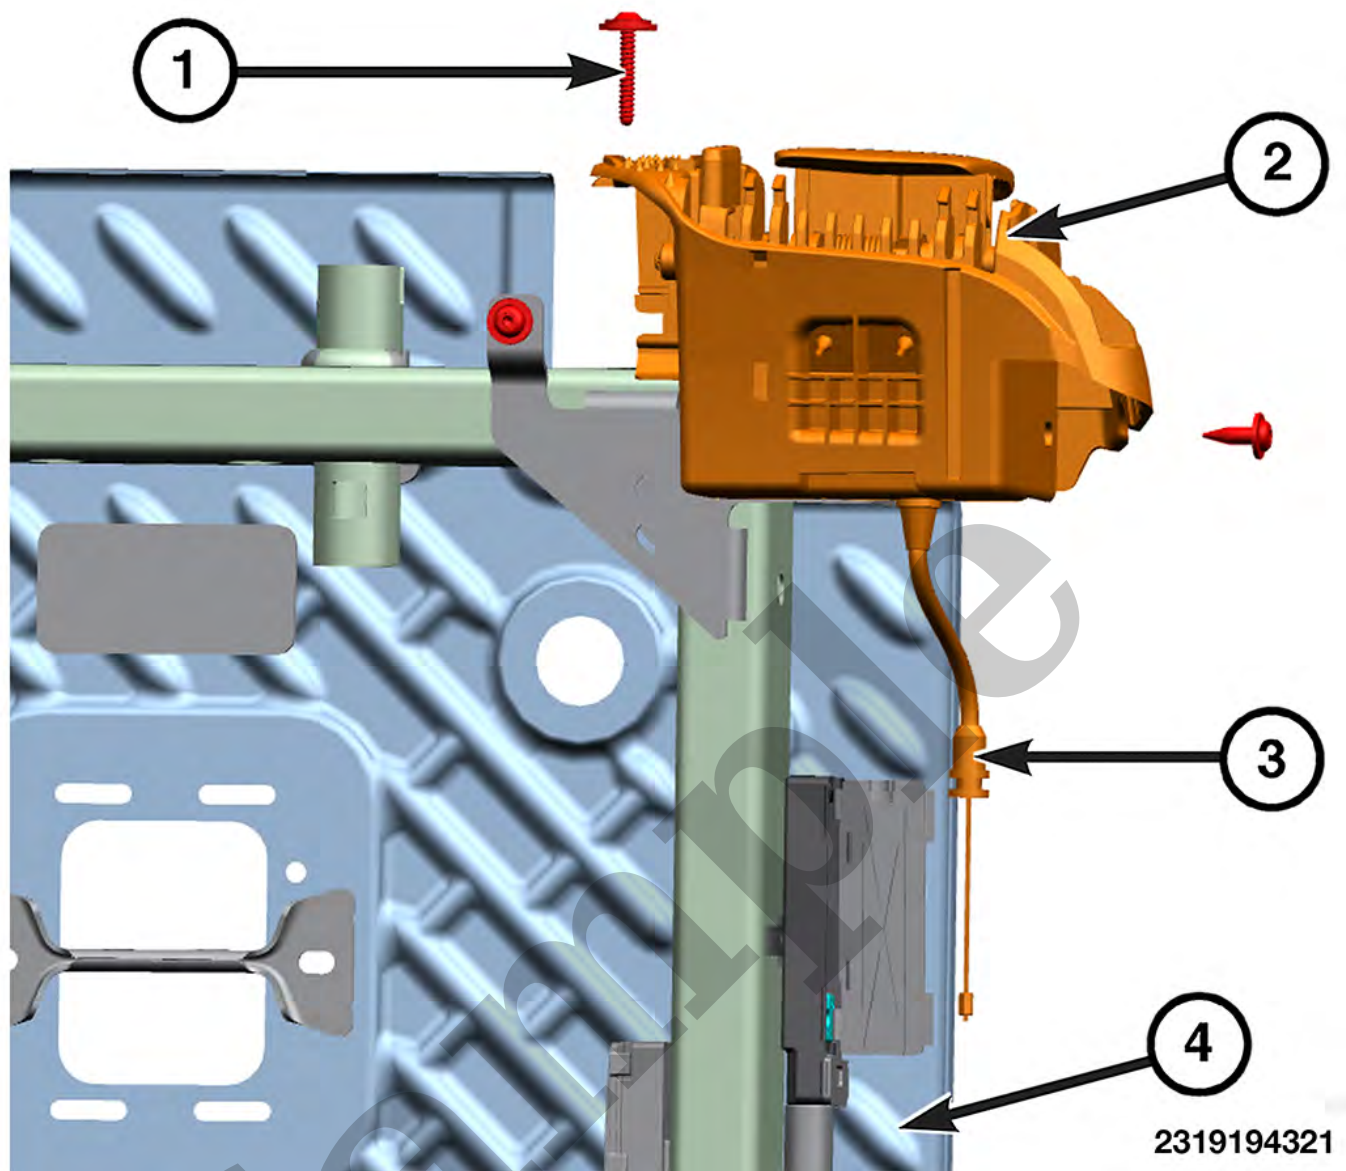

1 - Fasteners

2 - Release Handle

3 - Release Handle Cable

4 - Seat Back Frame

3. Open the cable junction block and disconnect the release handle cable.

4. If necessary, remove the fasteners that secure the release handle to the seat back frame and slide of the release handle to remove it from the seat.


YOUR CURRENT VEHICLE

Release Cable Bucket Seat - Long Wheelbase Model

RELEASE CABLE BUCKET SEAT - LONG WHEELBASE MODEL

REMOVAL

1. Remove the seat cushion cover assembly ([Refer to Body/Seats/COVER, Seat Cushion, Second Row/Removal and Installation](#))([Refer To List 1](#)).
2. Remove the seat back cover assembly ([Refer to Body/Seats/COVER, Seat Back/Removal and Installation](#)) ([Refer To List 2](#)).

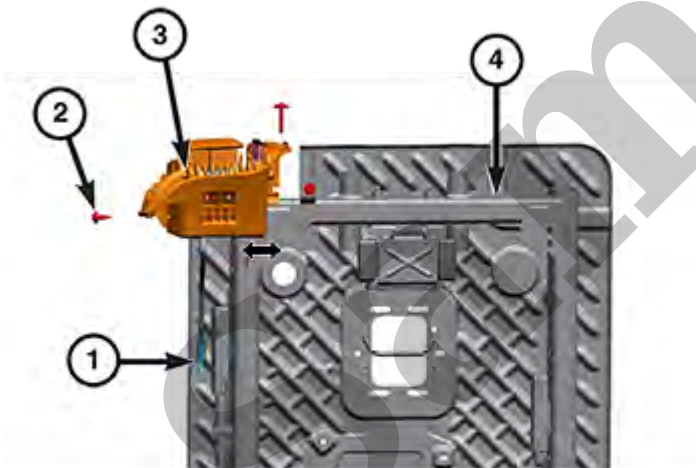

2319190703

1 - Release Handle Cable

2 - Fasteners

3 - Release Handle

4 - Seat Back Frame

YOUR CURRENT VEHICLE

Bench Seat - Long Wheelbase Model


BENCH SEAT - LONG WHEELBASE MODEL

REMOVAL

1. Gain access to the seat through the rear doors.

NOTE

60% seat shown, 40% seat similar.

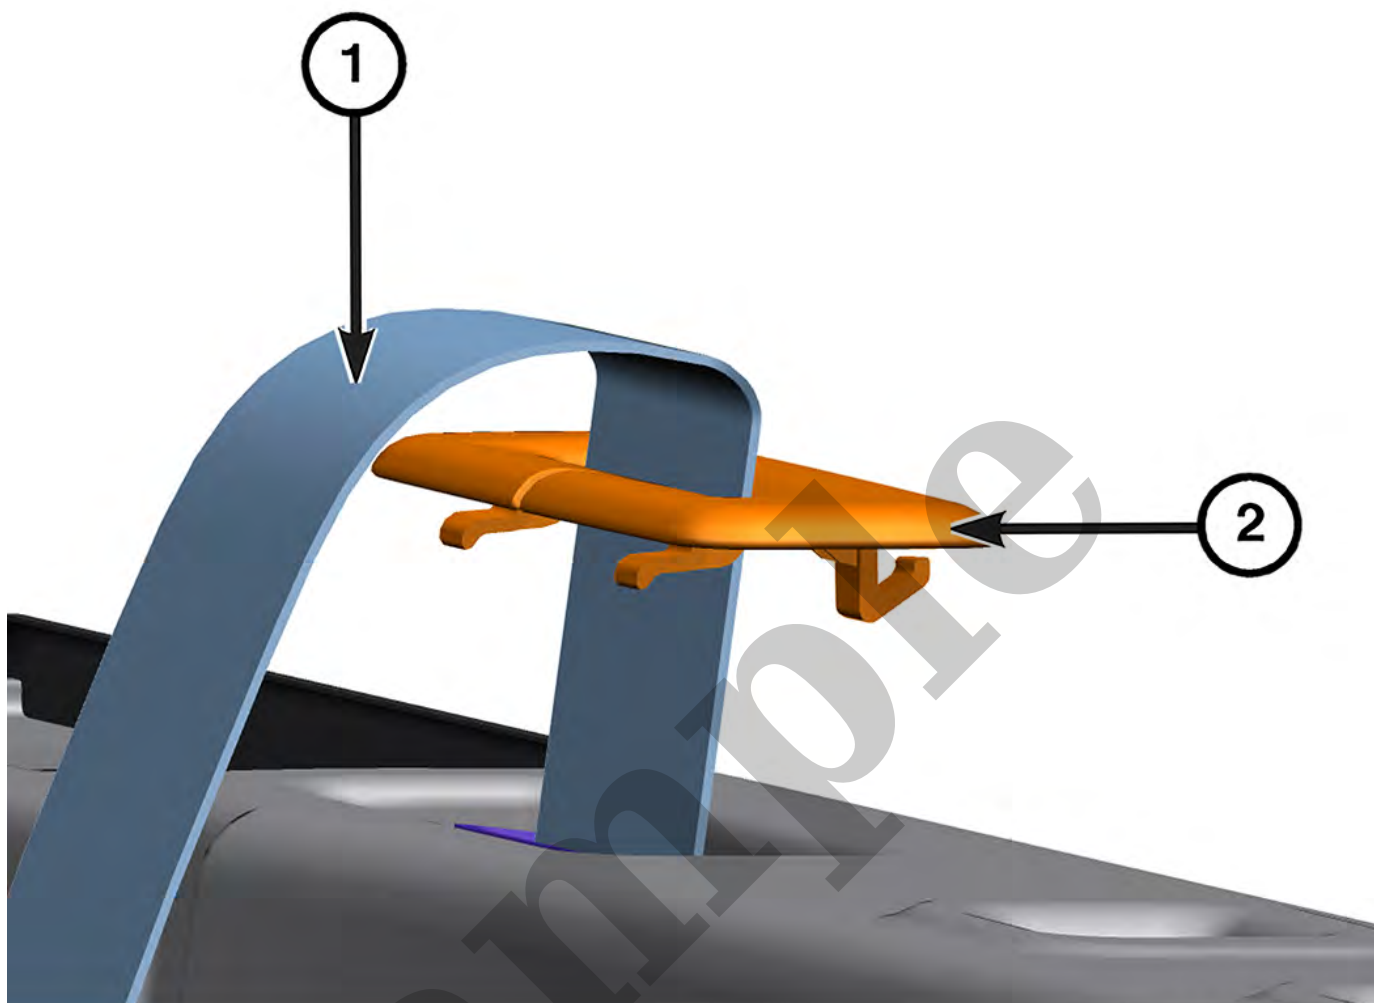

2319191046

1 - Center Seat Belt

2 - Center Seat Belt Bezel

12. Disengage the center seat belt bezel, route the seat belt through the slit and remove the seat belt bezel from the seat.

YOUR CURRENT VEHICLE

Bench Seat - Short Wheelbase Model

BENCH SEAT - SHORT WHEELBASE MODEL

REMOVAL

NOTE

60% seat shown 40% similar.

1. Remove the seat from the vehicle ([Refer to Body/Seats/SEAT/Removal and Installation](#))(Refer To List 1).
2. If the 60% cover is to be serviced, remove the armrest ([Refer to Body/Seats/ARMREST/Removal and Installation](#)).



2319191052

1 - Seat Back Cover

2 - Hog Rings

3 - Seat Back Foam

10. If necessary, pull the seat back cover away from the seat foam, release the velcro and cut the hog rings to separate.

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle.

Refer To List:

List 1