


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

1998 CHEVROLET Cavalier OEM Service and Repair Workshop Manual

[Go to manual page](#)

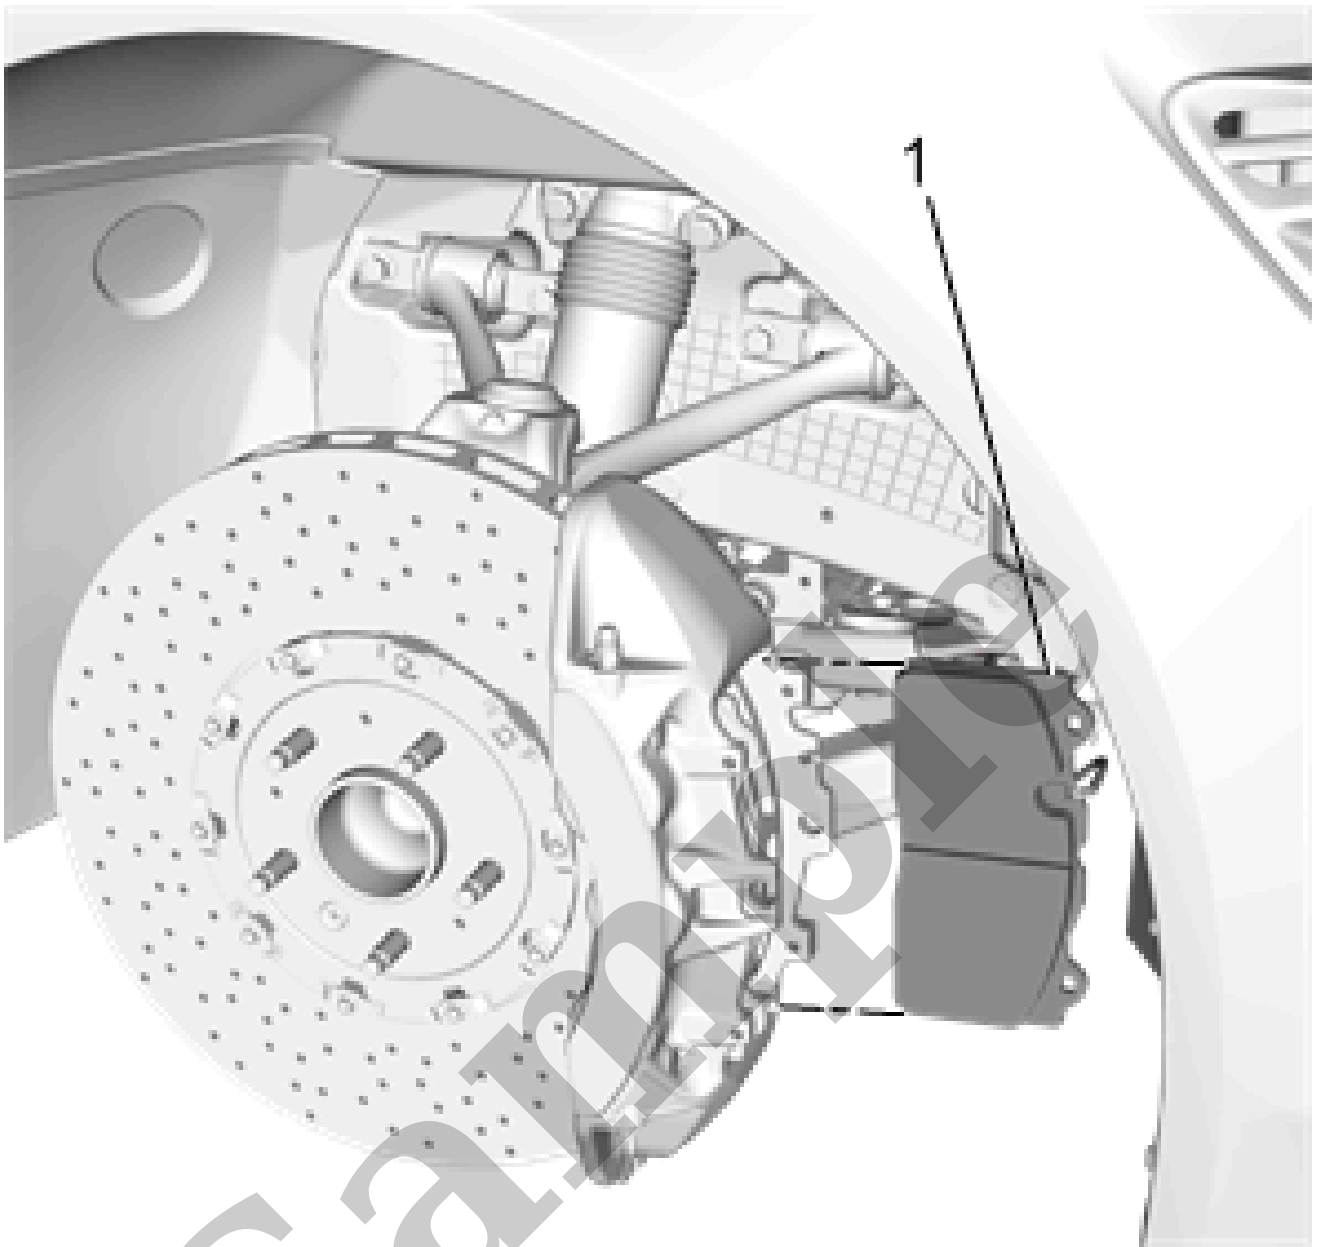


13.

Remove the inner disc brake pad and wear sensor assembly (1).

18. Perform the [Brake Rotor Thickness Measurement](#).

Installation Procedure

1. If removed, install the front brake rotor. Refer to [Front Brake Rotor Replacement](#).

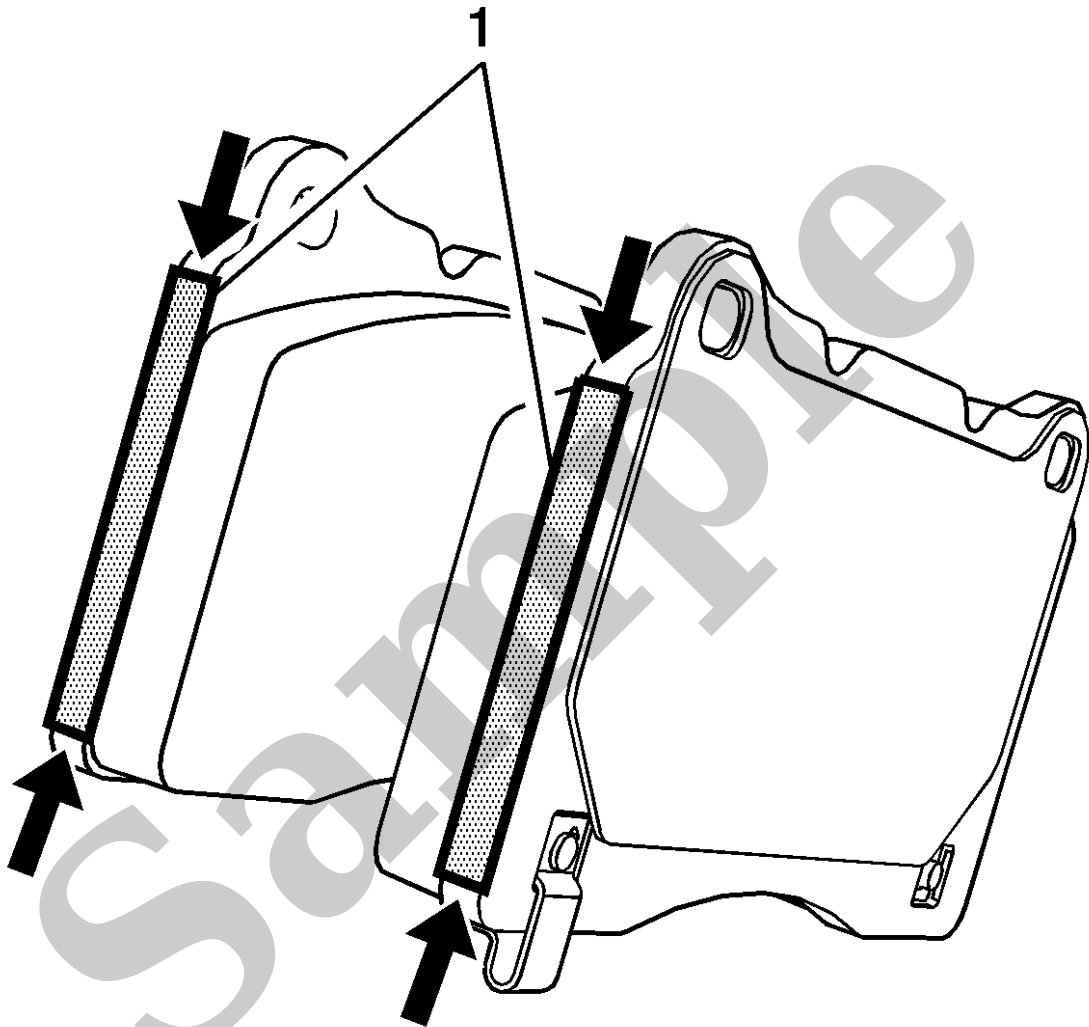


2.

NOTE

Note


Do not allow the anti-seize lubricant to contact the disc brake pad friction surfaces.

Apply approximately 0.09-0.15 g (0.003-0.005 oz) of anti-seize lubricant to each end of the disc brake pad abutments (1) which contact the brake caliper. Refer to [Adhesives, Fluids, Lubricants, and Sealers](#).

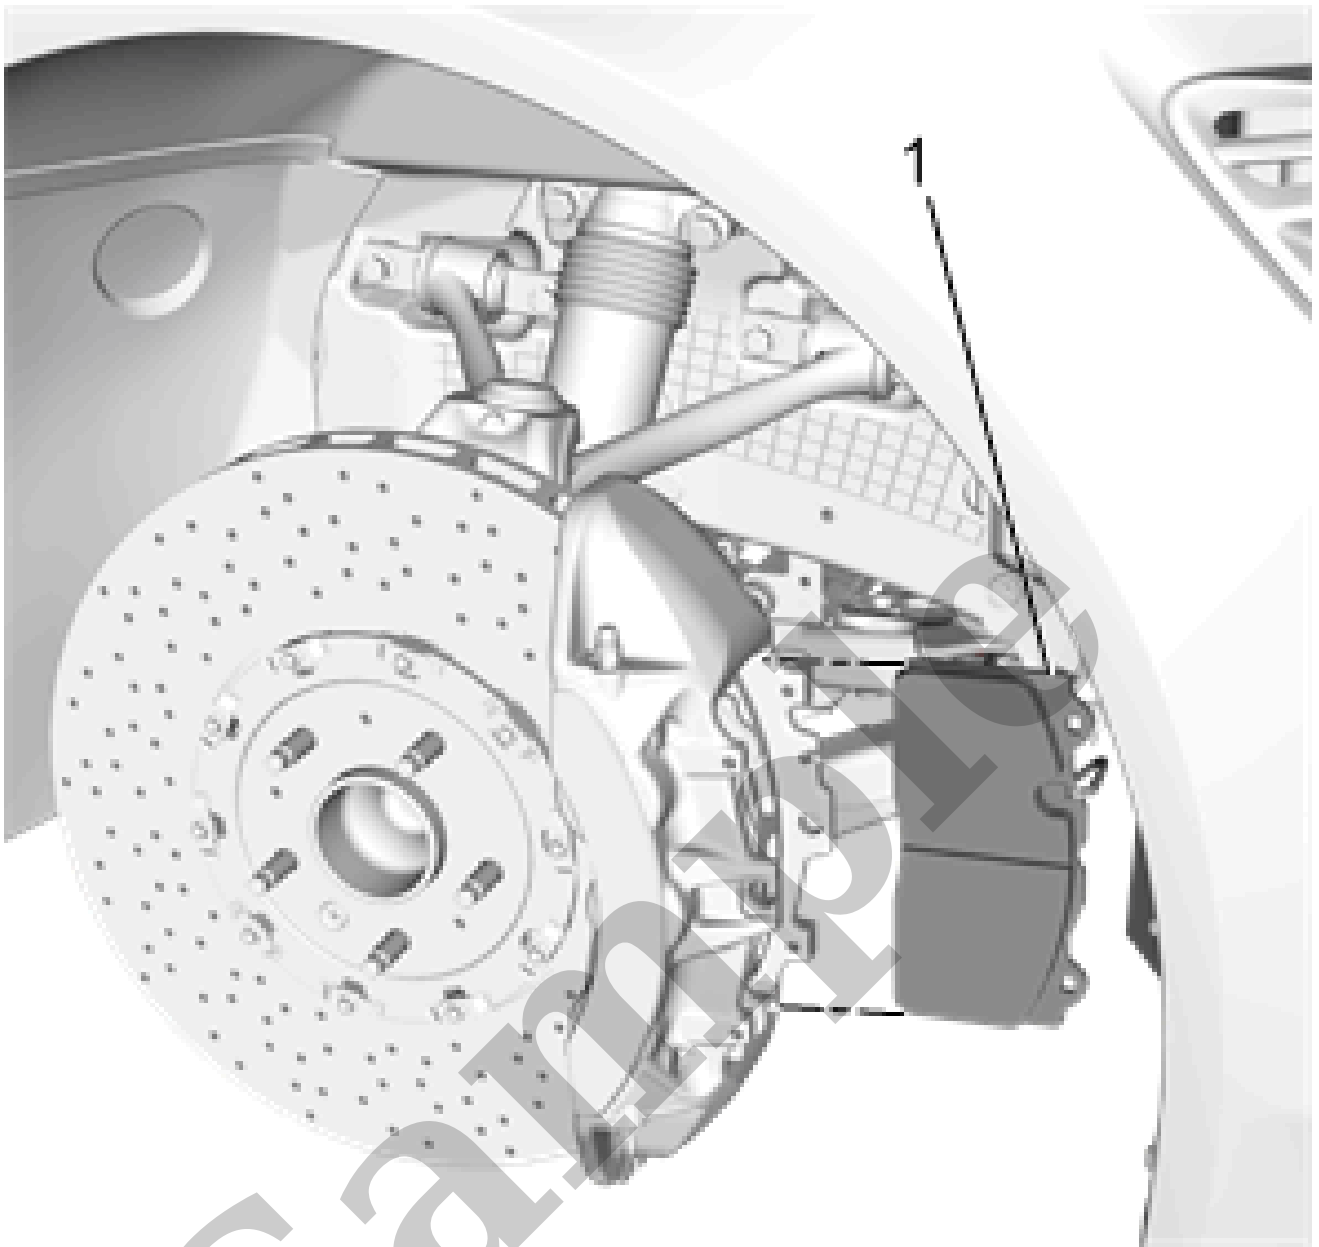

5.

Install the inner disc brake pad and wear sensor assembly (1).

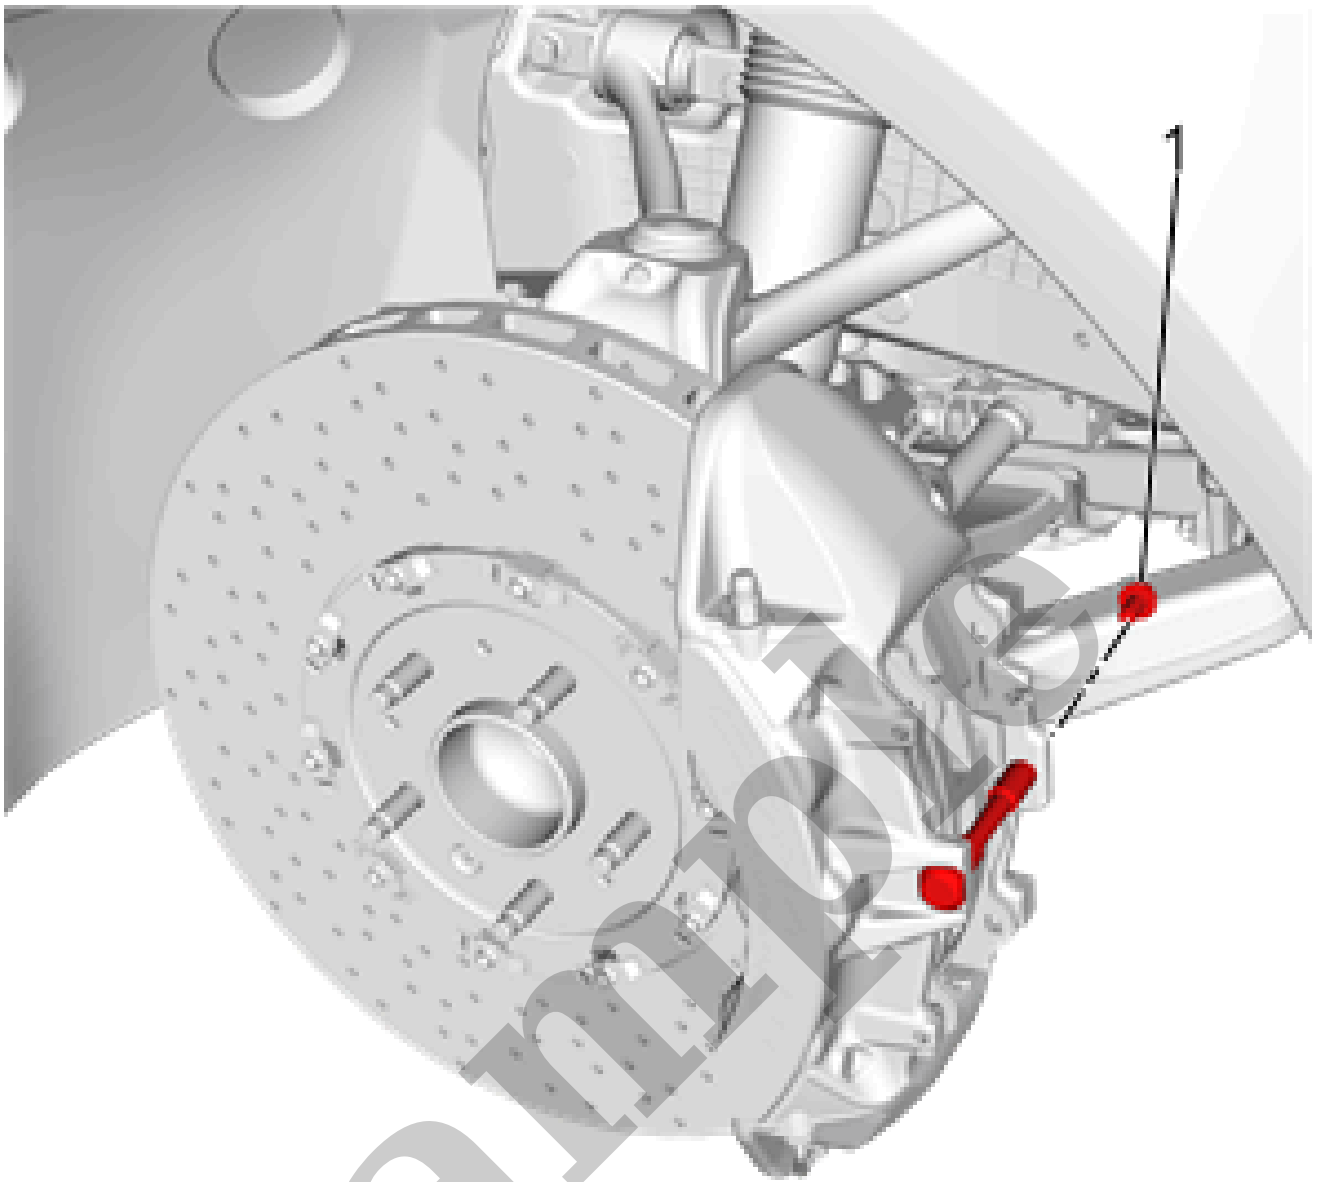

7.

CAUTION

Caution

Refer to [Fastener Caution](#).

Install the brake caliper bridge pin bolt (1) and tighten the bolt to **30 N·m (22 lb ft)**.