


## Your Ultimate Source for OEM Repair Manuals


FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

1998 VOLVO V70 R OEM Service and Repair Workshop Manual


Go to manual page

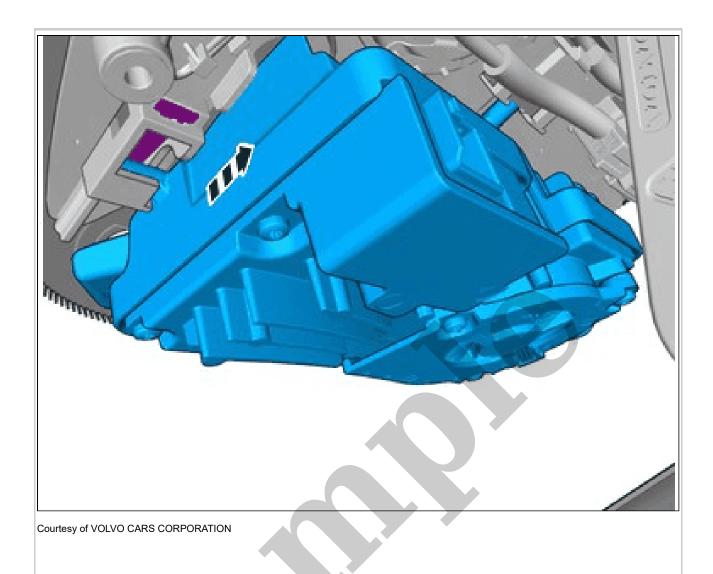

Pull the component in direction of the arrow. Repeat on the other side.

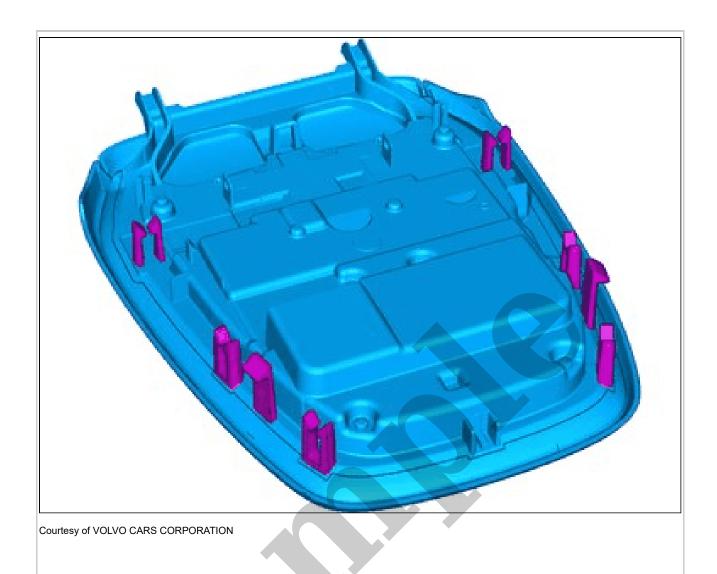


**NOTE:** The graphic shows the back of the component before removal.

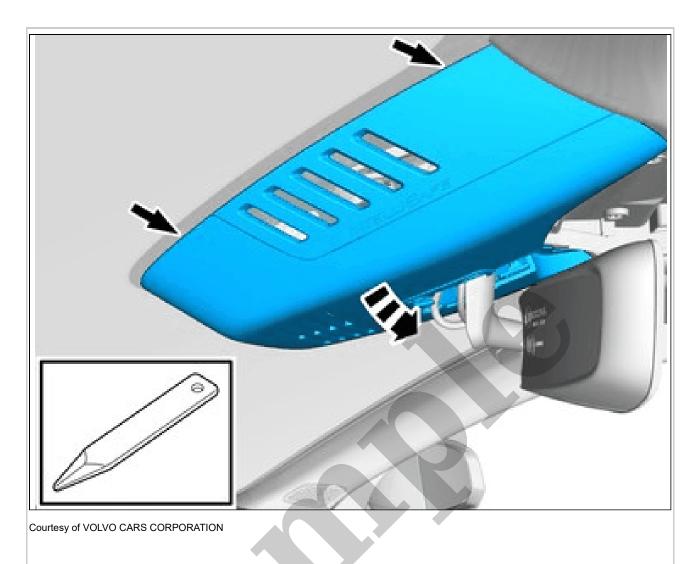

Release the catches.
Repeat on the other side.

Remove the marked part. **Use:** Interior trim remover

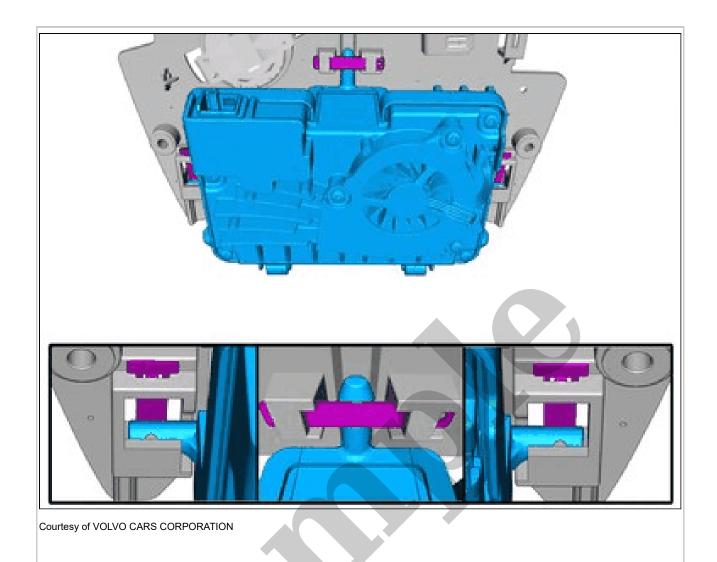

CAUTION: Do not touch the camera lens.

**CAUTION:** Make sure the component is fitted as illustrated.

Ensure that all clips engage.

Check that the component has locked in its position.


To install, reverse the removal procedure.

Calibrate FLC2 according to: Diagnostics / Components / Control modules / Forward looking camera (FLC2) / Diagnostic sequences /Calibration of forward looking camera (FLC2)


**NOTE:** The following steps are only necessary when installing a new component.

Order and download the appropriate software according to: VIDA/Software/Hardware Changes


Set the vehicle to Inactive mode, described in user mode. Refer to: USAGE MODE

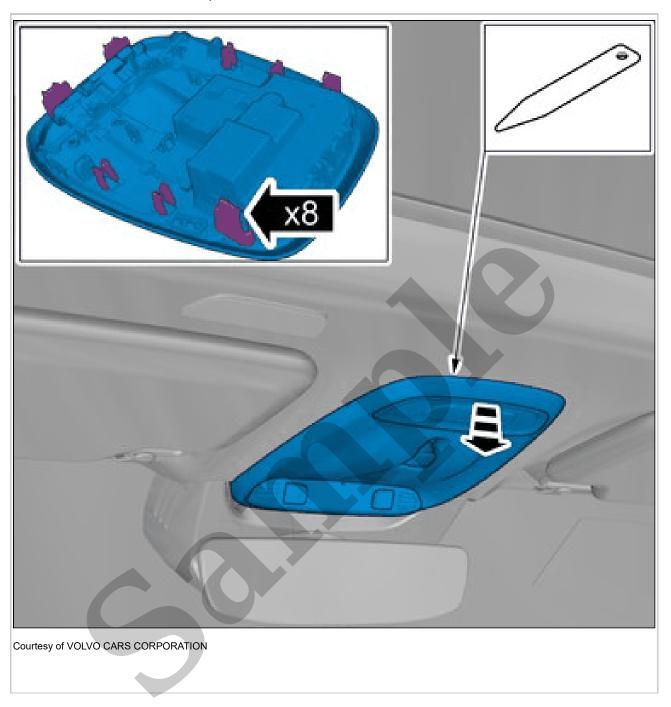

Remove the marked part.

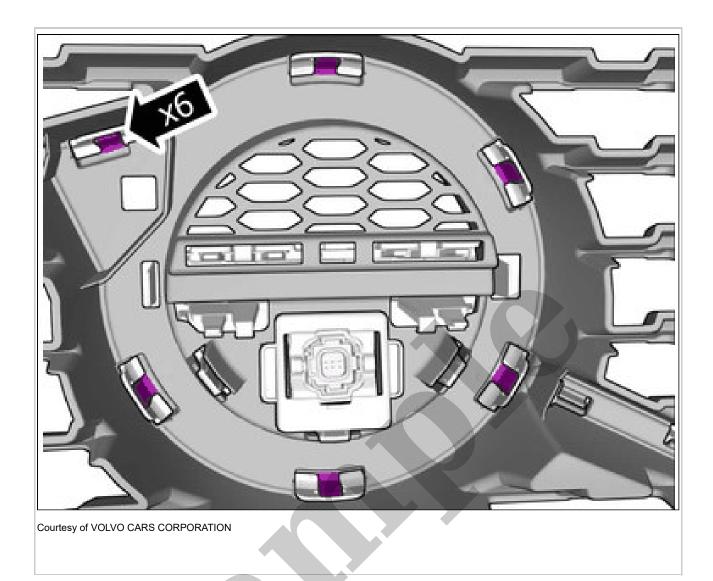

Release the locks.

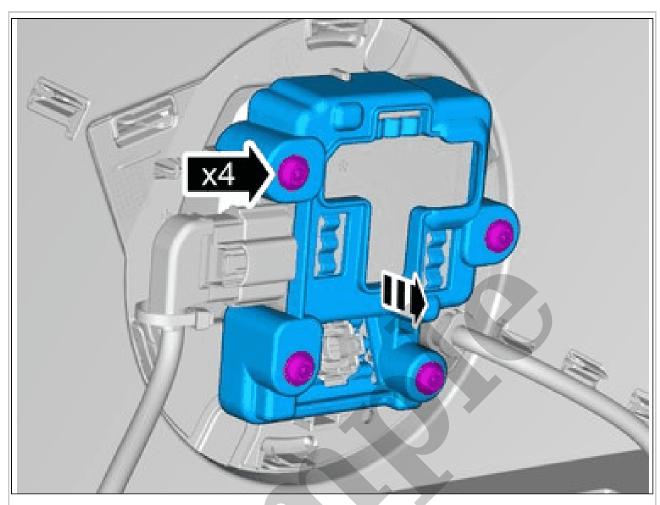


Courtesy of VOLVO CARS CORPORATION


Remove the screws.
Remove the marked part.

## PARKING ASSISTANCE CAMERA, SIDE > PARKING ASSISTANCE CAMERA, SIDE [2018-2022] > REMOVAL

Set the vehicle to Inactive mode, described in user mode. Refer to: USAGE MODE Remove turn indicator, external mirror. Refer to: TURN INDICATOR, EXTERNAL MIRROR Remove relevant side turn indicator, external mirror. Refer to: TURN INDICATOR, EXTERNAL MIRROR

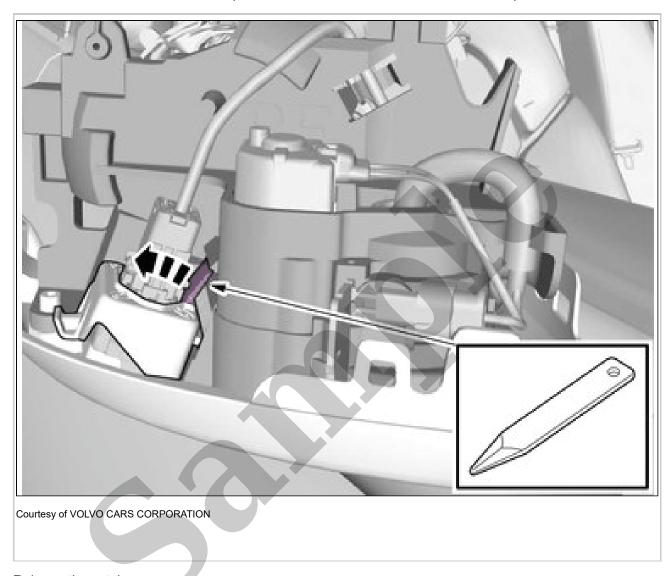

Release the catch.

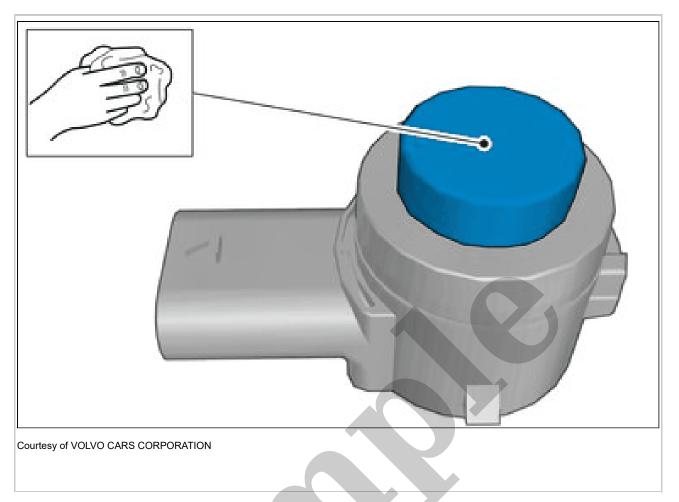

Use: Cleaning agent, 1161721