


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

2000 JEEP Grand Cherokee OEM Service and Repair Workshop Manual


[Go to manual page](#)

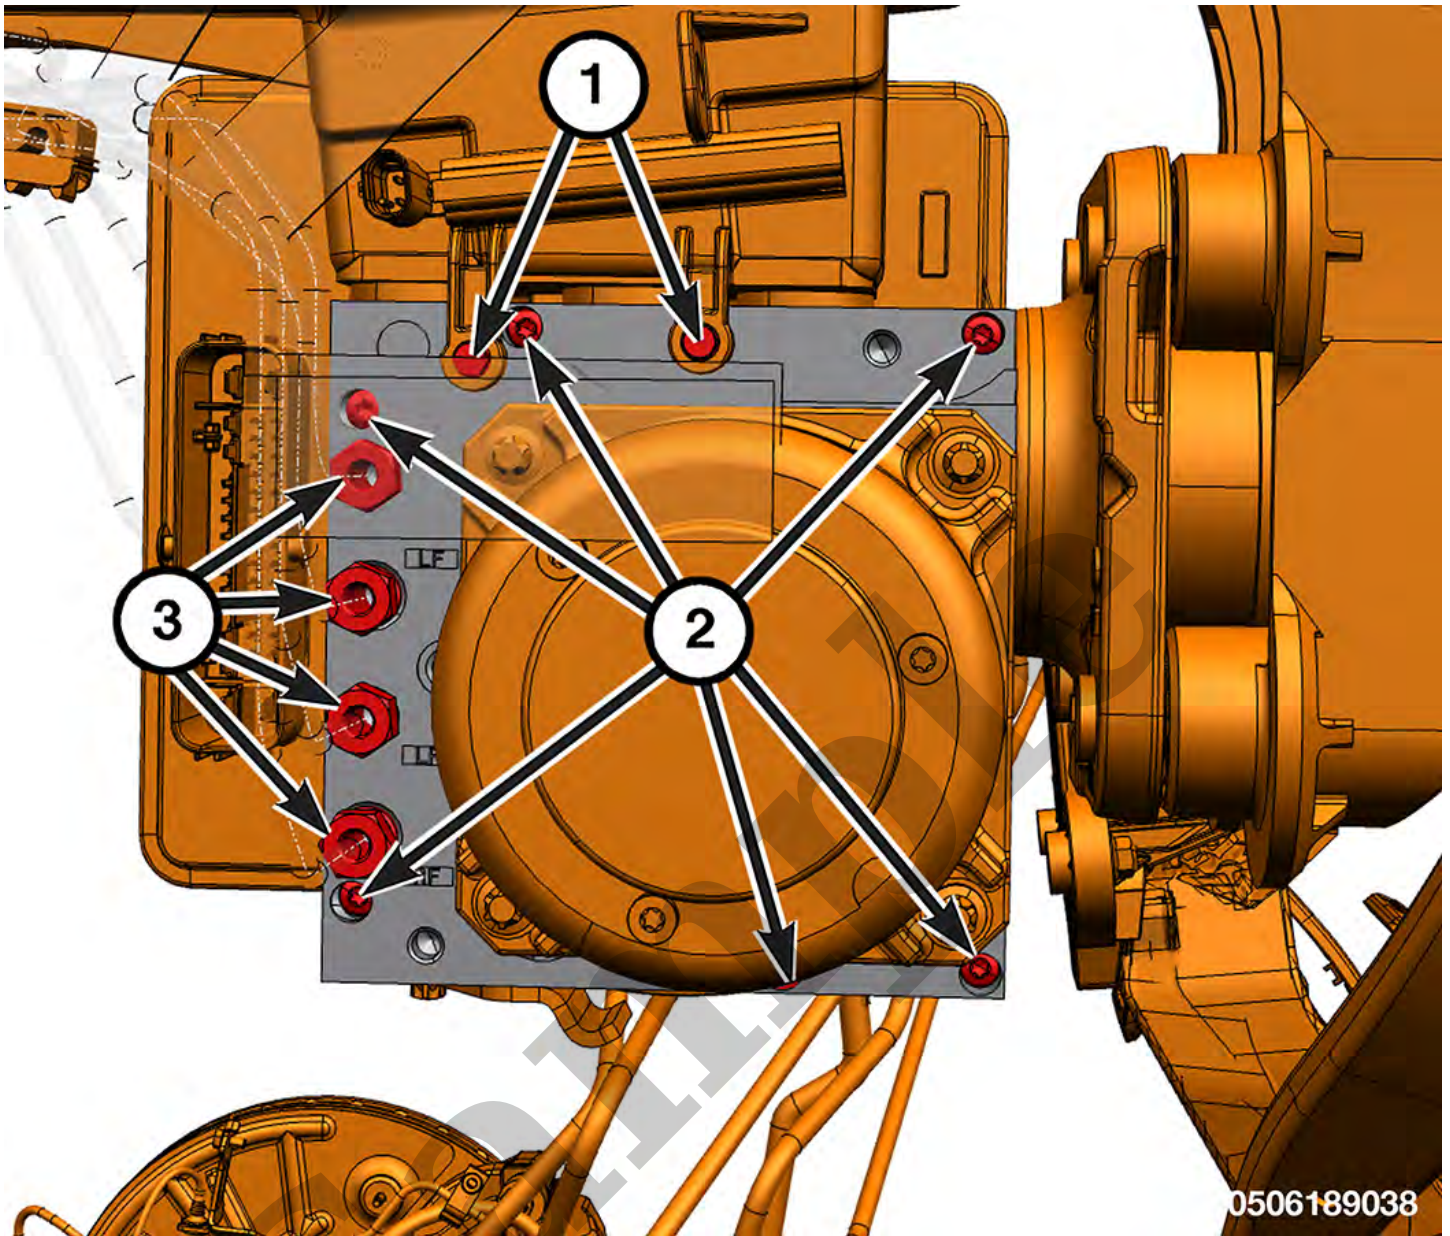

0506189038

CALLOUT	DESCRIPTION	SPECIFICATION	COMMENT
1	Brake Fluid Reservoir Bolts	8 N·m (71 In. Lbs.)	—
2	Brake System Control Module (BSCM) Bolts (First Stage)	2.75 N·m (24 In. Lbs.)	Do not reuse these fasteners. If removed, a new fastener must be installed and tightened to specifications.
	Brake System Control Module (BSCM) Bolts (Second Stage)	3.5 N·m (31 In. Lbs.)	

TORQUE SPECIFICATIONS - FRONT BRAKES

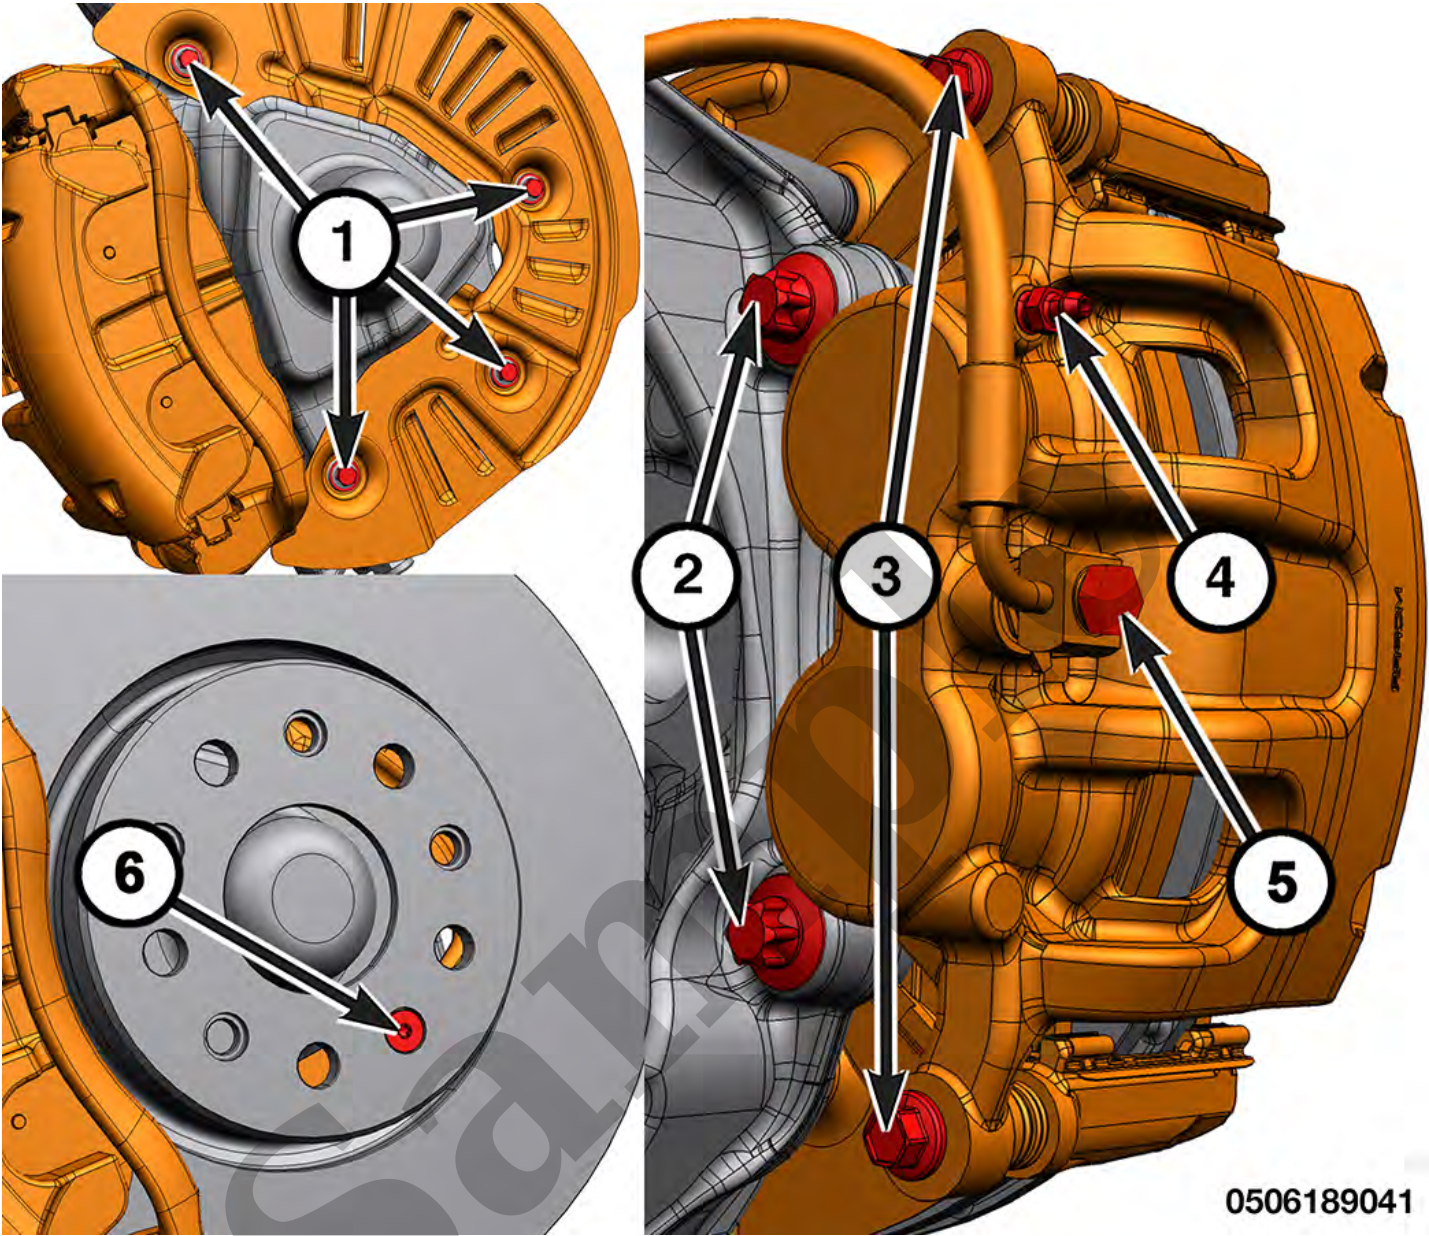


0506189041


CALLOUT	DESCRIPTION	SPECIFICATION	COMMENT
1	Brake Rotor Splash Shield Bolts	11 N·m (8 Ft. Lbs.)	—
2	Front Caliper Adapter Bolts	170 N·m (125 Ft. Lbs.)	—
3	Front Caliper Bolts	60 N·m (44 Ft. Lbs.)	—
4	Front Caliper Bleed Screw	17 N·m (13 Ft. Lbs.)	—
5	Front Brake Hose Banjo Bolt	35 N·m (26 Ft. Lbs.)	—

- Use a suitable tool to retract the brake caliper pistons.
- Apply brake pressure several times to seat the brake pads and obtain a firm brake pedal.
- Verify proper brake fluid level in the brake fluid reservoir.
- If a DTC sets during pedal pumping refer to the appropriate diagnostic information ([Refer to DTC-Based Diagnostics/MODULE, Brake System Control \(BSCM\)/Diagnosis and Testing](#))(Refer To List 1).

TORQUE SPECIFICATIONS - REAR BRAKES

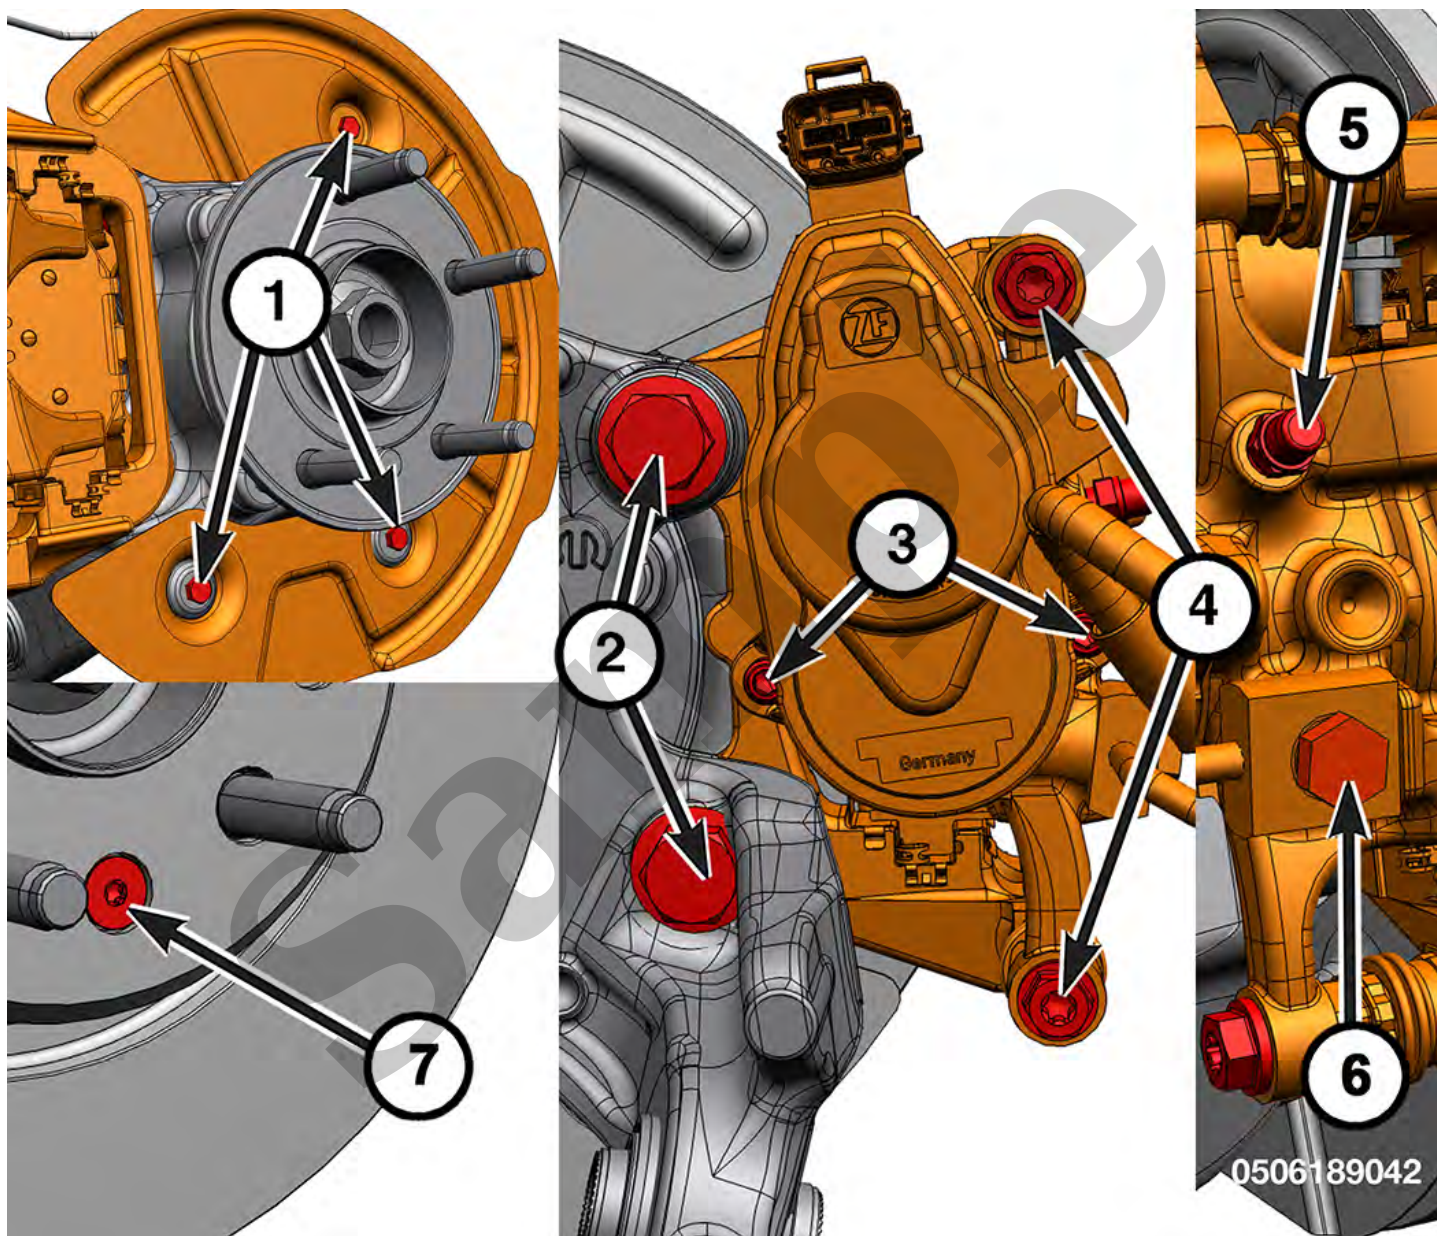

CALLOUT	DESCRIPTION	SPECIFICATION	COMMENT
1	Brake Rotor Splash Shield Bolts	8 N·m (71 In. Lbs.)	—
2	Rear Caliper Adapter Bolts	120 N·m (89 Ft. Lbs.)	—

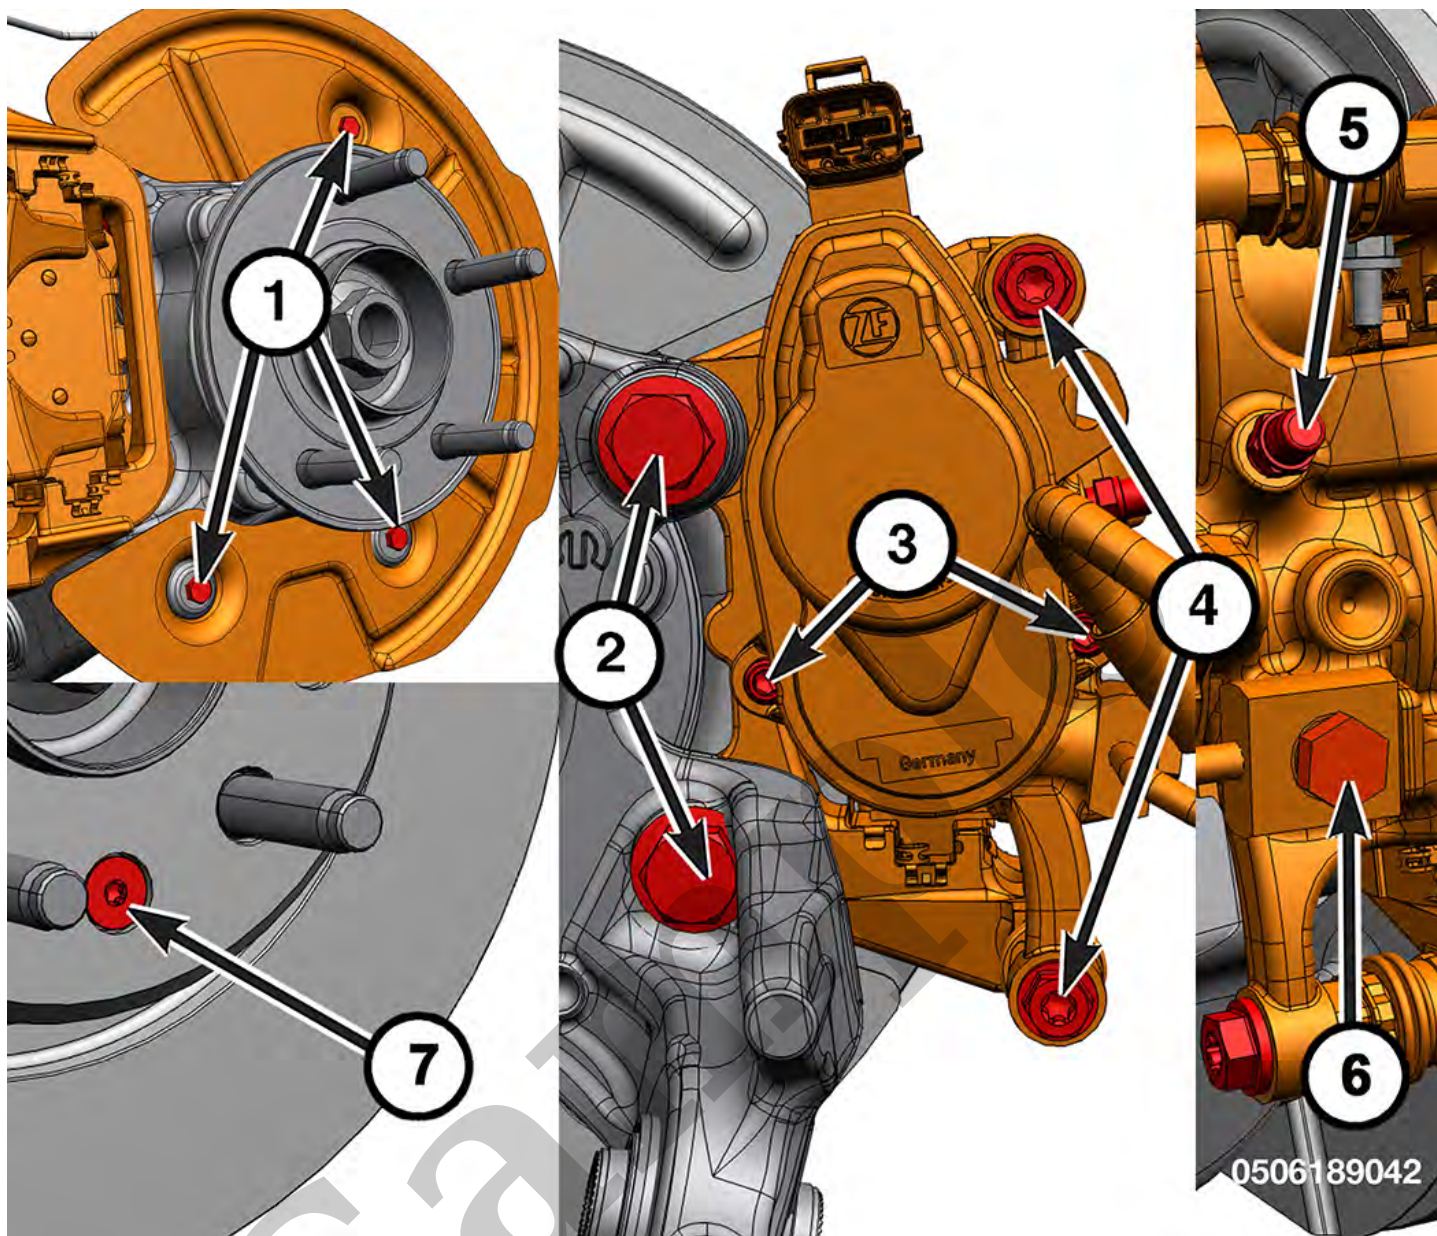


CALLOUT	DESCRIPTION	SPECIFICATION	COMMENT
1	Brake Rotor Splash Shield Bolts	8 N·m (71 In. Lbs.)	—
2	Rear Caliper Adapter Bolts	120 N·m (89 Ft. Lbs.)	—
3	Actuator Bolt	12 N·m (9 Ft. Lbs.)	—
4	Rear Caliper Bolts	36 N·m (27 Ft. Lbs.)	—
5	Rear Caliper Bleed Screw	10 N·m (7 Ft. Lbs.)	—
6	Rear Brake Hose Banjo Bolt	35 N·m (26 Ft. Lbs.)	—


YOUR CURRENT VEHICLE

Special Tools

SPECIAL TOOLS

Set, Dial Indicator

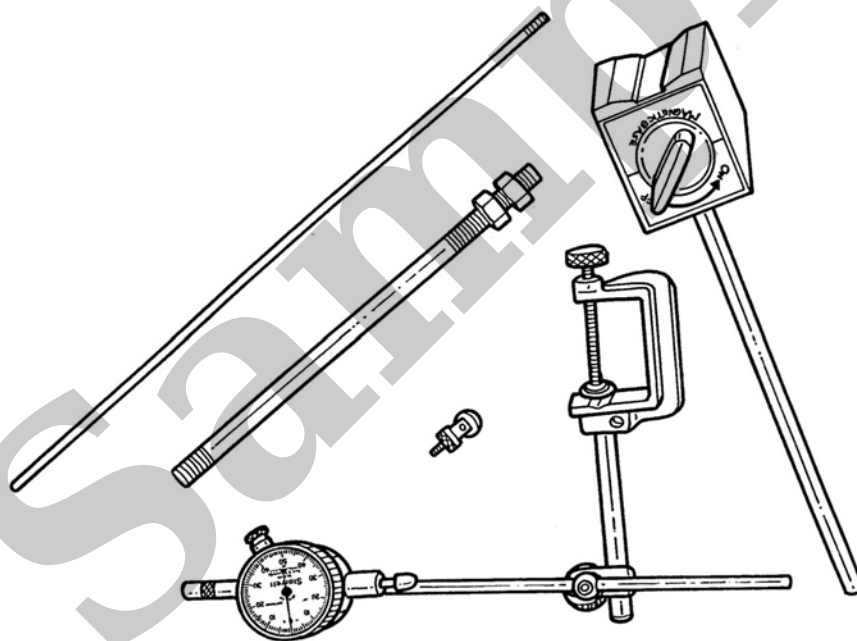


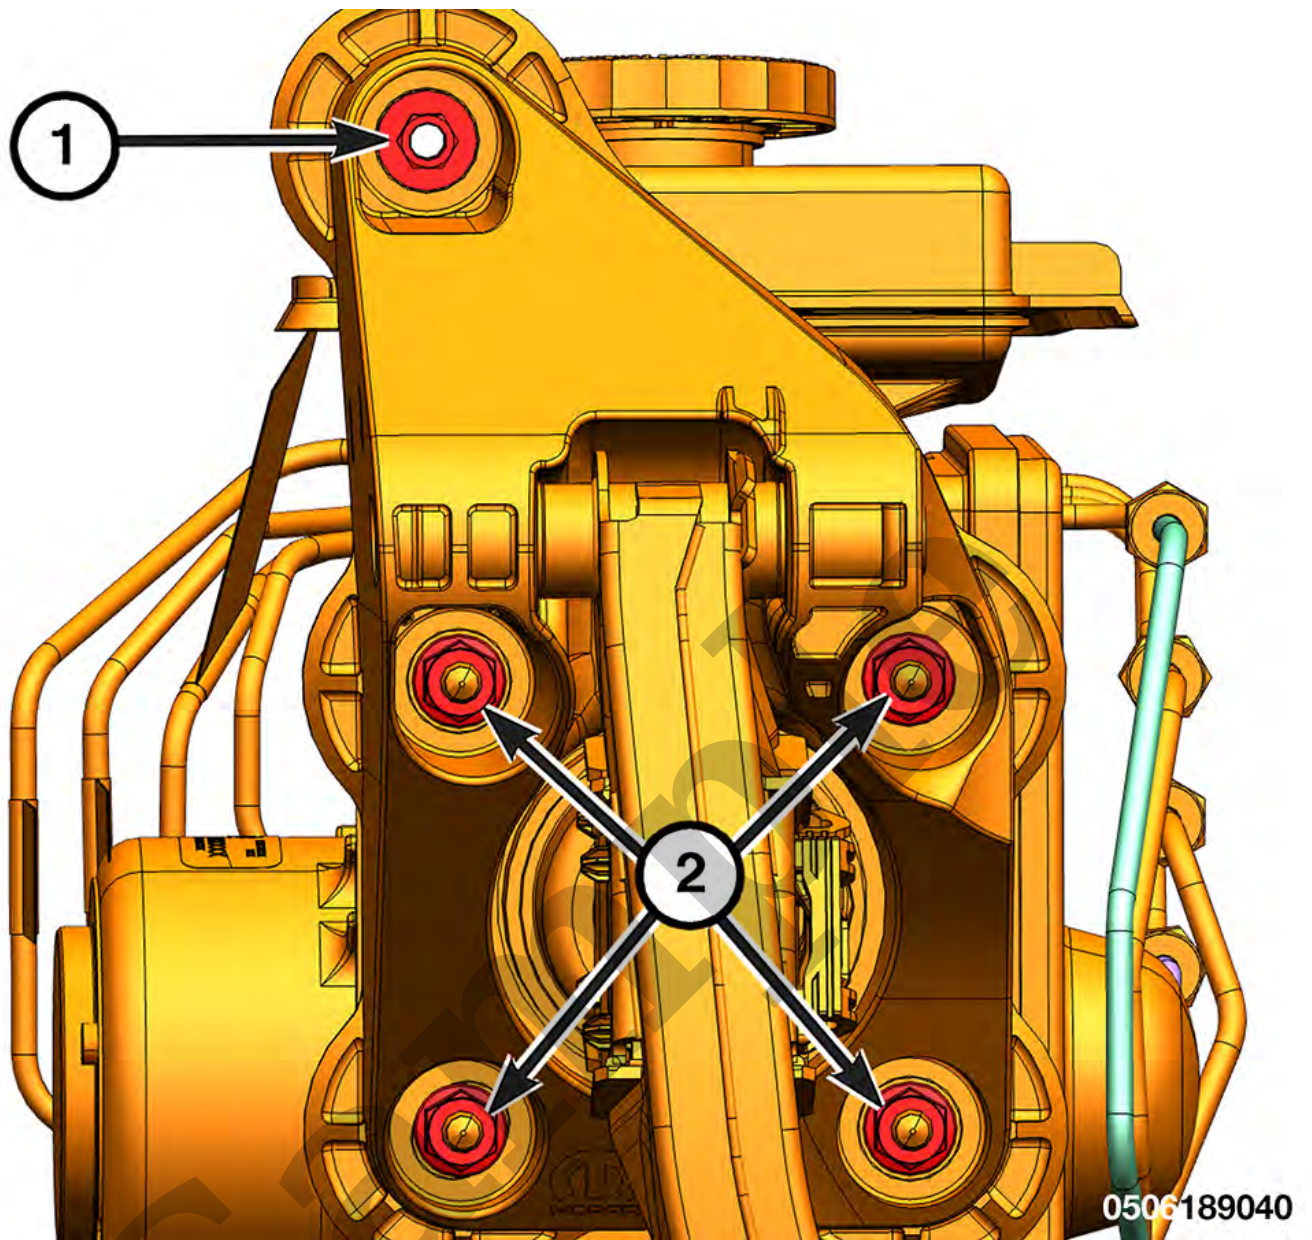

CALLOUT	DESCRIPTION	SPECIFICATION	COMMENT
1	Pedal Sled Nut	9 N·m (80 In. Lbs.)	—


6	Rear Brake Hose Banjo Bolt	35 N·m (26 Ft. Lbs.)	—
7	Brake Rotor Bolt	20 N·m (15 Ft. Lbs.)	—

TORQUE SPECIFICATIONS - WHEEL SPEED SENSOR

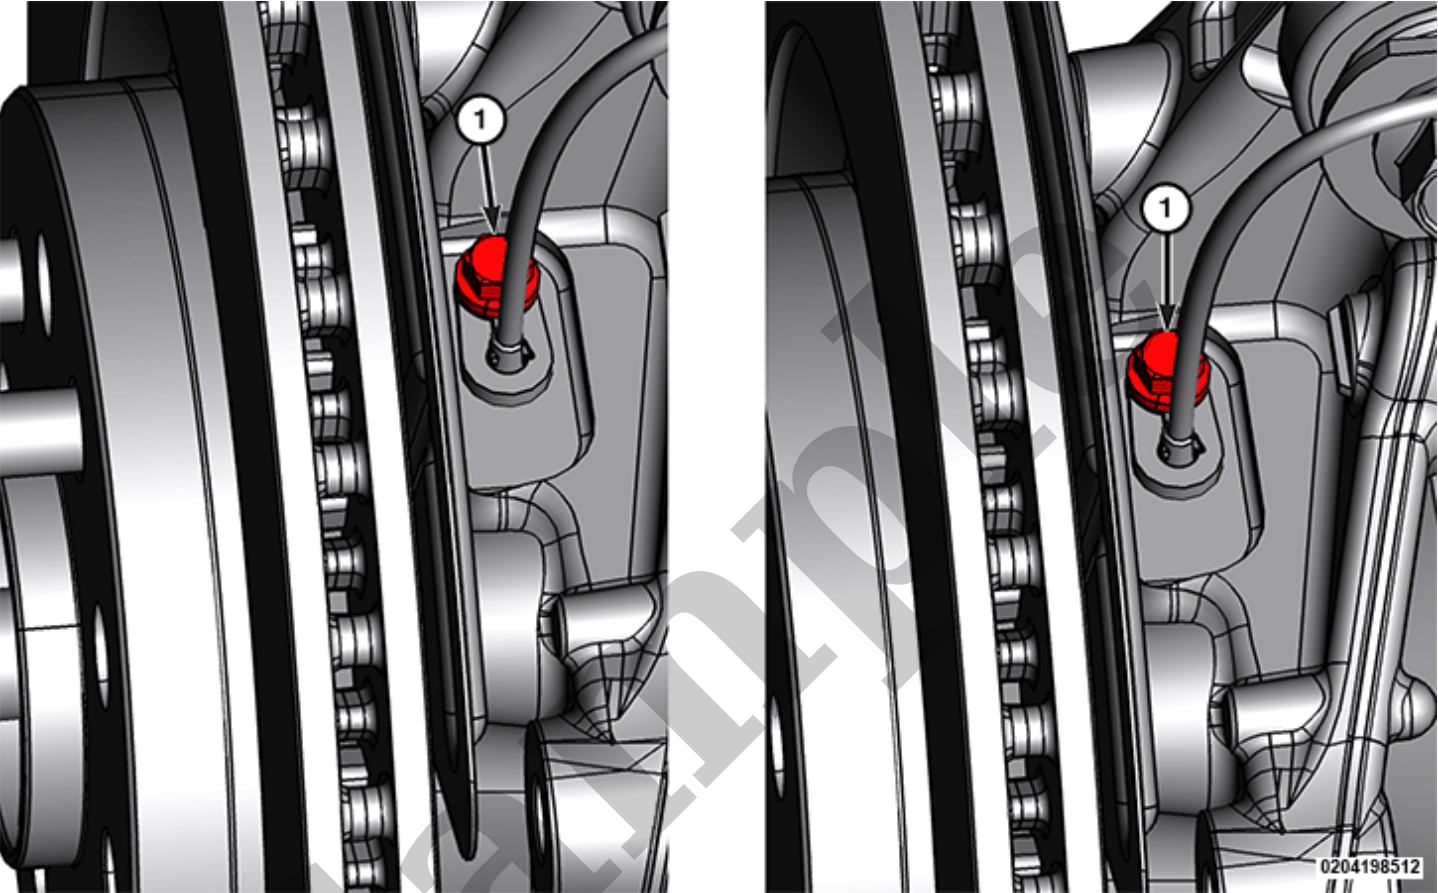


CALLOUT	DESCRIPTION	SPECIFICATION	COMMENT
1	Wheel Speed Sensor Bolt	6 N·m (53 In. Lbs.)	—

TORQUE SPECIFICATIONS - BRAKE LINES AND BRACKETS

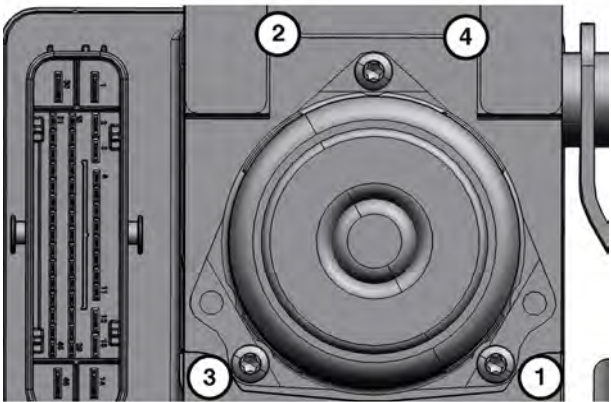

0204190554

Do not reuse these fasteners. If removed, a new fastener must be installed and tightened to specifications.

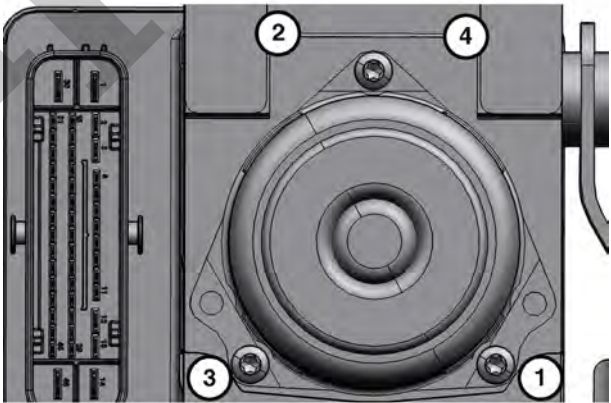

0204190554

1

Brake System Control
Module (BSCM) Bolts
(Second Stage)

**3.5 N·m (31 In.
Lbs.)**

TORQUE SPECIFICATIONS - HYDRAULIC CONTROL UNIT (HCU)

1 - Bluetooth/Wi-Fi Antenna Fasteners
2 - Wire Harness Connectors
3 - Bluetooth/Wi-Fi Antenna

2. Remove the Bluetooth/Wi-Fi antenna fasteners.

3. Remove the wire harness connectors from the Bluetooth/Wi-Fi antenna, and remove the Bluetooth/Wi-Fi antenna from the vehicle.

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

- Tighten the fasteners securely.

Refer To List:

List 1

- [23 - Body / Interior / CONSOLE, Floor / Removal and Installation](#)
- [23 - Body / Interior / CONSOLE, Floor, End Cap / Removal and Installation](#)
- [23 - Body / Interior / CONSOLE, Floor, Lid / Removal and Installation](#)
- [23 - Body / Interior / CONSOLE, Floor, Side Panel / Removal and Installation](#)