

Your Ultimate Source for OEM Repair Manuals


FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

2004 CHEVROLET S-10 Crew Cab OEM Service and Repair Workshop Manual

Go to manual page

Callout	Component Nam		
	Tighten		
	30 N·m (22 lb ft)		
8	Engine Block Plug		

Crankshaft Position Sensor, Engine Block Plug, Knock Sensor, and Piston Oil Nozzle Installation

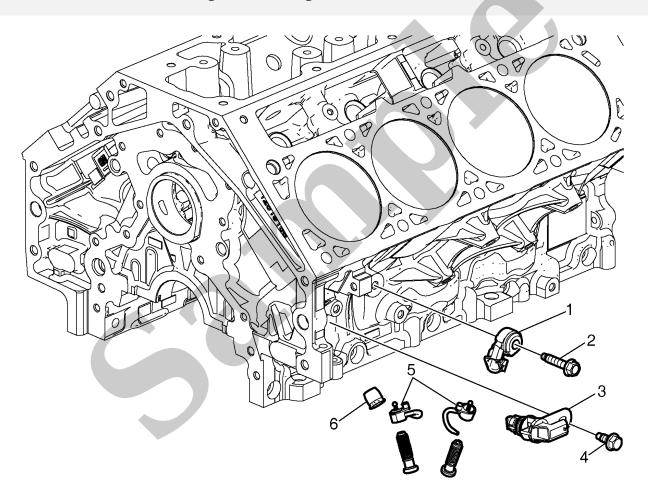

Crankshaft Position Sensor, Engine Block Plug, Knock Sensor, and Piston Oil Nozzle Installation


Callout	Component Name	
1	Knock Sensor Assembly	
2	Knock Sensor Bolt	

YOUR CURRENT VEHICLE

Engine Block Plug Removal

Engine Block Plug Removal


Knock Sensor Shield, Knock Sensor, and Engine Block Oil Gallery Plug Removal

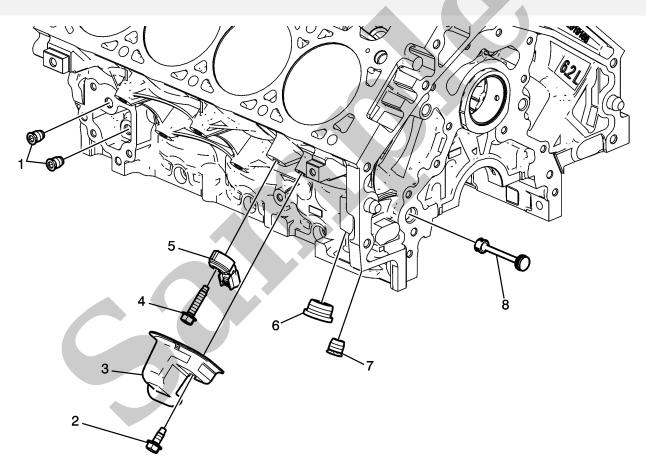

Knock Sensor Shield, Knock Sensor, and Engine Block Oil Gallery Plug Removal

Callout	Component Name	
1	Engine Block Oil Gallery Plug	
2	2 Knock Sensor Shield Bolt	

Callout	Component Name	
1	Knock Sensor Bolt	
2	Knock Sensor Assembly	
3	Crankshaft Position Sensor Bolt	
4	Crankshaft Position Sensor	
5	Piston Oil Nozzle Assembly	
6	Engine Block Plug	

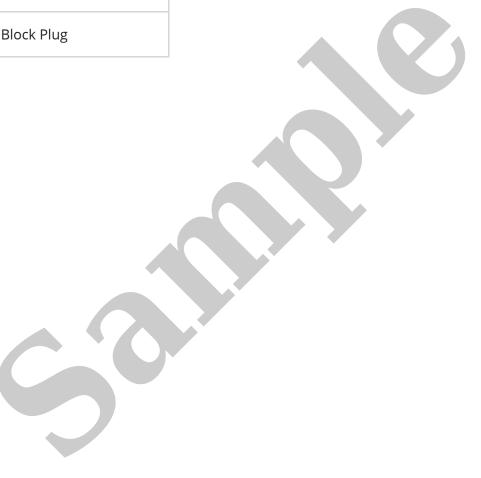

Callout	Component Name	
	Refer to Fastener Caution.	
	Tighten	
	20 N·m (15 lb ft)	
	Water Pump Assembly Gasket	
2	NOTE	ΔQ_1
2	Note	
	Install a NEW Gasket.	
3	Water Pump Assembly	
4	Water Pump Assembly Bolts Tighten 10 N·m (88 lb in)	
	Water Pump Outlet Gasket NOTE	
5	Note Install a NEW Gasket.	
6	Water Pump Outlet Assembly (with Thermostat)	
7	Water Pump Outlet Bolts Procedure	
	1. Install and hand tighten all three bolts.	