

Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

2006 CHEVROLET Tahoe OEM Service and Repair Workshop Manual


[Go to manual page](#)

NOTE

Note

Ensure all retaining clips are installed into the headliner molding and the folding top cover molding.

Install the molding (1) of the folding top cover (2) to the molding (1) of the headliner (3) around the back glass (4) of the folding top cover.

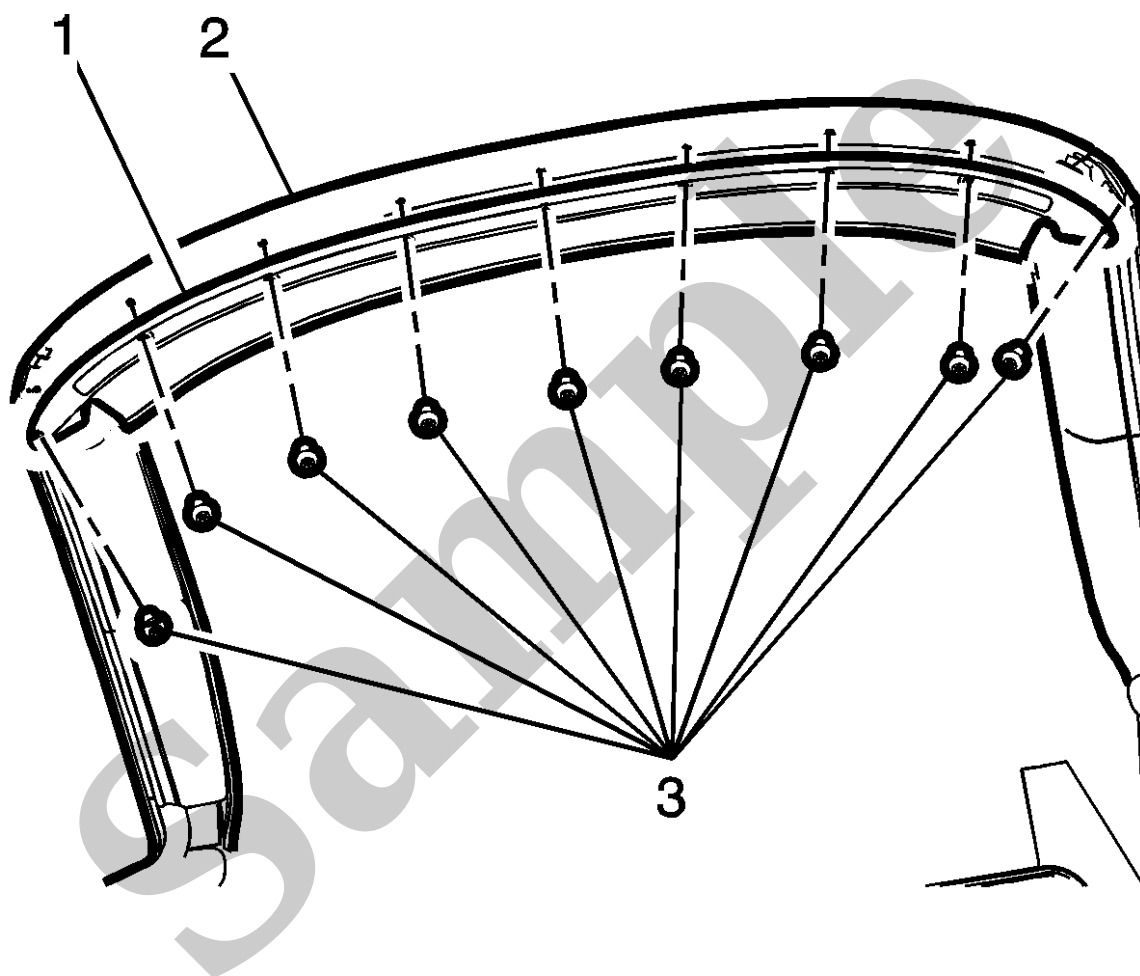

11.


Install the folding top compression seal panel (1) to the number 1 bow (2).

12. Install the folding top compression seal panel screws (3) to the folding top compression seal panel (1) and tighten to **5 N·m (44 lb in)**.

YOUR CURRENT VEHICLE

Folding Top Cover Side Tension Cable Replacement

Folding Top Cover Side Tension Cable Replacement

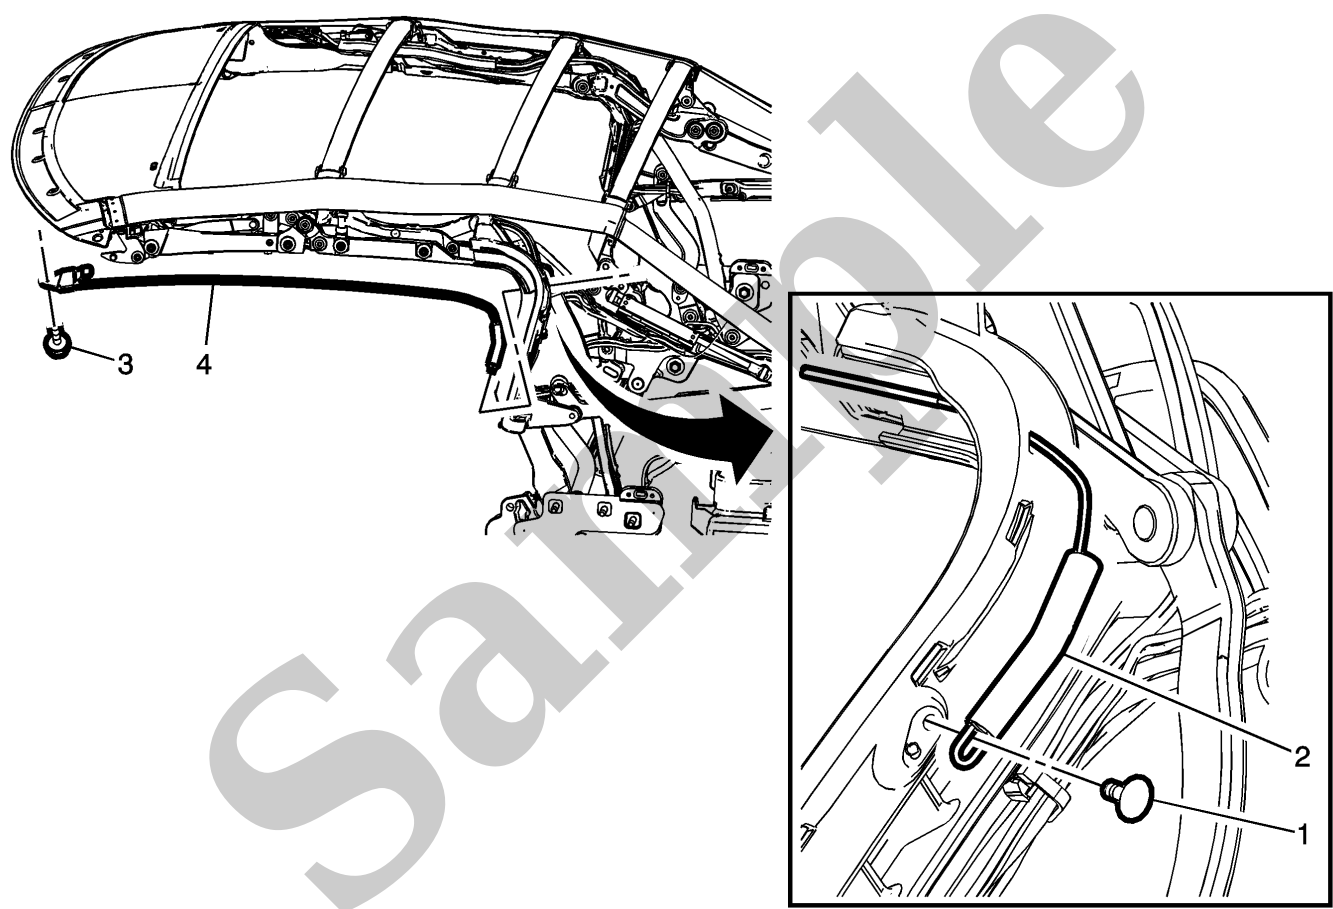


Folding Top Cover Side Tension Cable Replacement

Callout	Component Name
Preliminary Procedures	
1.	Position the folding top into mid position.
2.	NOTE

YOUR CURRENT VEHICLE

Folding Top Cylinder Hydraulic Hose Replacement

Folding Top Cylinder Hydraulic Hose Replacement

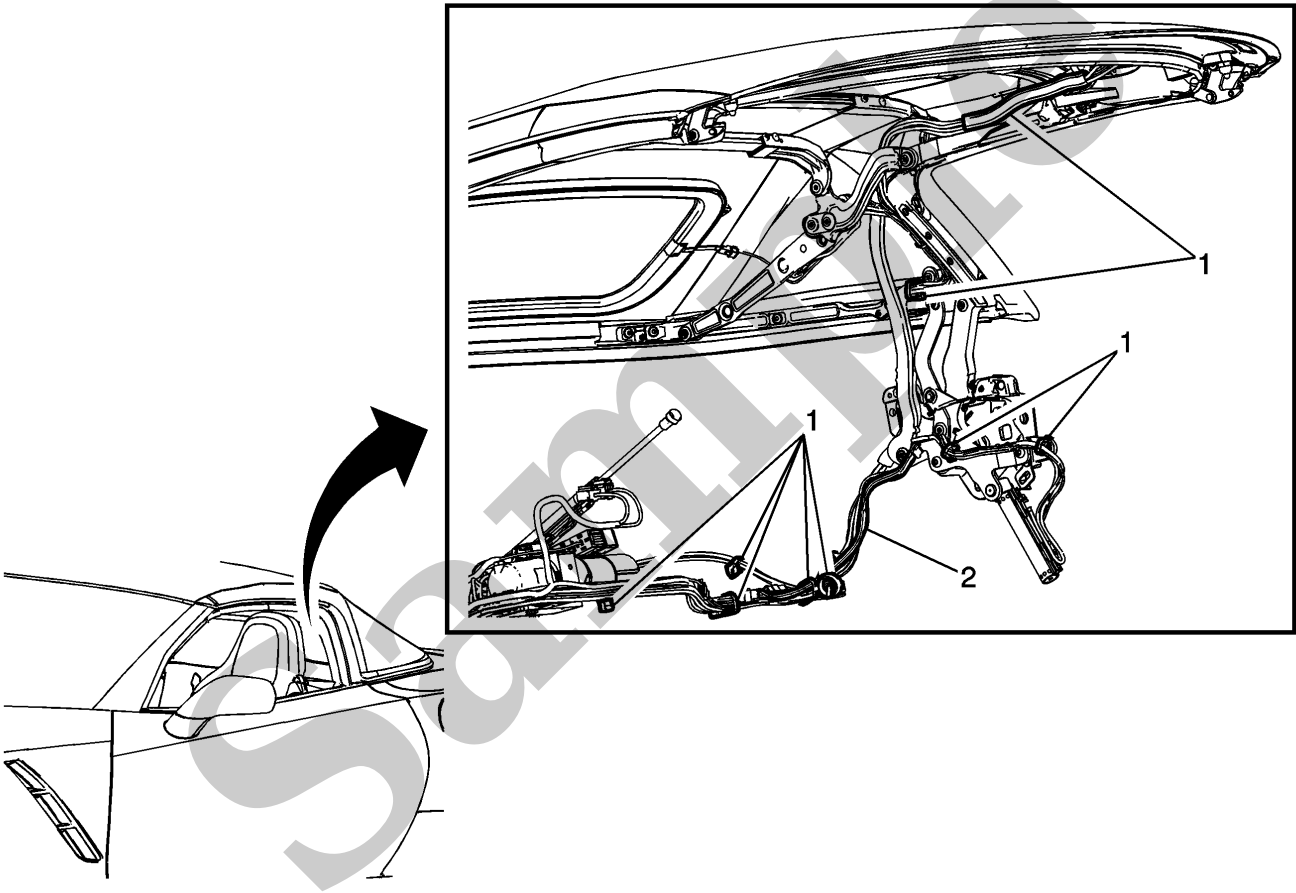

Folding Top Cylinder Hydraulic Hose Replacement

Callout	Component Name
WARNING	
Warning Refer to Eye Protection Warning .	

Callout	Component Name
	<ol style="list-style-type: none">Place all the windows in the full down position.Open the rear compartment lid.Disconnect the power to the folding top motor to prevent the folding top operating.Remove the folding top cylinders on the side being serviced. Refer to Folding Top Cylinder Replacement.Remove the hydraulic lines at the folding top pump. Refer to Folding Top Pump Replacement.
1	<p>Folding Top Cylinder Hydraulic Hose Fasteners</p> <p>Procedure</p> <ol style="list-style-type: none">Remove all tie wraps, tape, clips, wire looms and conduit on the hydraulic hoses from the folding top.Install all tie wraps, tape, clips, wire looms and conduit to the folding top in the same location as removed for proper installation.
2	<p>Folding Top Cylinder Hydraulic Hose</p> <p>Procedure</p> <ol style="list-style-type: none"><div>NOTE</div><div><p>Note</p><p>Ensure that all hydraulic hoses being serviced receive new O-rings, because of high pressure.</p><p>Use the BO-47666 installer to install a new O-ring on each er hose.</p></div>Remove the tape from the hoses.Ensure that the hydraulic fluid level is full. Refer to Folding Top Fluid Addition.Connect the power to the folding top motor.Operating and bleeding procedure. Refer to Folding Top Hydraulic System Bleeding.Inspect the folding top for leaks and proper operation. <div>NOTE</div> <div><p>Note</p><ul style="list-style-type: none">Hydraulic cylinder hoses can not be repaired, they MUST be replaced.After the cylinder hose has been opened or removed, DO NOT move the hydraulic cylinder rod, this will prevent the fluid from squirt out of the ports.</div>