


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

2014 Jeep Cherokee Service and Repair Manual

[Go to manual page](#)

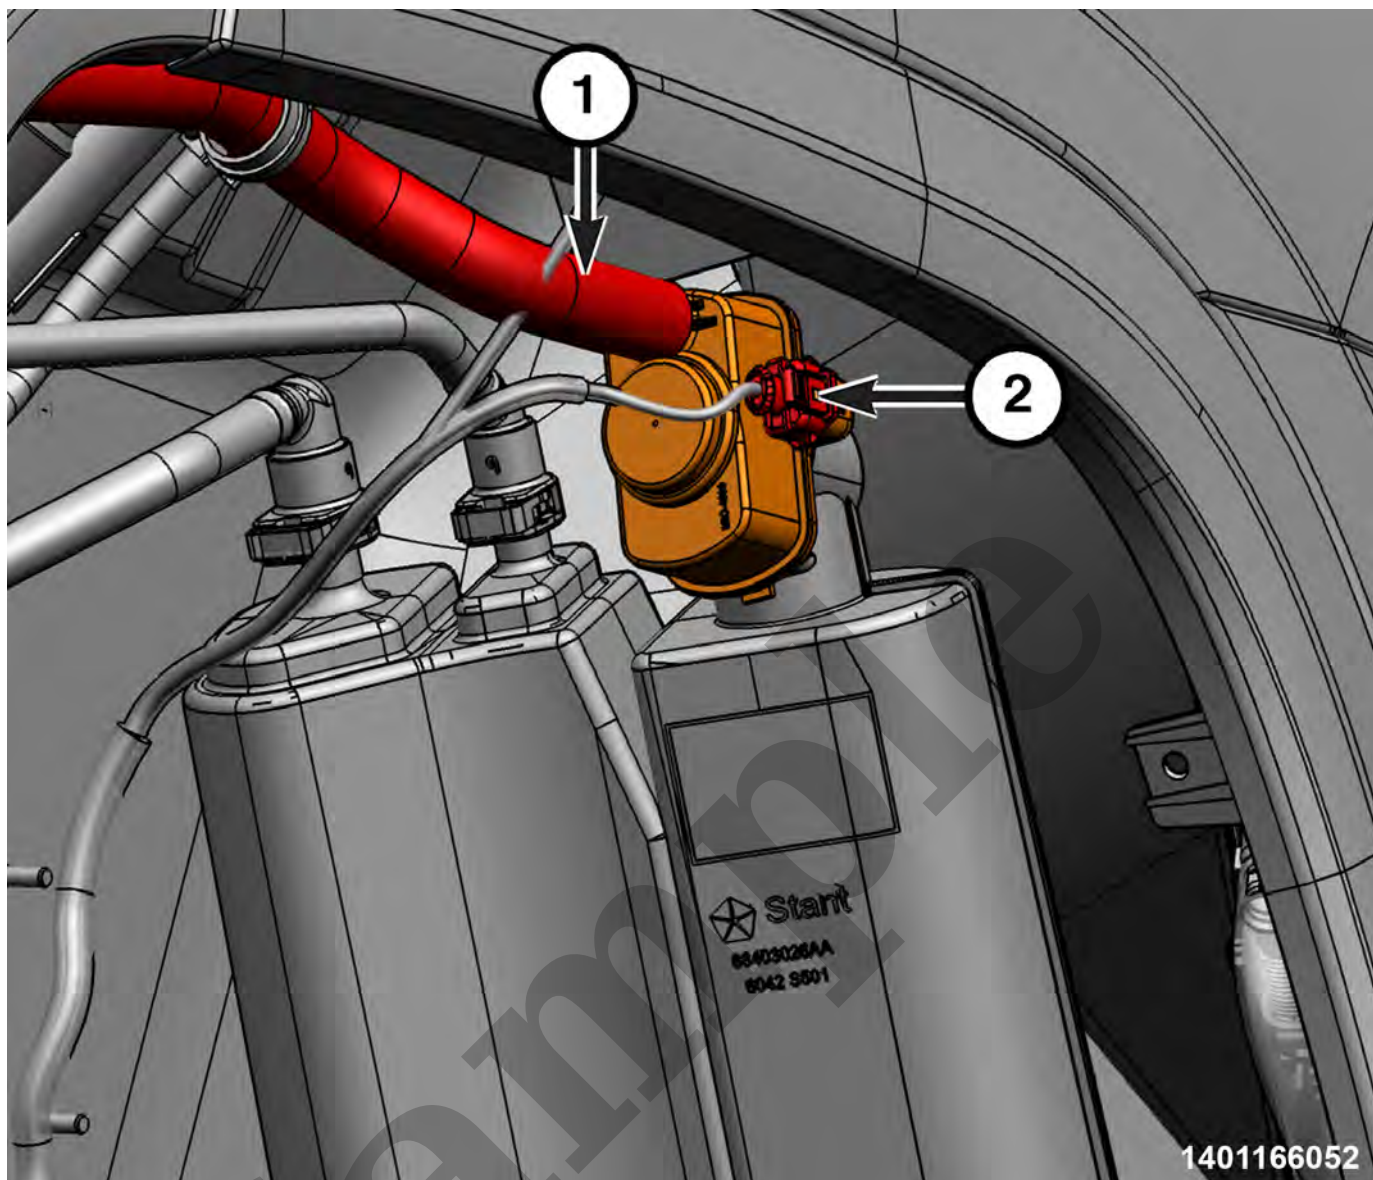

1 - Vapor Canister Filter Hose


2 - ESIM Switch Wire Harness Connector

3. Disconnect the vapor canister filter hose from the ESIM switch.
4. Disconnect the ESIM switch wire harness connector.


Torque Specifications

TORQUE SPECIFICATIONS

TORQUE SPECIFICATIONS - EVAP EMISSIONS

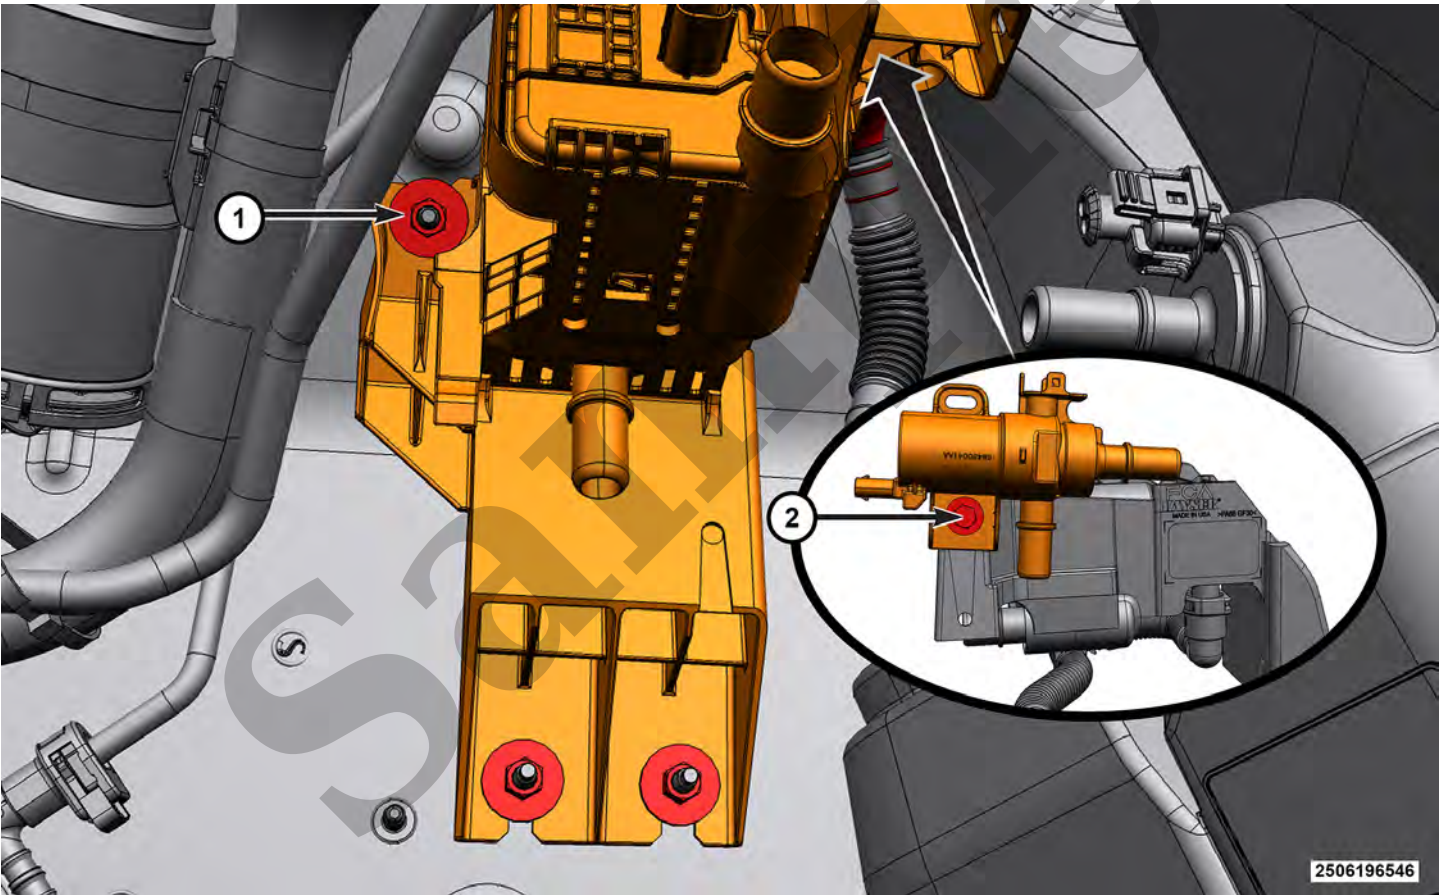

CALLOUT	DESCRIPTION	SPECIFICATION	COMMENTS
1	Electronic Leak Check Module (ELCM) Bracket Nuts	8 N·m (71 In. Lbs.)	-
2	Fuel Tank Isolation Valve to Bracket	7N·m (53 In. Lbs.)	-
-	Crankcase Pressure Sensor Bolt	6 N·m (53 In. Lbs.)	-

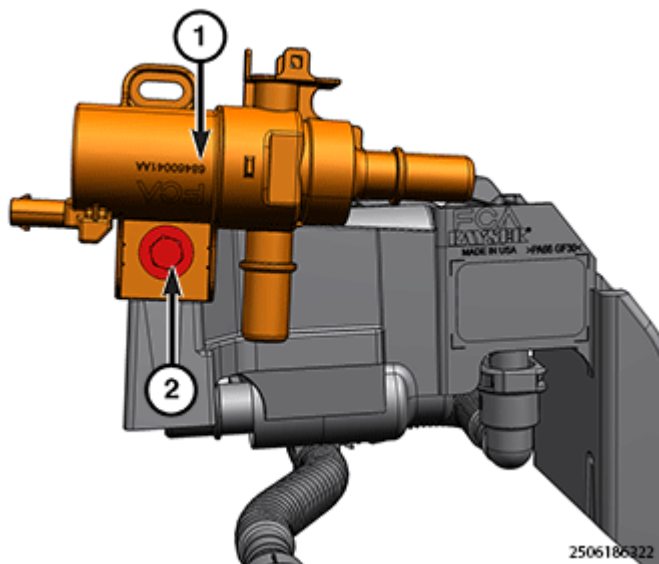

1 - Fuel Tank Isolation Valve (FTIV)

2 - Fuel Tank Isolation Valve Bolt


4. Remove the FTIV bolt from the ELCM bracket and remove the FTIV and hose from the vehicle.

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle.


- Tighten the FTIV bolt securely.
- Using WiTech perform the ELCM Forced Monitor Test once repairs are completed.

EGR response during opening

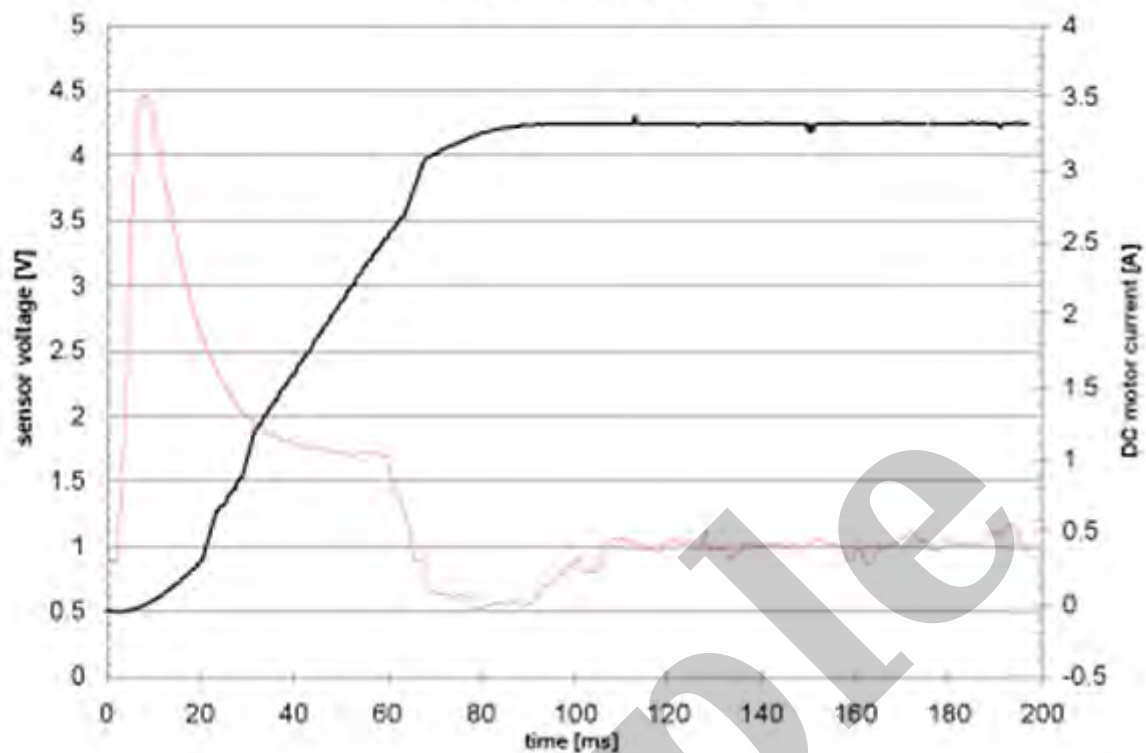

2830092437

EGR response during closing

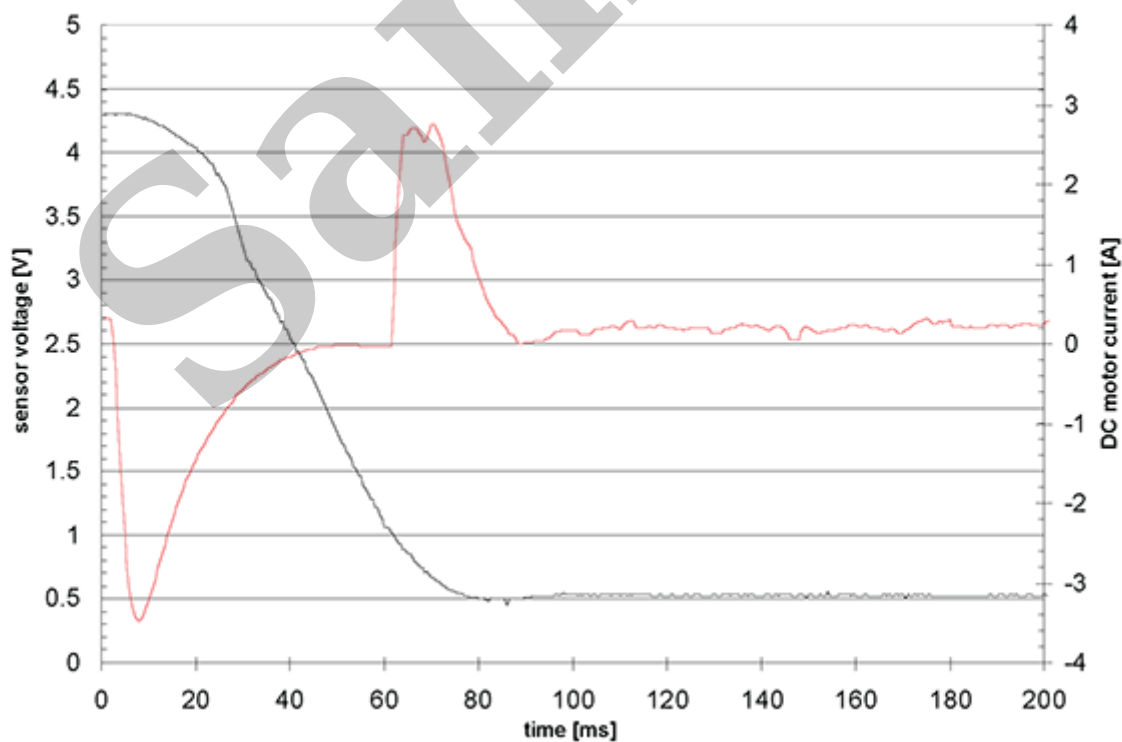








































































2830092438



SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
6	Fuse	16	See Owner's Manual
7	Key Activate (Power Outlet)	17	See Appropriate Service Manual Section
8	Warning	18	Emergency Release Handle
9	Child Seat Tether Anchor	19	Jack/Jack Tools Location
10	Lower Anchors and Tether for Children (LATCH)	20	No Power Washing

INDICATOR SYMBOLS


 1	 2	 3	 4	 5	 6	 7	 8
 9	 10	 11	 12	 13	 14	 15	 16
 17	 18	 19	 20	 21	 22	 23	 24
 25	 26	 27	CRUISE 28	 29	 30	ESP BAS 31	 32
 33	 34	 35	 36	 37	 38	 39	 40
 41	 42	 43	 44	 45	ESP OFF 46	 47	O/D OFF 48
 49	 50	 51	 52	 53	 54	 55	 56
 57	 58	 59	 60	 61	 62	 63	SWAY BAR 64
AWD! 65	4WD! 66	2WD 67	4WD LOW 68	4WD LOCK 69	4WD AUTO 70	FRONT 71	REAR 72
 73	 74	 75	 76	AXLE LOCK 77	 78	ESC OFF 79	 80
 81	 82	 83	 84	 85	 86		

0004119165

YOUR CURRENT VEHICLE

Description

DESCRIPTION

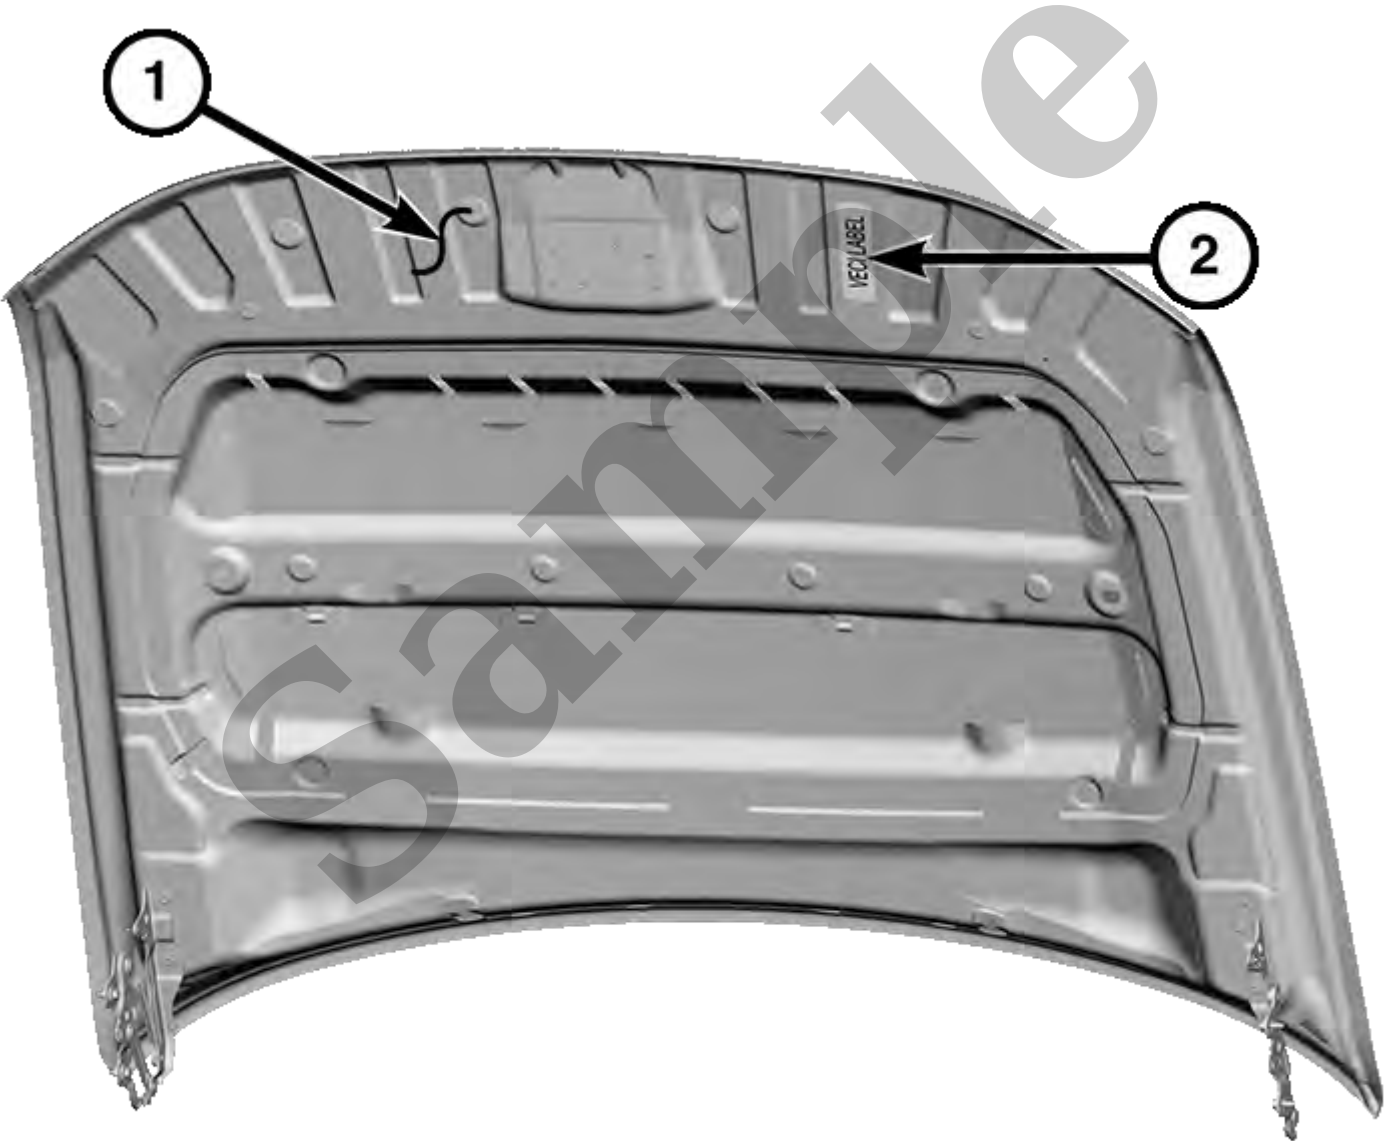


0007183455

1 - Hood

YOUR CURRENT VEHICLE

Description

DESCRIPTION

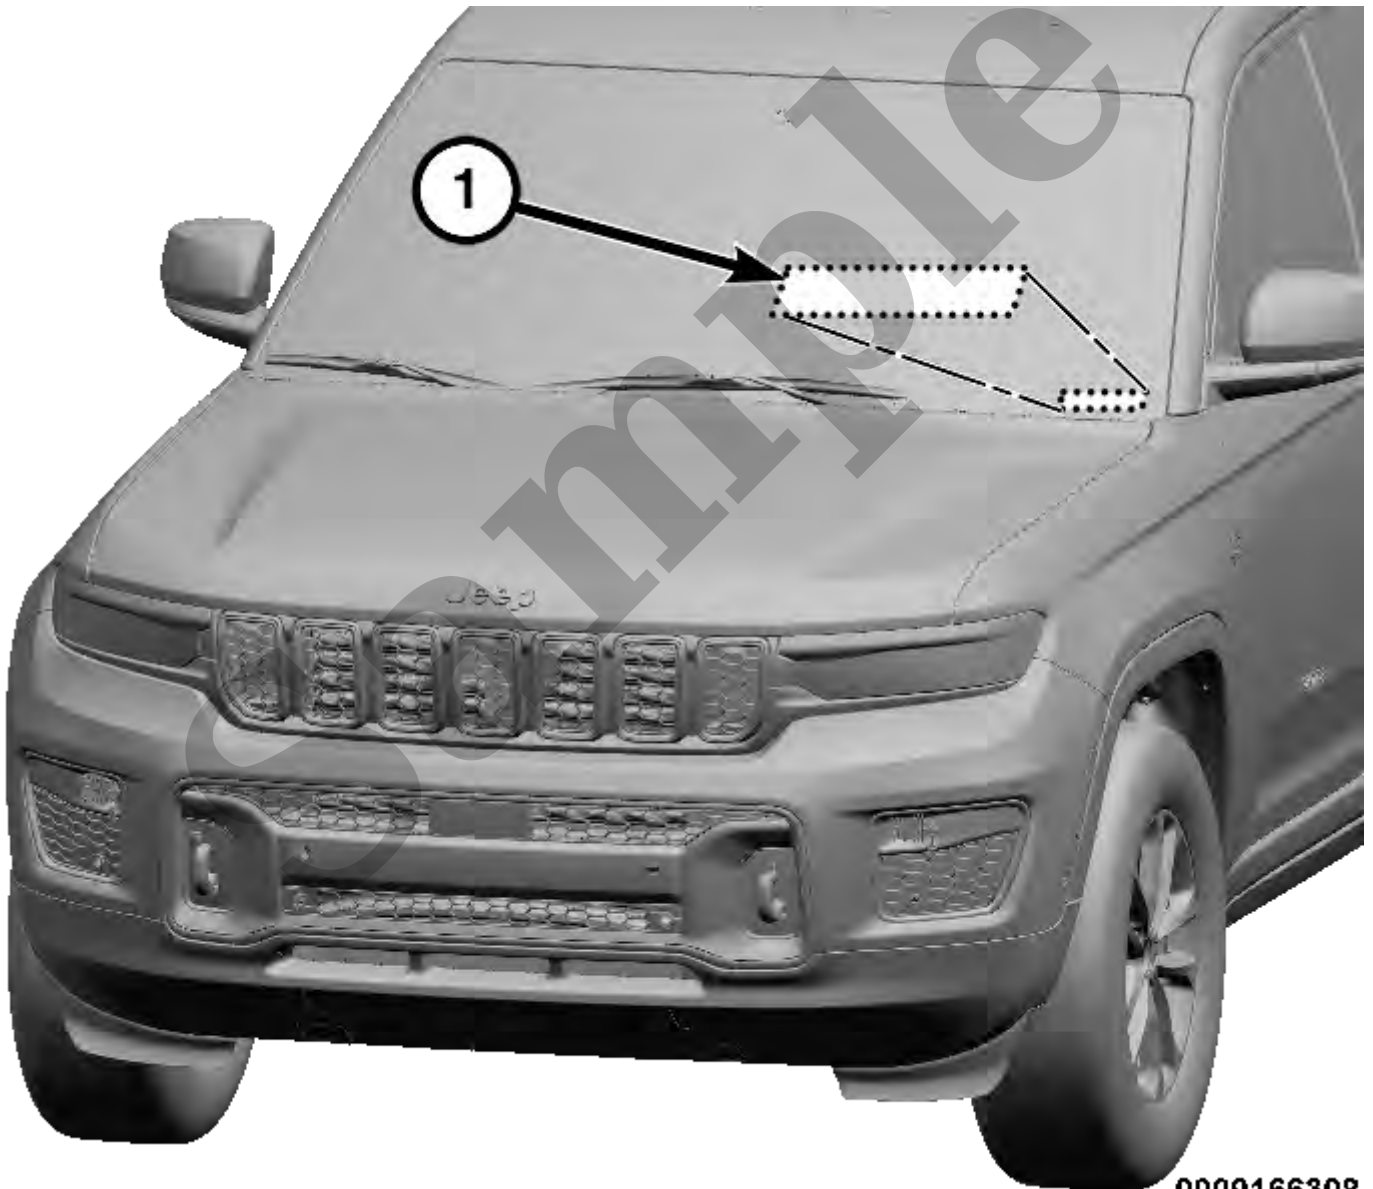

0009166308

1 - Vehicle Identification Number Label