

Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

2018 MAZDA CX-3 OEM Service and Repair Workshop Manual

[Go to manual page](#)


SIDE STEP MOLDING REMOVAL/INSTALLATION

SM2899438


id09160080180

1.Remove the front over fender lower. (See [FRONT OVER FENDER REMOVAL/INSTALLATION.](#))


2.Remove the screw and washer.

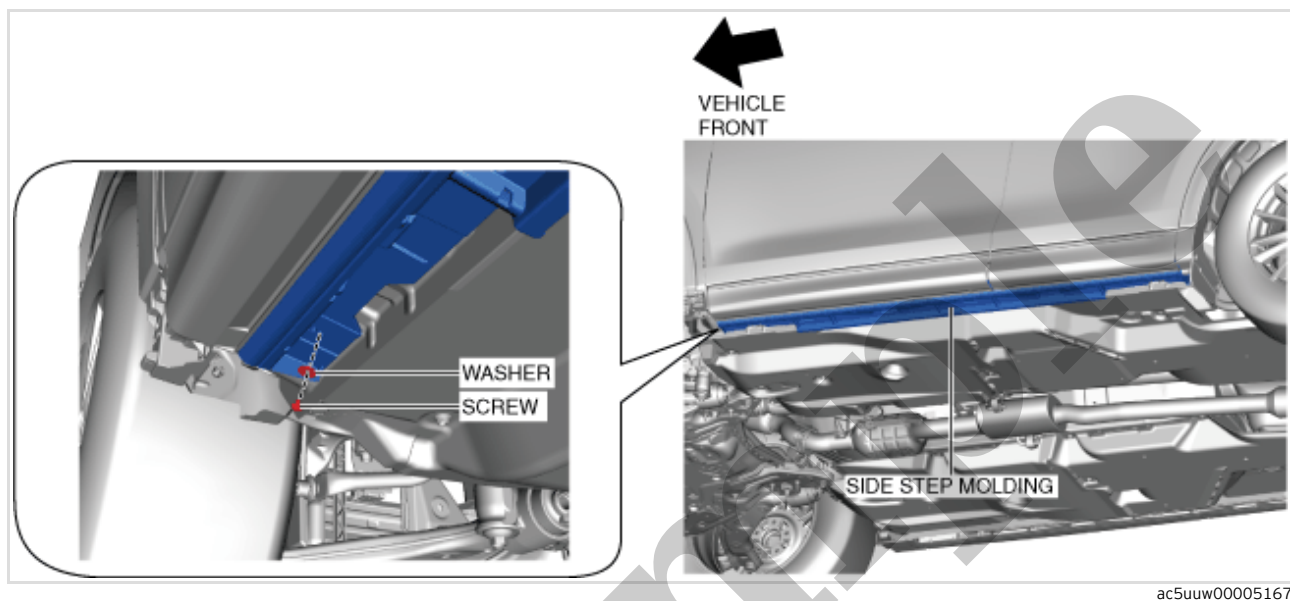

3.Disengage the tabs.

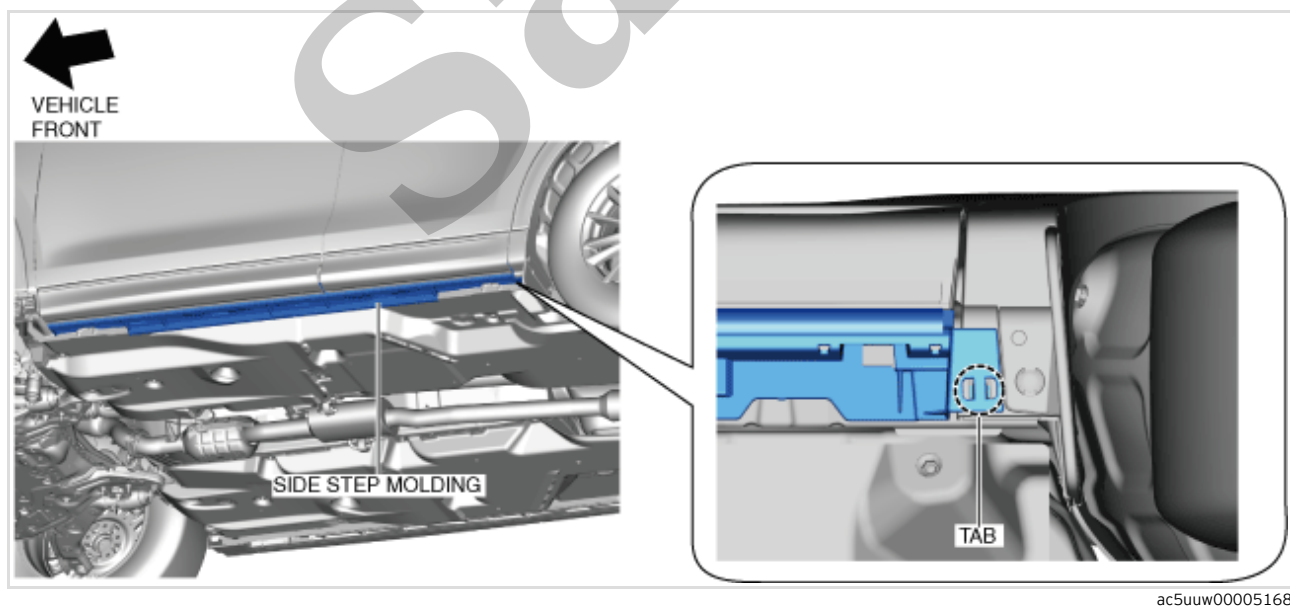

4.Move the side step molding in the direction of the arrow shown in the figure and remove it.


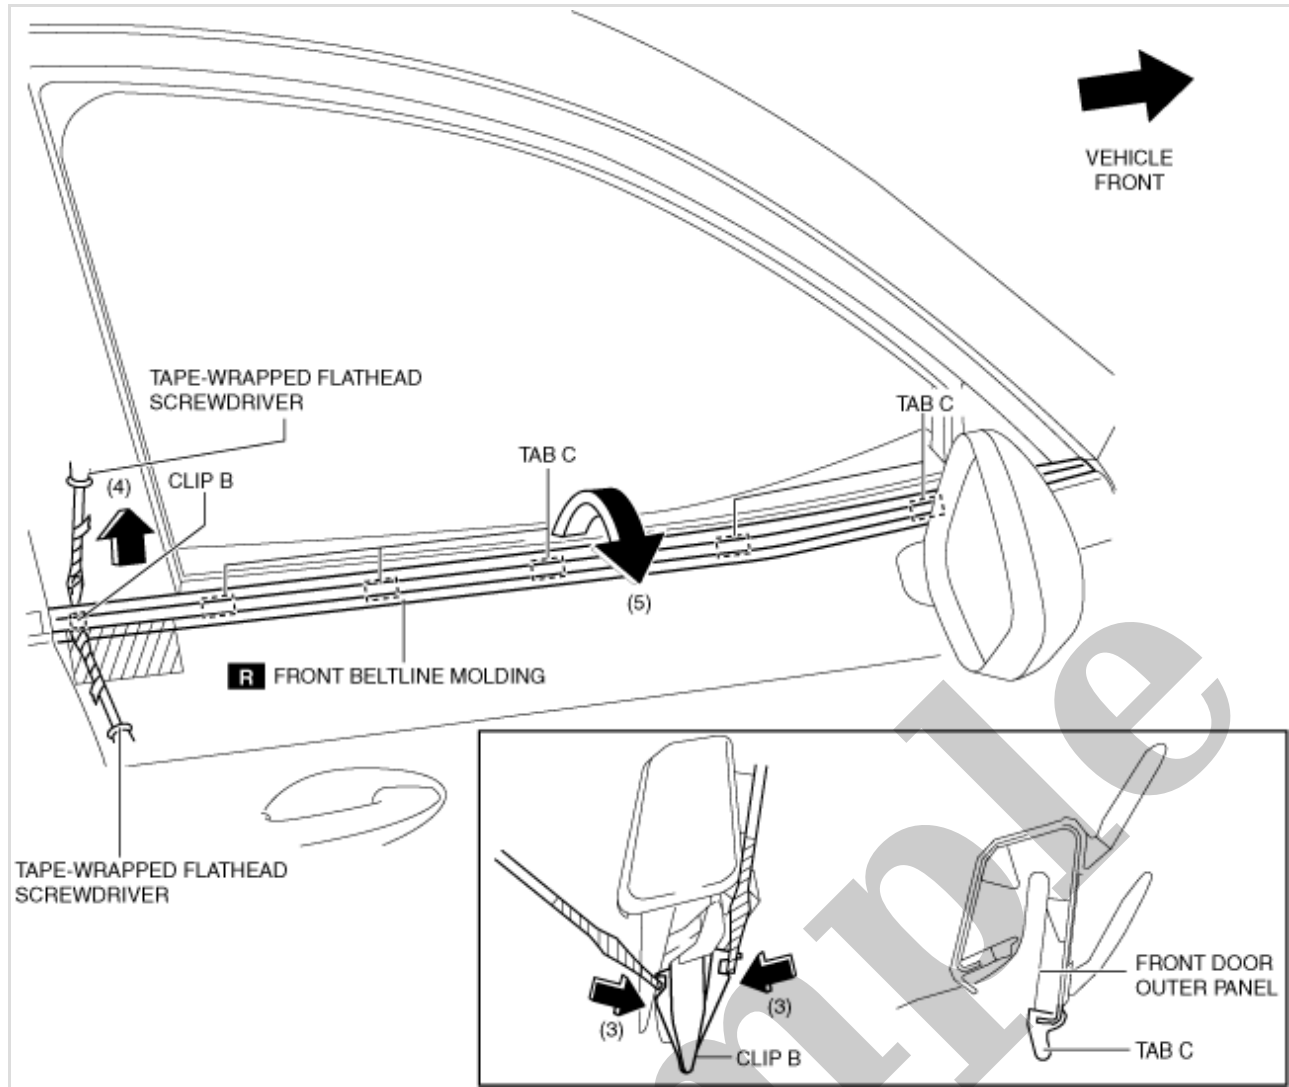


6. Pull up the rear side of front beltline molding in the direction of arrow (4) shown in the figure.

7. Rotate the front beltline molding in the direction of arrow (5) shown in the figure and remove it while detaching tabs C.

8. Install in the reverse order of removal.

←
VEHICLE
FRONT

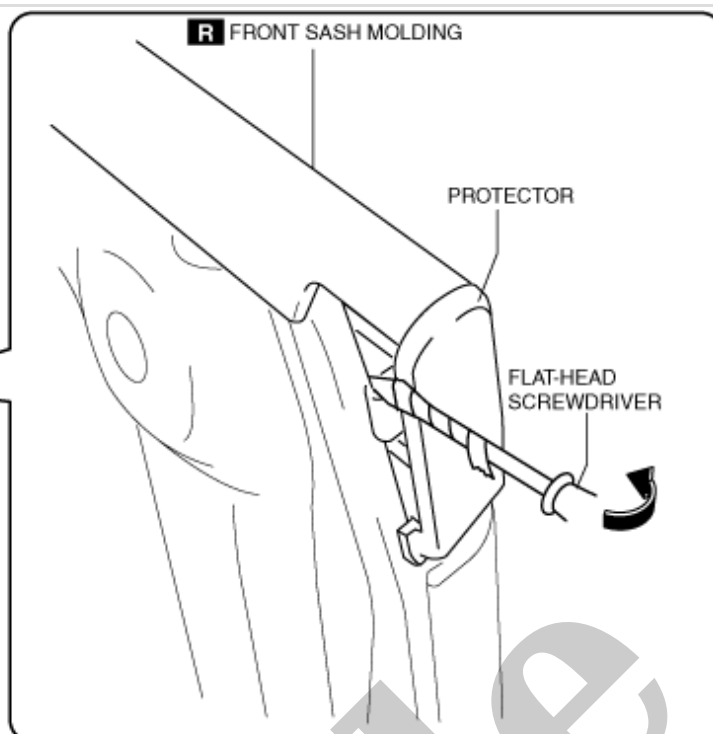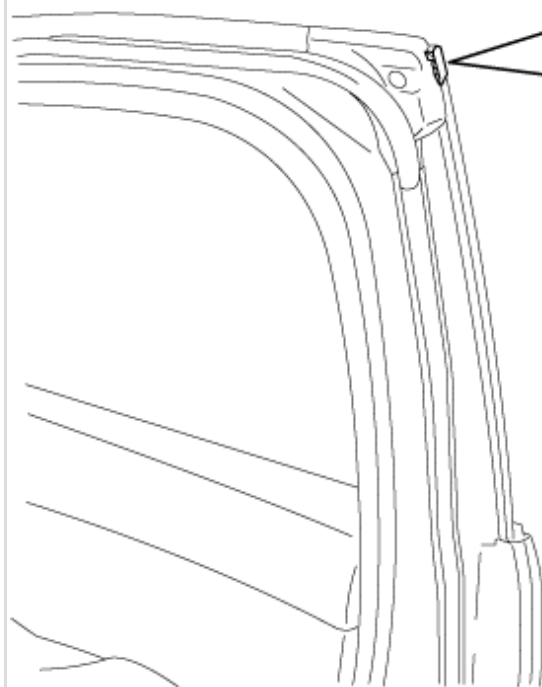

ac5uuw00007384

5. Insert a tape-wrapped flathead screwdriver shown in the figure and remove the clip in the direction of arrow (1).

DOOR SASH FILM REMOVAL

SM2899443

id09160080520

Front Door Sash Film


Replace parts

Front door sash film


Number of parts: 2

Used place: Front door sash film

1. Perform the front door glass preparation. (See [FRONT DOOR GLASS REMOVAL/INSTALLATION.](#))
2. Disconnect the negative battery terminal. (See [NEGATIVE BATTERY TERMINAL DISCONNECTION/CONNECTION.](#))
3. Remove the following parts:
 - (1) Front door trim (See [FRONT DOOR TRIM REMOVAL/INSTALLATION.](#))
 - (2) Front door speaker (See [FRONT DOOR SPEAKER REMOVAL/INSTALLATION.](#))
 - (3) Front door glass (See [FRONT DOOR GLASS REMOVAL/INSTALLATION.](#))
 - (4) Glass run channel
4. Peel off the front door sash film by pulling it outward from one end.

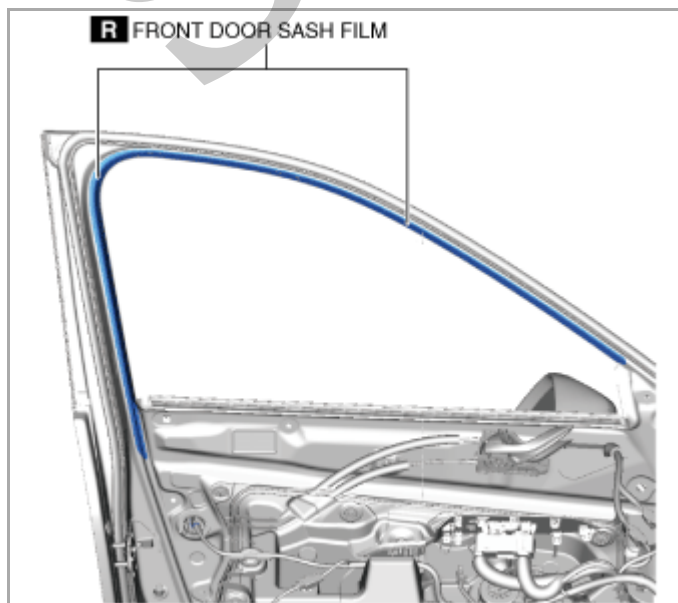

ac5uuw00008358

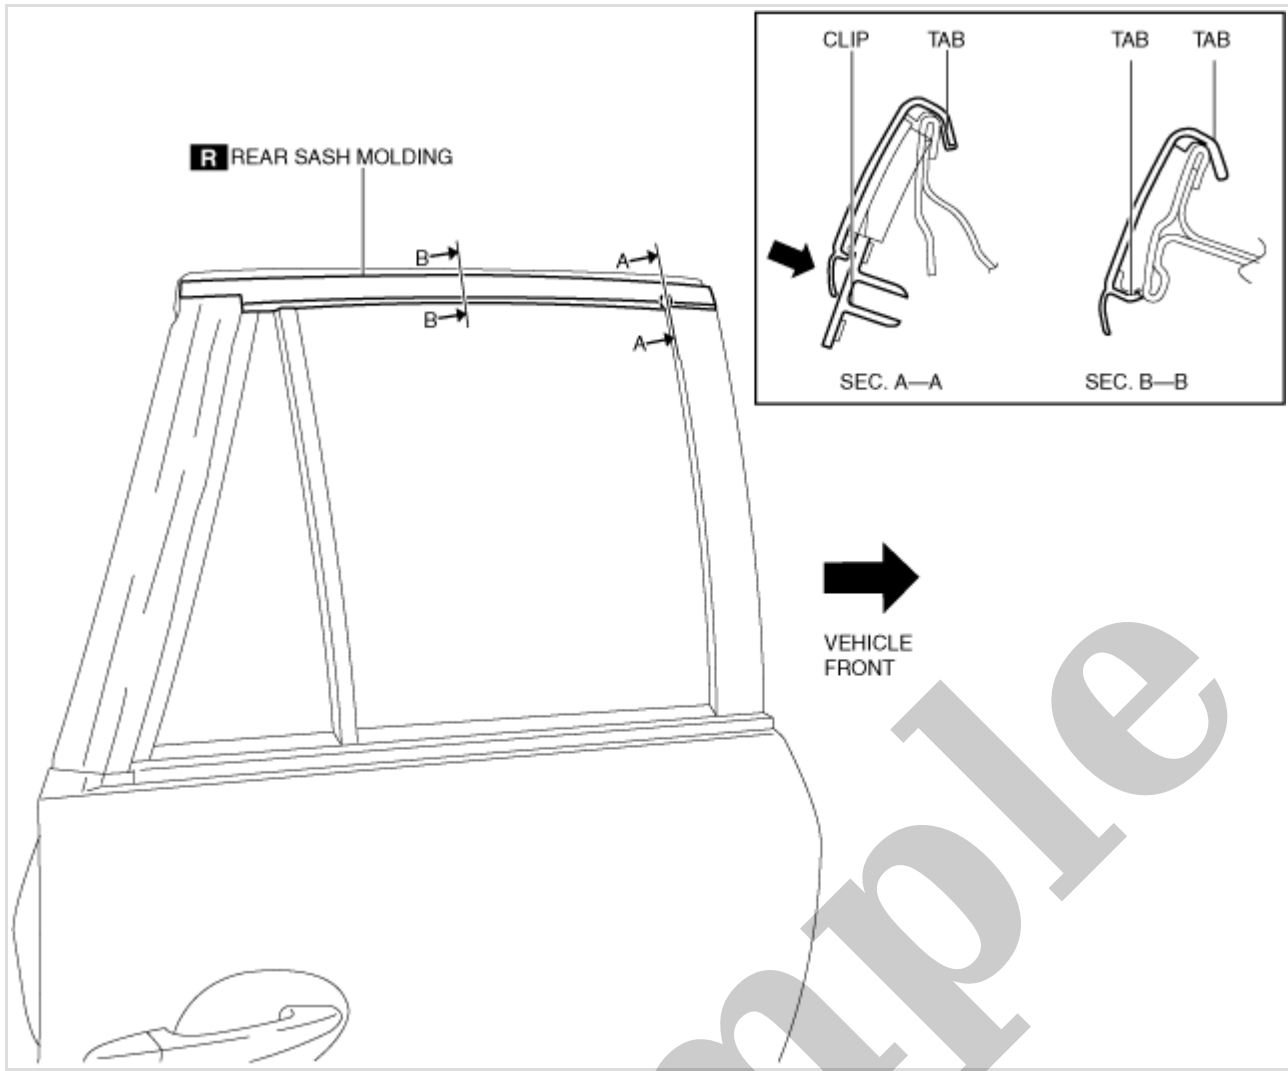

4. Press in the rear sash molding in the direction of the arrow shown in the figure and attach the clip to the rear door.

Caution


- Do not press the rear sash molding in any place other than the rubber areas.

5. Press in the rear sash molding in the direction of the arrow shown in the figure from vehicle front and install the tab to the rear door.

Note


- After installing the rear sash molding, verify that tabs are connected properly to the rear door.

4.Remove the fasteners.

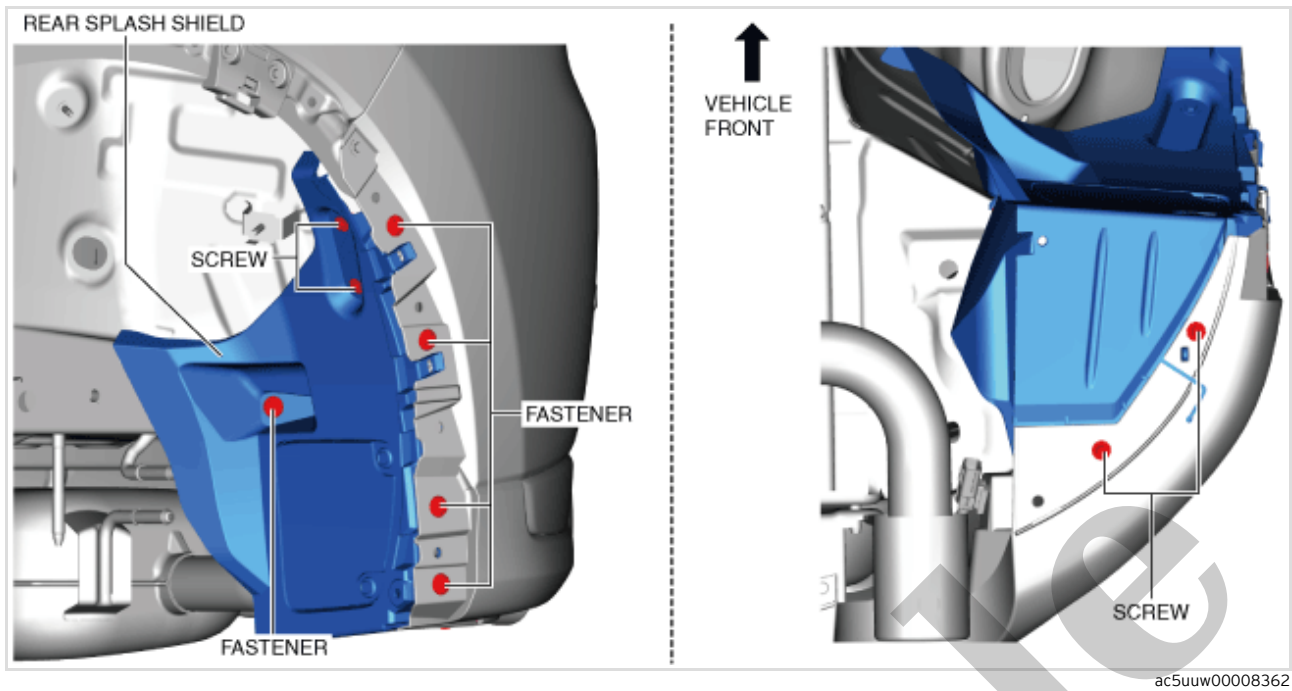


5.Remove the screws.

6.Detach the tabs from the rear bumper and remove the rear splash shield.

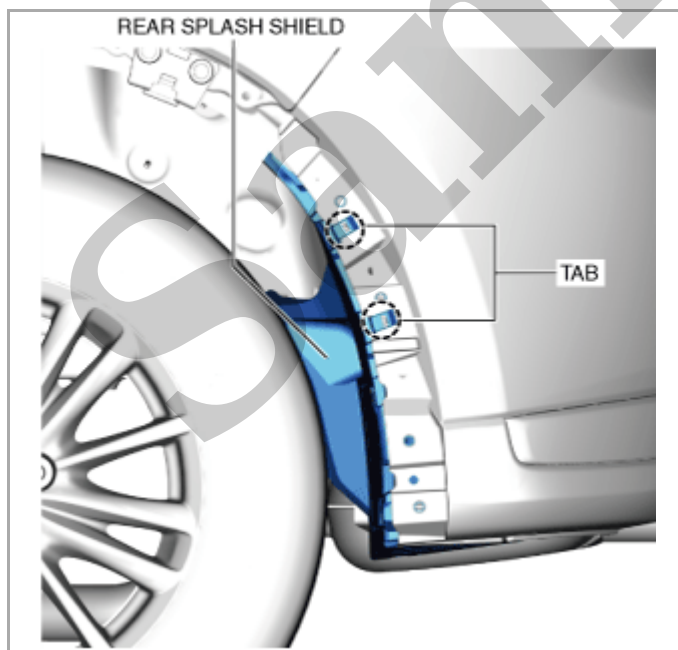

7.Install in the reverse order of removal.

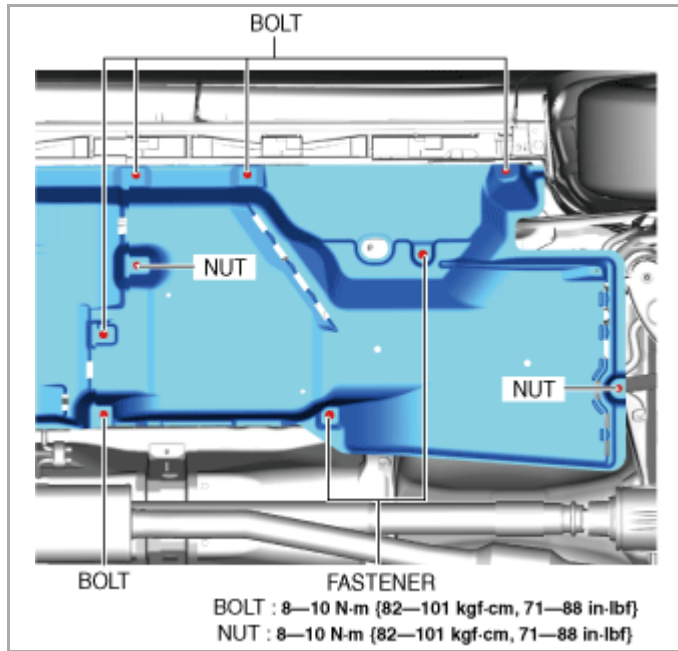

ac5uuw00010067

3.Remove the fasteners.

4.Remove the nuts.


5.Remove the floor under cover No.2 (LH).

6.Install in the reverse order of removal.

Floor under cover No.2 (RH)

1.Lift up the vehicle.


2.Remove the bolts.

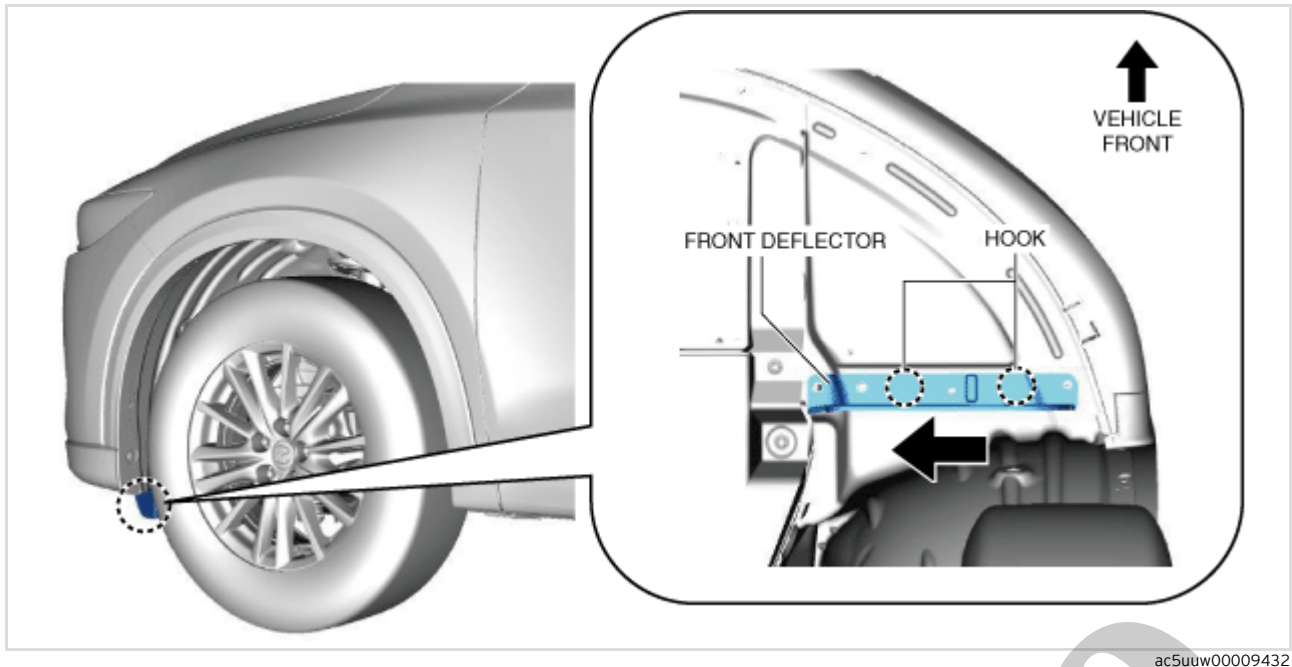


4. Install in the reverse order of removal.

Rear deflector

1. Remove the fasteners.

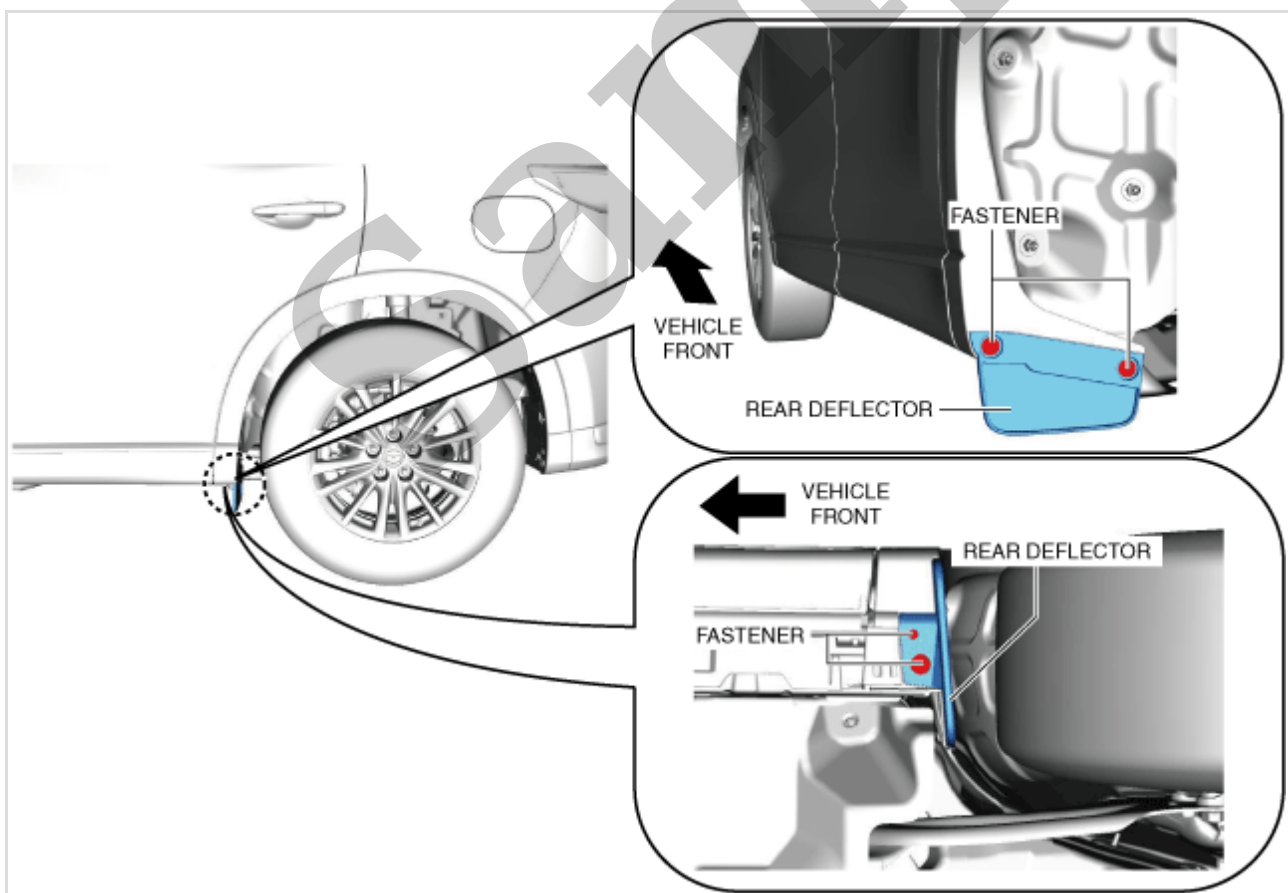

2. Remove the rear deflector.

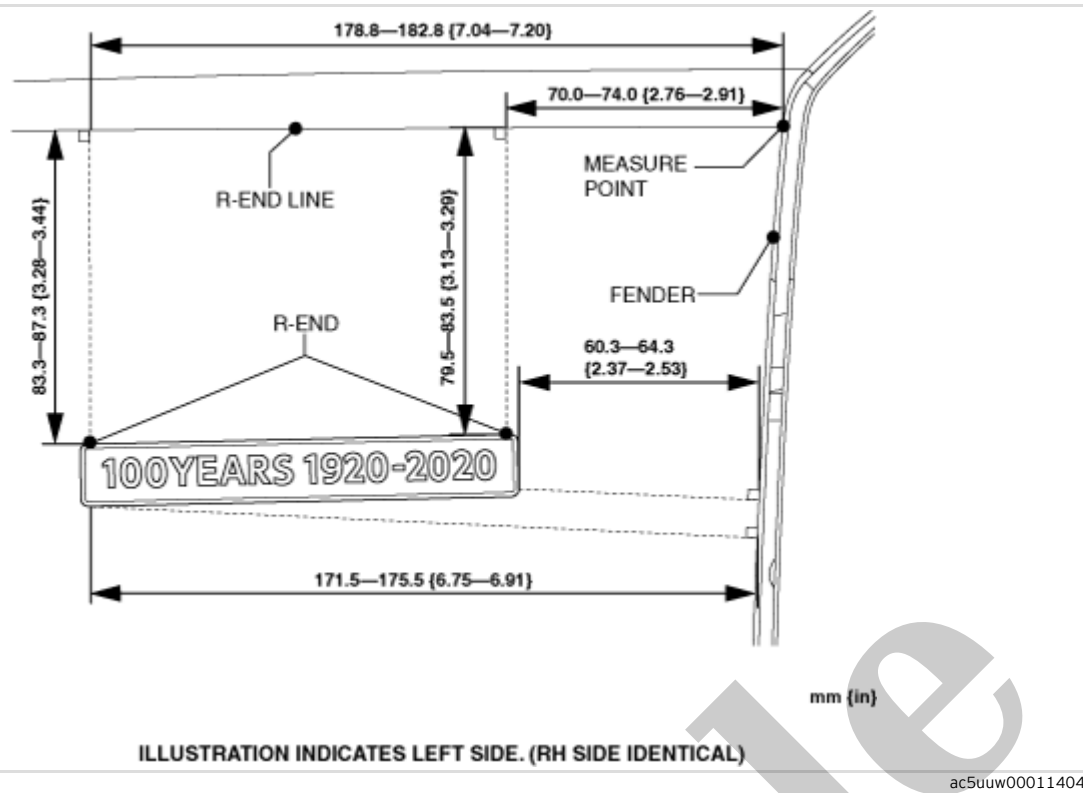

4. Press the ornament with the force of 29.4 N (3.0 kgf, 6.61 lbf) to adhere the double-sided adhesive tape to the ornament installation area.