


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

2022 Jeep Cherokee Service and Repair Manual

[Go to manual page](#)

Connector Views

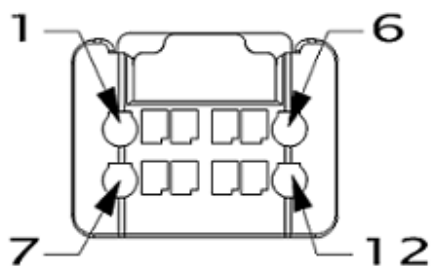

Pin	Circuit	Circuit Function	Color	Gauge/Size	Option
IP					
1	F987	FUSED IGNITION	PK	0.35	
2	A195	FUSED B(+)	RD	0.50	
3	F743	FUSED IGNITION	PK	0.35	
4	C9	RELAY OUTPUT	BU	0.35	
5	N0	NO CONNECT	NA	0	
6	D456	LIN BUS	WH	0.35	
7	N0	NO CONNECT	NA	0	
8	N0	NO CONNECT	NA	0	
9	N0	NO CONNECT	NA	0	
10	Z916	GROUND	BK	0.75	

Pin	Cicuit	Cicuit Function	Color	Gauge/Size	Option
11	N0	NO CONNECT	NA	0	
12	Z914	GROUND	BK	0.50	

Sample

Pin	Cicuit	Cicuit Function	Color	Gauge/Size	Option
17	D295	CAN FD (-)	BG	0.35	
18	D294	CAN FD (+)	BU	0.35	
19	D295	CAN FD (-)	BG	0.35	
20	F987	FUSED IGNITION	PK	0.35	

Sample

Pin	Cicuit	Cicuit Function	Color	Gauge/Size	Option
11	X806	MICROPHONE (+)	GY	0.35	
12	X807	MICROPHONE (-)	GY	0.35	

XY331A

HARNESS_CONNECTOR No:Y331A		Option:Standard
Connector Details		Harness Family
Color	BLACK	
Part Number	7288-6941-30	IP
Repair Kit Part Number	68510230AA	IP
Part Description		IP
Cavity Count	12	IP
Location View	Location View	IP

Connector Views
Mating Side:

YOUR CURRENT VEHICLE


Xy332a

XY332A

HARNESS_CONNECTOR No:X332A		Option:Standard
Connector Details		Harness Family
Color	BLACK	
Part Number	6098-8528	IP
Repair Kit Part Number	TBD 19HD-5	IP
Part Description		IP
Cavity Count	21	IP
Location View	Location View	IP

Pin	Cicuit	Cicuit Function	Color	Gauge/Size	Option
IP					
10A	X792	MICROPHONE (-)	BU	0.35	
11A	Z911	GROUND	BK	1.0	
12A	X722	MICROPHONE (+)	BU	0.35	
13A	X723	MICROPHONE (-)	BU	0.35	
14A	R167	PASSENGER AIRBAG ON LAMP DRIVER	DB	0.35	

Pin	Circuit	Circuit Function	Color	Gauge/Size	Option
HEADLINER					
10A	X792	MICROPHONE (-)	BU	0.35	
11A	Z911	GROUND	BK	1.0	
12A	X722	MICROPHONE (+)	BU	0.35	
13A	X723	MICROPHONE (-)	BU	0.35	
14A	R167	PASSENGER AIRBAG ON LAMP DRIVER	DB	0.35	
15A	R168	PASSENGER AIRBAG OFF LAMP DRIVER	GN	0.35	
16A	A130	FUSED B(+)	VT	2.0	
17A	N0	NO CONNECT	NA	0	
18A	N0	NO CONNECT	NA	0	
19A	N0	NO CONNECT	NA	0	
1A	F987	FUSED IGNITION	PK	0.35	
20A	N0	NO CONNECT	NA	0	
21A	Z915	GROUND	BK	2.0	
2A	M19	LAMP DRIVER	WH	0.35	
3A	N0	NO CONNECT	NA	0	
4A	M5	LAMP DRIVER	WH	0.35	
5A	G38	UGDO CONTROL	GY	0.35	
6A	B222	SPEED SIGNAL 2	DG	0.35	
7A	E12	LAMP DRIVER	OG	0.35	
8A	A971	FUSED B(+)	RD	0.35	
9A	X712	MICROPHONE (+)	DG	0.35	

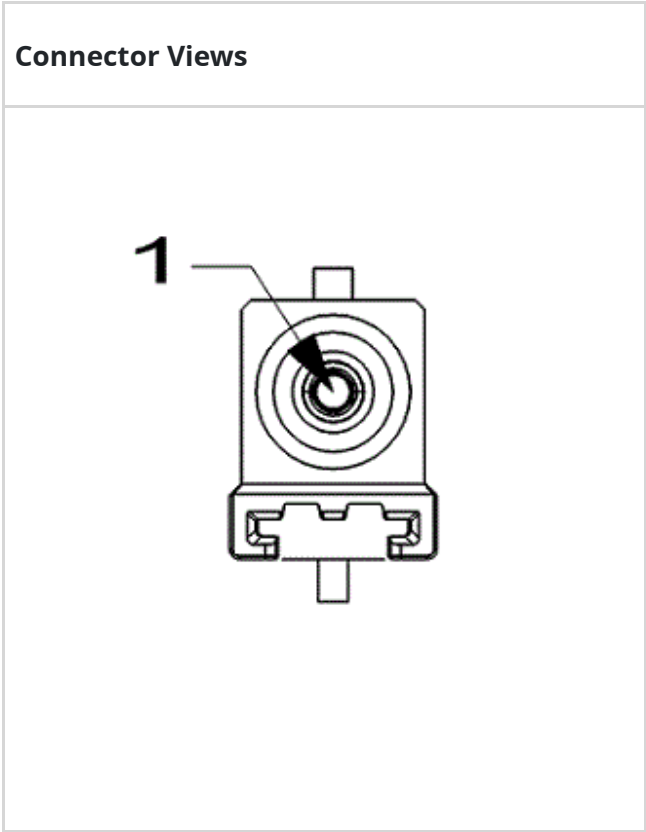

Pin	Cicuit	Cicuit Function	Color	Gauge/Size	Option
JUMPER_TELEMATICS_BOX_MODULE					
1	D944	ANTENNA SIGNAL	BK	0.20	

XY335

HARNESS_CONNECTOR No:Y335D		Option:MEXICO
Connector Details		Harness Family
Color	BROWN	
Part Number	59Z118-C00-F	JUMPER_TELEMATICS_BOX_MODULE
Repair Kit Part Number		JUMPER_TELEMATICS_BOX_MODULE
Part Description		JUMPER_TELEMATICS_BOX_MODULE
Cavity Count	1	JUMPER_TELEMATICS_BOX_MODULE

YOUR CURRENT VEHICLE

Xy350a


XY350A

HARNESS_CONNECTOR No:X350A		Option:Standard
Connector Details		Harness Family
Color	BLACK	
Part Number	6098-8716	IP
Repair Kit Part Number	68496388AA	IP
Part Description		IP
Cavity Count	19	IP
Location View	Location View	IP


Connector Views

Mating Side:

Connector Views

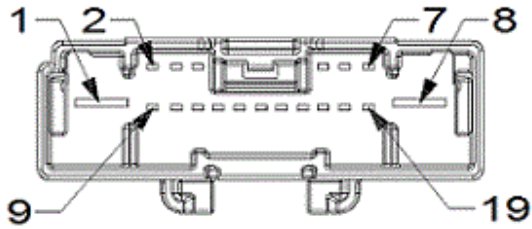

Isometric View:

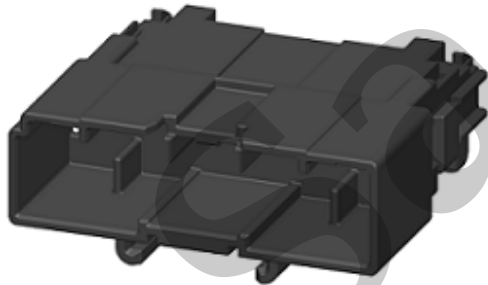

Wire Insertion Side: