


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

1990 JEEP Cherokee OEM Service and Repair Workshop Manual

Go to manual page

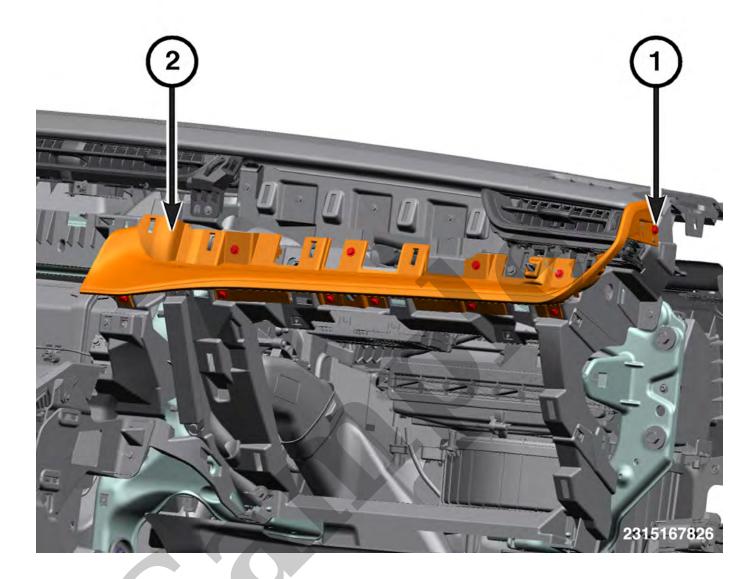

- 1 Fasteners
- 2 Right Applique Trim
- 6. Remove the fasteners from the instrument panel right applique trim. Disconnect wire harness connector and remove from vehicle.

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

• All fasteners are tightened securely.

Refer To List:

- 5. If necessary, remove the Integrated Center Stack (Refer to Electrical/8E Electronic Control Modules/MODULE, Integrated Center Stack Screen/Removal and Installation)(Refer To List 2).
- 6. If necessary, remove the Switch Pod (Refer to 08 Electrical/8J Instrument Cluster/POD, Switch Bank/Removal and Installation).

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

• All fasteners are tightened securely.


Refer To List:

List 1

- 23 Body / Interior / CONSOLE, Floor / Removal and Installation
- 23 Body / Interior / CONSOLE, Floor, End Cap / Removal and Installation
- 23 Body / Interior / CONSOLE, Floor, Lid / Removal and Installation
- 23 Body / Interior / CONSOLE, Floor, Side Panel / Removal and Installation

List 2

- 08 Electrical / 8E Electronic Control Modules / CONTROLS, Rear Cabin Comfort (RCCC) / Removal and Installation
- 08 Electrical / 8E Electronic Control Modules / MODULE, Integrated Center Stack (ICSM) / Removal and Installation

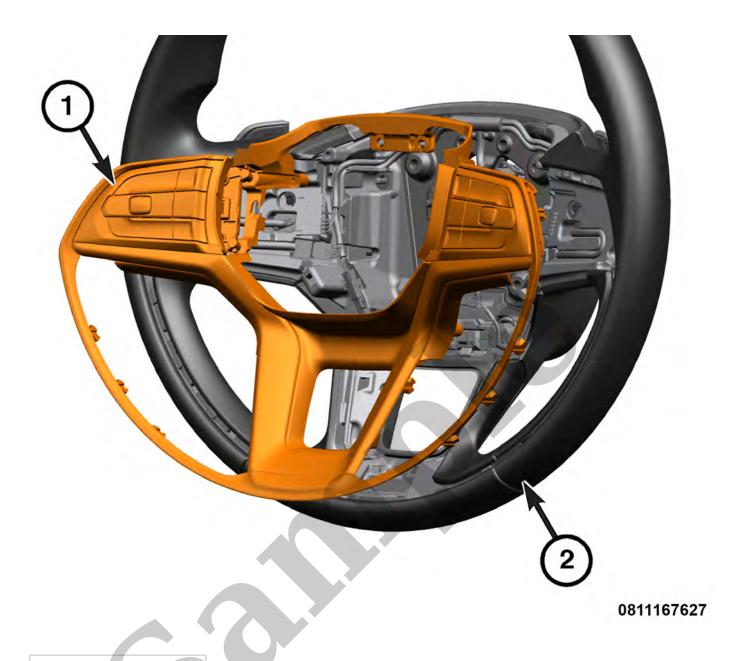

- 1 Steering Wheel Bezel
- 2 Steering Wheel
- 5. Using a trim stick or equivalent, release the steering wheel bezel from the steering wheel.
- 6. Disconnect the wire harness connectors and remove the steering wheel bezel.

INSTALLATION

Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

• All fasteners are tighten securely.

Steering Column Opening Cover

STEERING COLUMN OPENING COVER

REMOVAL

- 1. Remove the left floor console side trim panels (Refer to Body/Interior/CONSOLE, Floor, Side Panel/Removal and Installation) (Refer To List 1).
- 2. Remove the left silencer panel (Refer to Body/Instrument Panel/PANEL, Silencer/Removal and Installation).



Glove Box Lock Cylinder

GLOVE BOX LOCK CYLINDER




YOUR CURRENT VEHICLE

Glove Box Door

GLOVE BOX DOOR



- 1 Fasteners
- 2 Gap Hider
- 2. Remove the fasteners securing the gap hider to the instrument panel.

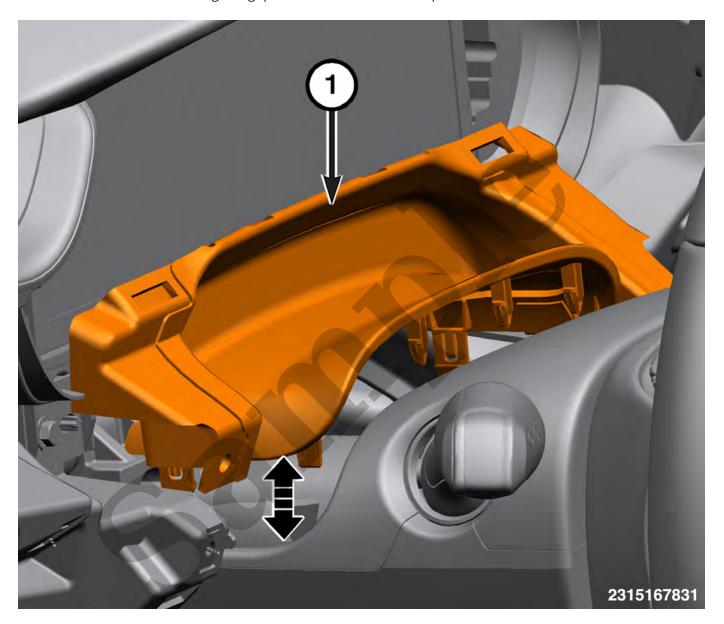

1 - Gap Hider

3. Using a trim stick or equivalent disengage gap hider retaining clips and remove.

INSTALLATION


Follow the removal procedure in reverse for general reassembly of the components on the vehicle. The steps listed below are calling out specific procedures that should be followed during installation.

Refer To List:

List 1

- 23 Body / Interior / CONSOLE, Floor / Removal and Installation
- 23 Body / Interior / CONSOLE, Floor, End Cap / Removal and Installation
- 23 Body / Interior / CONSOLE, Floor, Lid / Removal and Installation
- 23 Body / Interior / CONSOLE, Floor, Side Panel / Removal and Installation



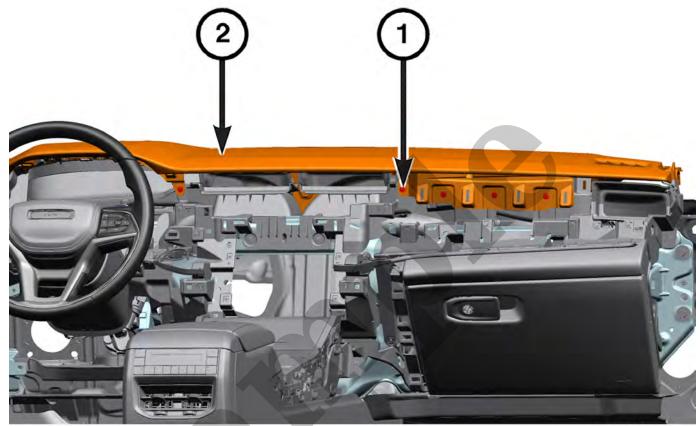

2315167817

- 1 Fasteners
- 2 Instrument Panel Top Pad
- 6. Remove the fasteners from the instrument panel top pad.