


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.


2023 Toyota Tacoma Service Manual

Go to manual page

(1) Unlock and disconnect plug connections (1) from the front console box cover (2).

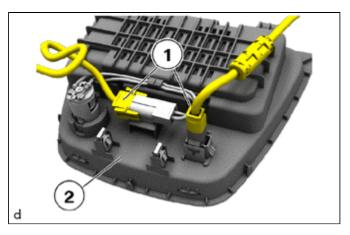

(e) w/ Wireless Charger:

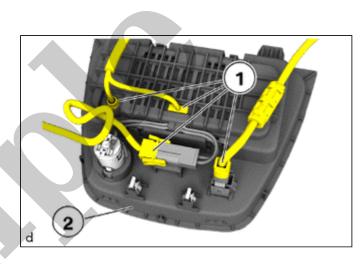


 Unlock and disconnect the plug connection (1) from the front console box cover (2).


(f) Remove the front console box cover.

8. REMOVE UPPER CONSOLE PANEL SUB-ASSEMBLY

(a) Detach the clips (2) of the upper console panel sub-assembly (1).

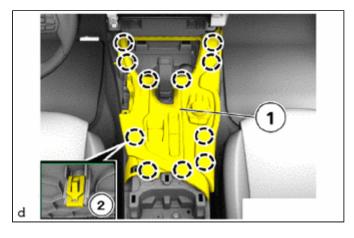


- (b) Lift the upper console panel sub-assembly (1) up slightly.
- (c) Unlock plug connection (1) and disconnect.

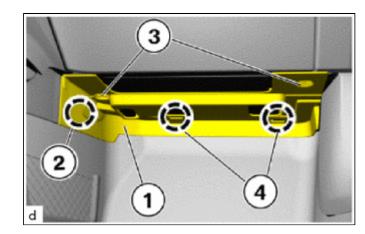


- (b) Detach the guide (2).
- (c) Detach the guides (4) to remove the No. 2 instrument panel under cover sub-assembly (1).
- (d) Unlock plug connections and disconnect.

12. REMOVE CONSOLE BOX ASSEMBLY


(a) Loosen T20 screw (1) on the console box assembly (2) on the left.

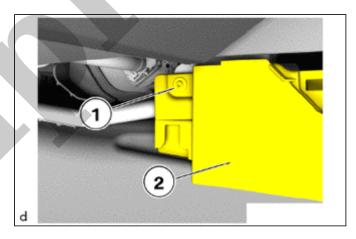

(b) Loosen T20 screw (1) on the console box assembly (2) on the right.

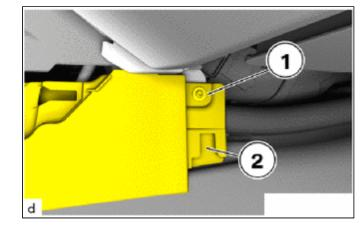

(c) Loosen T20 screws (1) on the console box assembly (2) on the front.

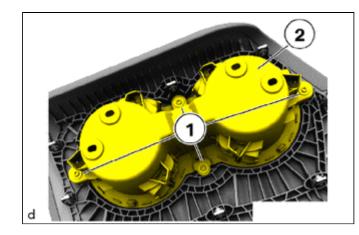


(b) Remove the console box cup holder (2).

14. REMOVE CONSOLE PANEL

HINT:

Perform this procedure only when replacement of the console panel or console panel retainer is necessary.

(a) Loosen T20 screws (1).

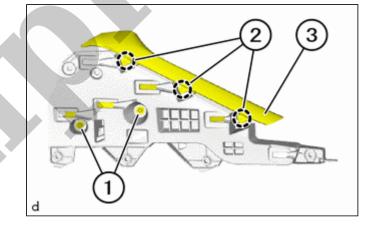

- (b) Detach the clips (2).
- (c) Remove the console panel (3).

15. REMOVE AIR CONDITIONING CONTROL ASSEMBLY

HINT:

Perform this procedure only when replacement of the instrument panel finish lower panel is necessary.

Click here

16. REMOVE BOX BOTTOM MAT (w/o Wireless Charger)

HINT:

Perform this procedure only when replacement of the box bottom mat is necessary.

(a) Remove the box bottom mat.

17. REMOVE MOBILE WIRELESS CHARGER CRADLE ASSEMBLY (w/ Wireless Charger)

HINT:

Perform this procedure only when replacement of the front console box cover is necessary.

Click here




Click here

25. REMOVE FOOTWELL STORAGE NET

HINT:

Perform this procedure only when replacement of the footwell storage net is necessary.

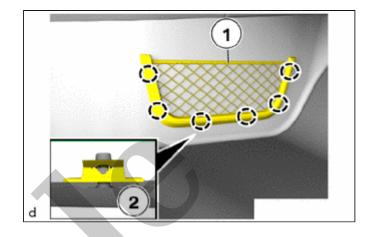



(a) Detach the clips (2) to remove the footwell storage net (1).

26. REMOVE FLOOR MAT ASSEMBLY

HINT:

- Perform this procedure only when replacement of the floor mat assembly is necessary.
- Use the same procedures for the front passenger side.



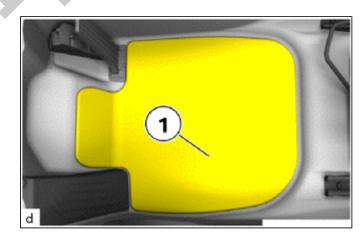

(b) Turn the No. 1 mat set plates (1) by 90° and remove upward from the front floor carpet assembly.

HINT:

Perform this procedure only when replacement of the No. 1 mat set plate is necessary.