


Your Ultimate Source for OEM Repair Manuals

FactoryManuals.net is a great resource for anyone who wants to save money on repairs by doing their own work. The manuals provide detailed instructions and diagrams that make it easy to understand how to fix a vehicle.

2024 Volvo V60 Service and Repair Manual

[Go to manual page](#)

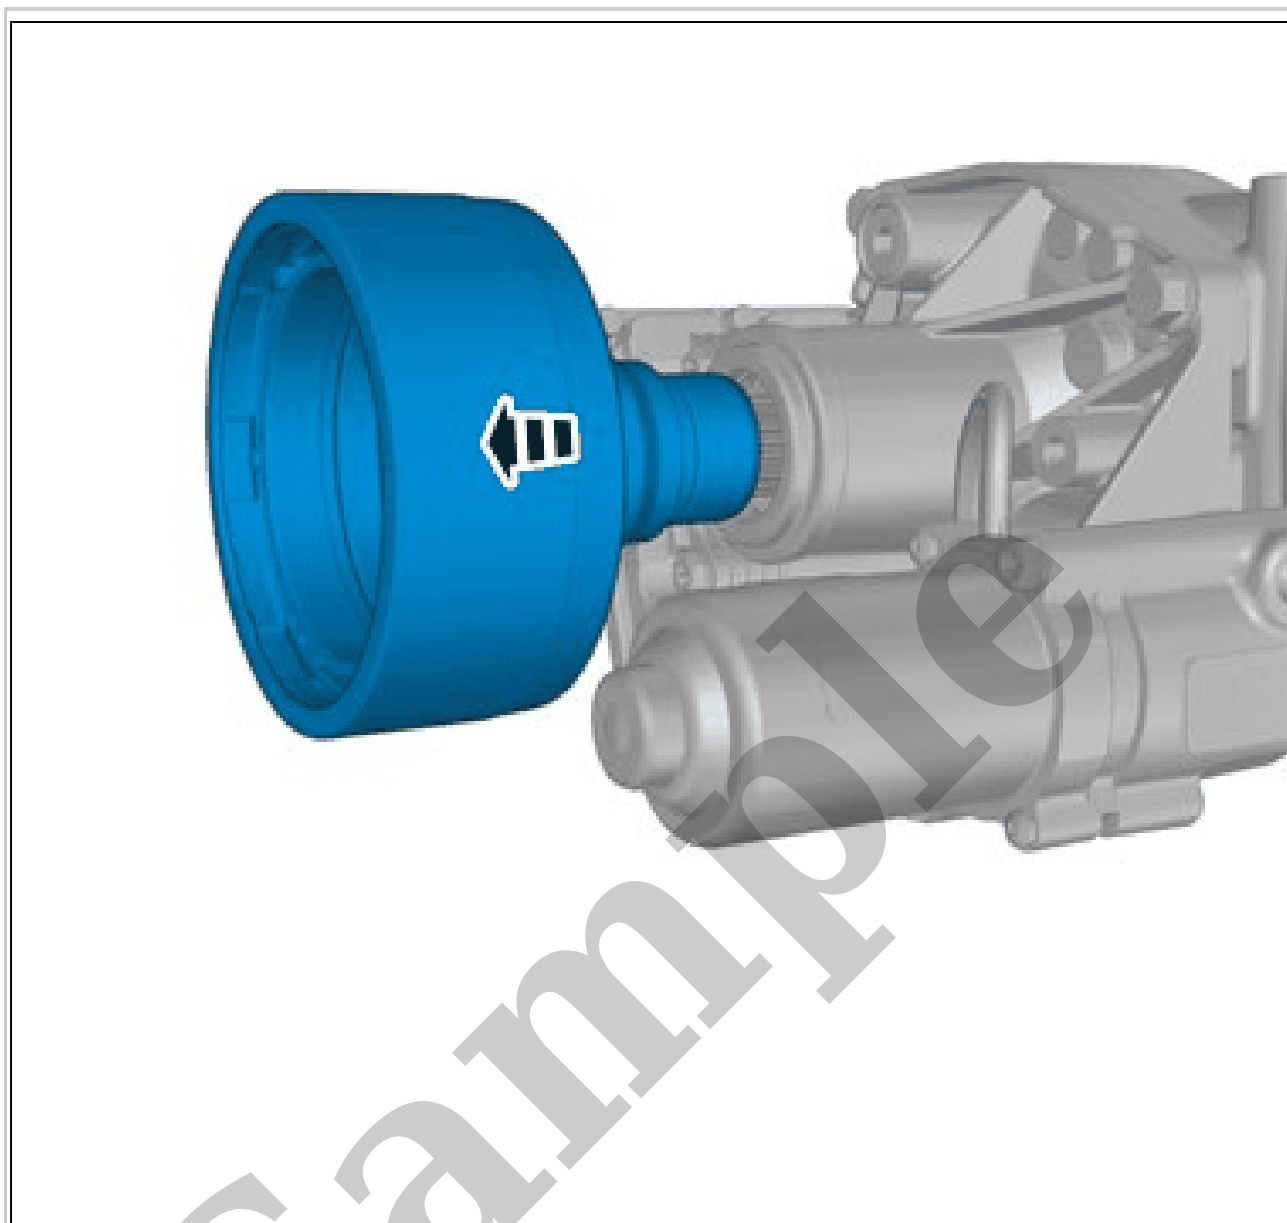

Courtesy of VOLVO CARS CORPORATION


Remove the marked part.

DRIVE FLANGE FINAL DRIVE > DRIVE FLANGE FINAL DRIVE [2018-2022, TG-81SC AWD] > INSTALLATION

To install, reverse the removal procedure.


Perform Active On Demand Coupling fluid level, check. Refer to: ACTIVE ON DEMAND COUPLING FLUID LEVEL CHECK

ELECTRIC FRONT AXLE DRIVE EFAD > ELECTRIC FRONT AXLE DRIVE EFAD [2021-2022, E400V6, 1EDT AWD] > REMOVAL AND INSTALLATION

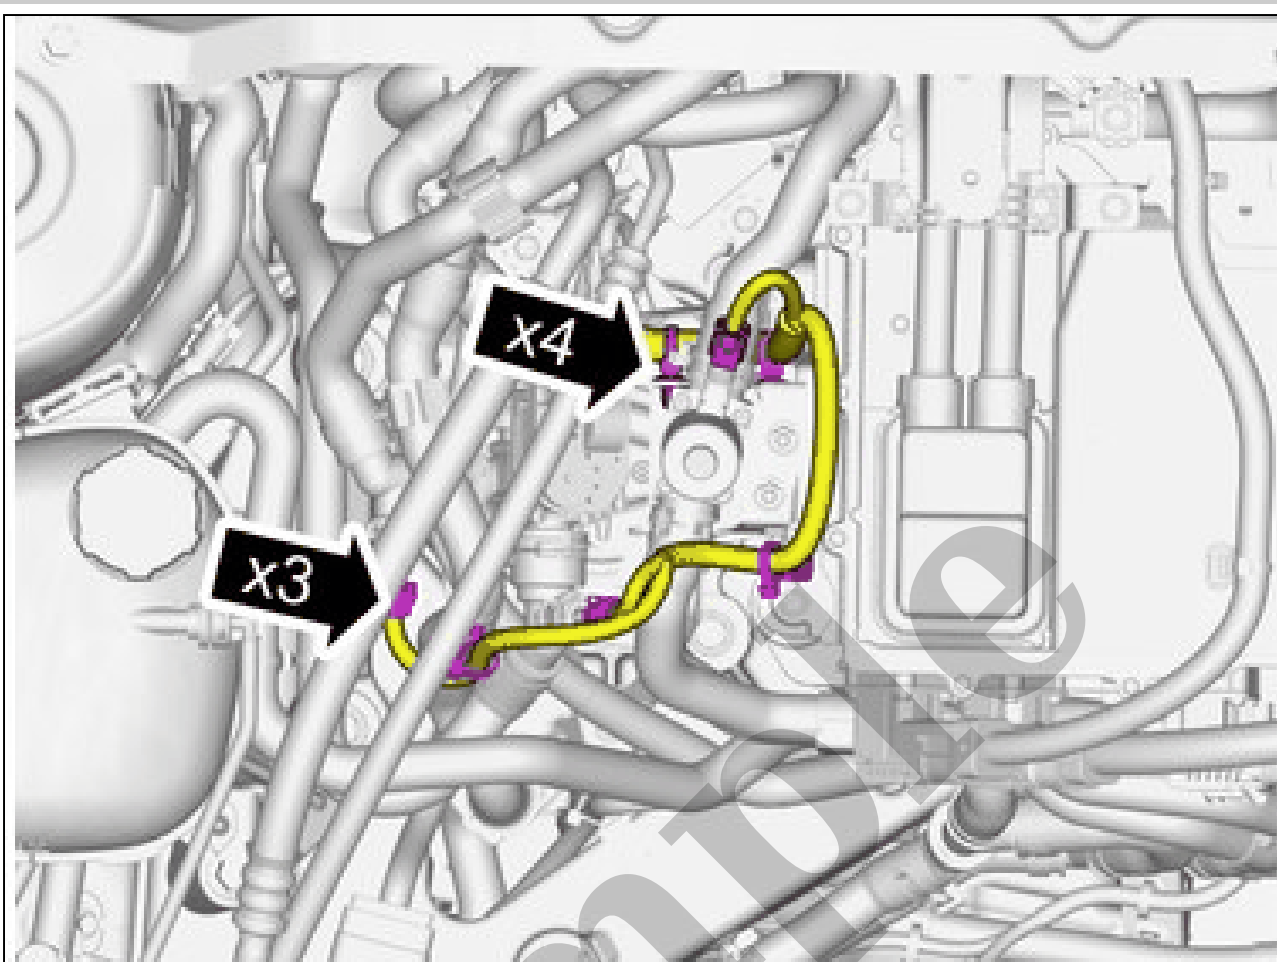

Courtesy of VOLVO CARS CORPORATION


Remove the cable harness clips.
Disconnect the connectors.
Fold marked part aside.

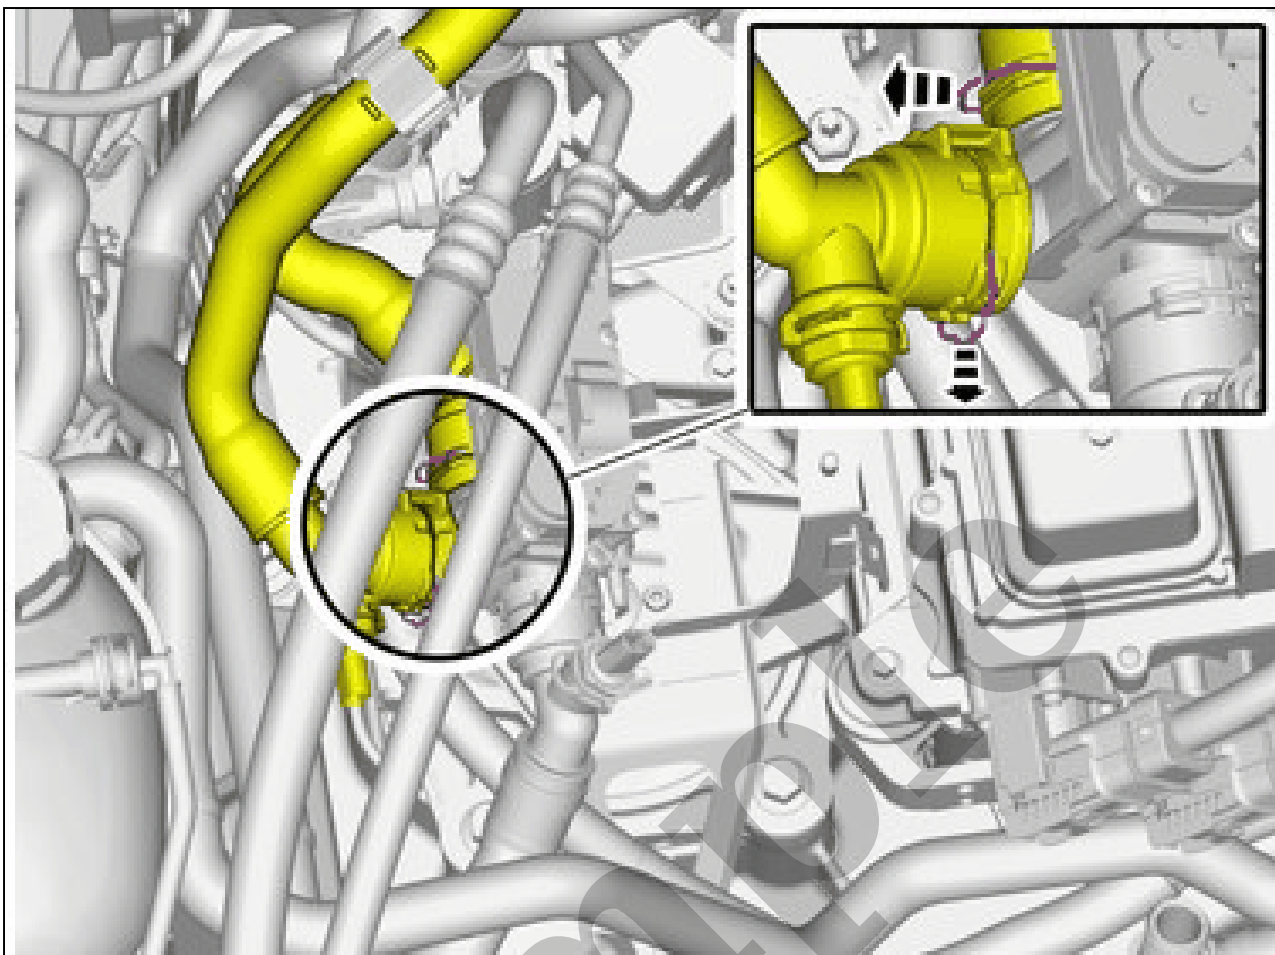

Courtesy of VOLVO CARS CORPORATION

WARNING: *Be prepared to collect escaping fluid.*

Release the locks.
Undo the hoses from the connections.
Fold marked part aside.

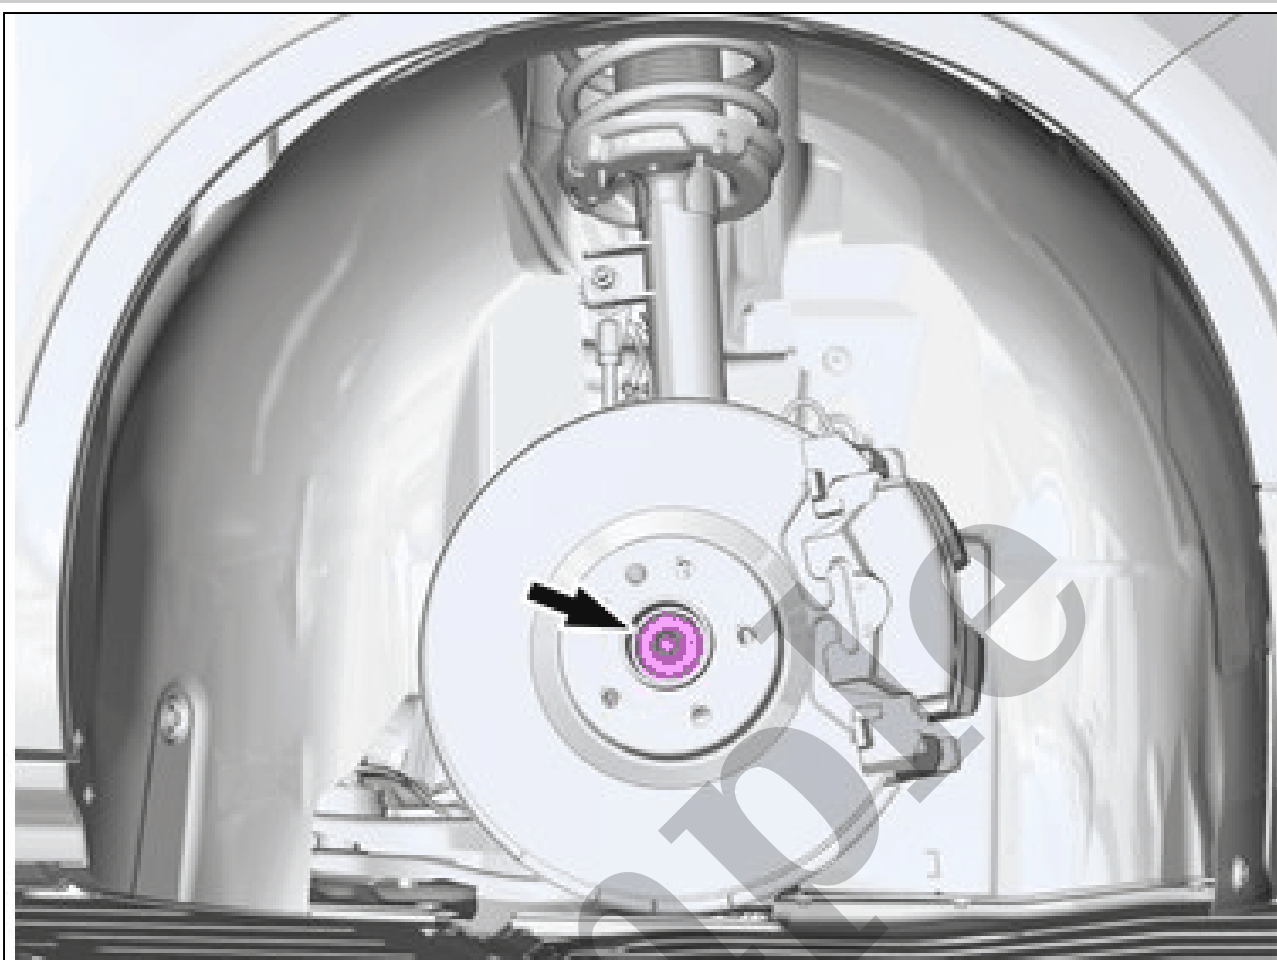


Courtesy of VOLVO CARS CORPORATION

Remove the screw.

Torque: Driveshaft to wheel hub (front)

- Stage 1: 45Nm
- Stage 2: 90°

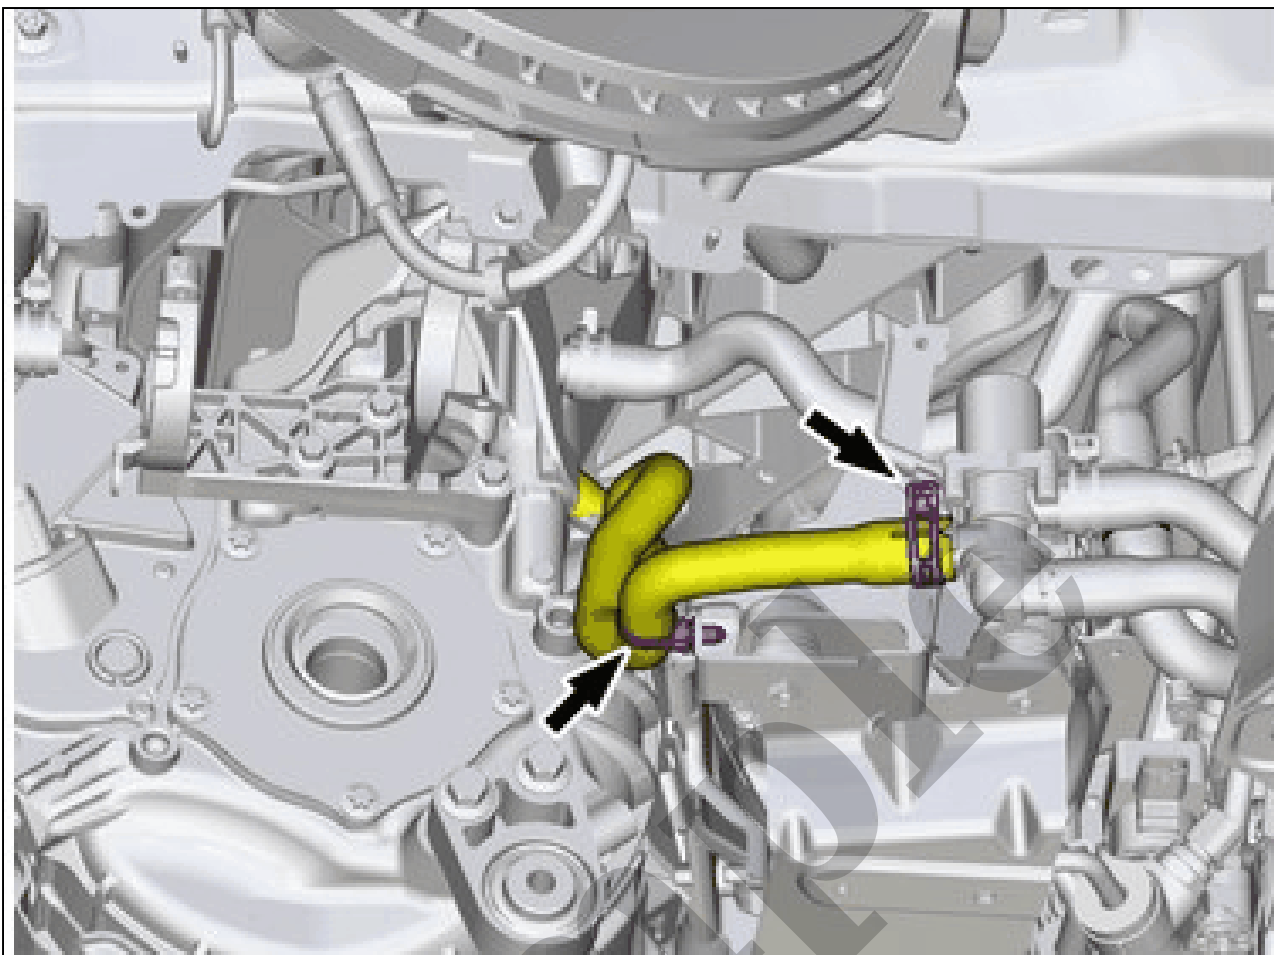

Courtesy of VOLVO CARS CORPORATION


WARNING: *Be prepared to collect escaping fluid.*

Loosen the clip.

Loosen the hose clamp.


Undo the hose from the connection.

APPLIES TO THE LEFT-HAND SIDE:

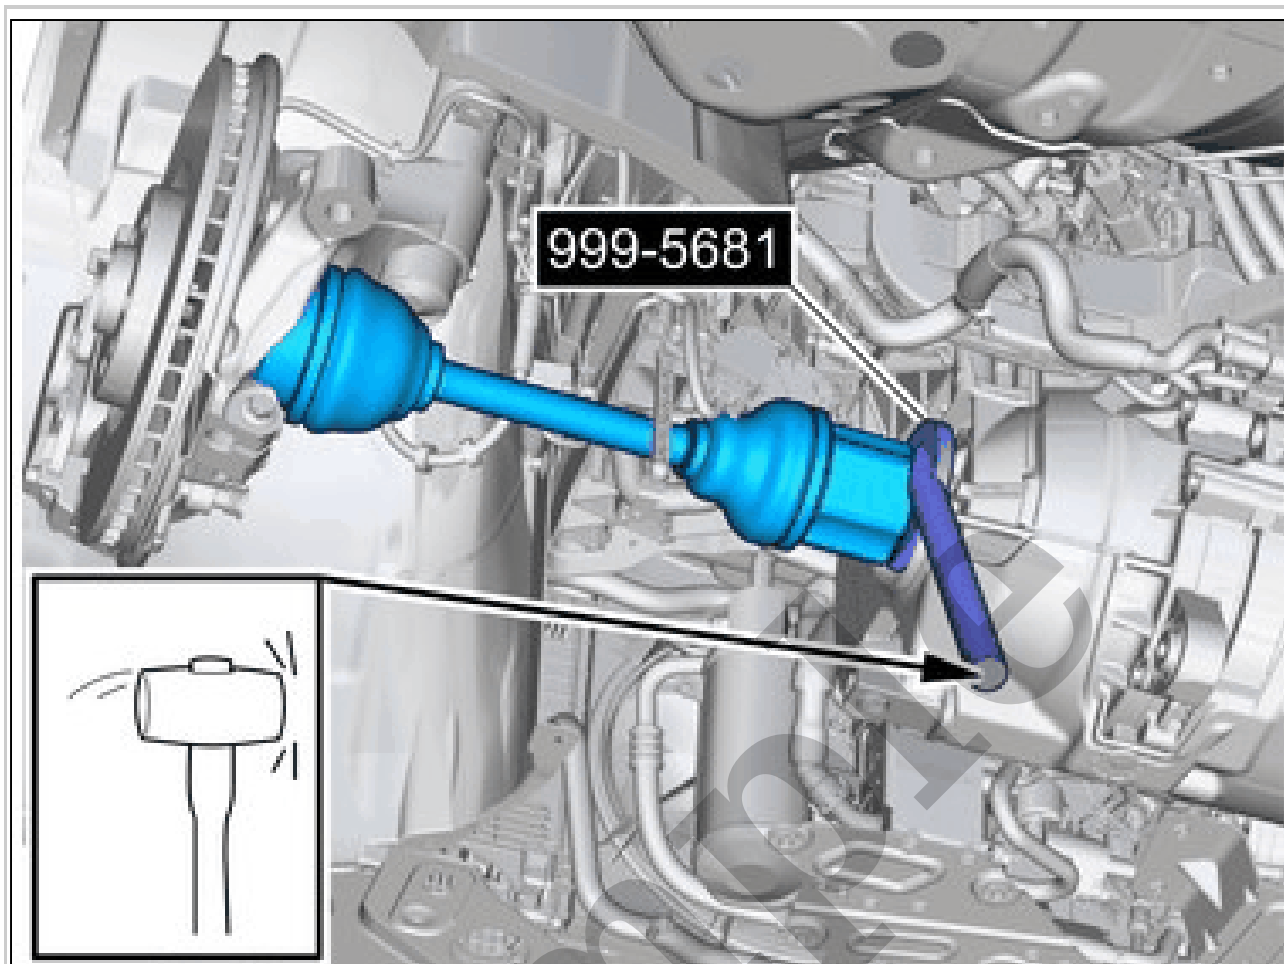

Courtesy of VOLVO CARS CORPORATION

Loosen the marked detail.
Special Tool: 999 5681 Jimmy bar
Use: Copper mallet

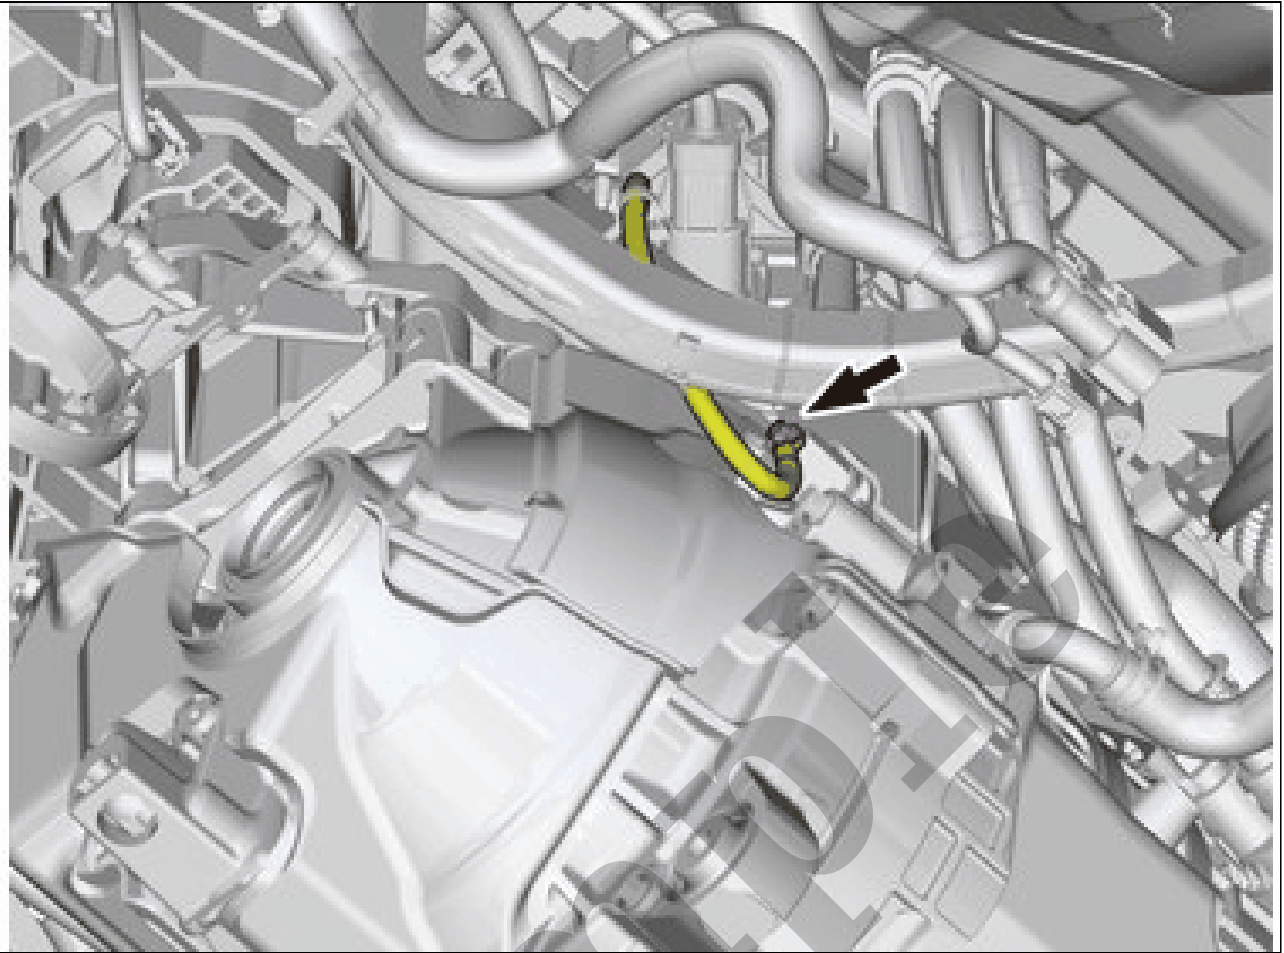


Courtesy of VOLVO CARS CORPORATION

Remove the screw.

Fold marked part aside.

Torque: M6, 10Nm

CONTINUE THE REMOVAL FOLLOWING THE STEPS BELOW.

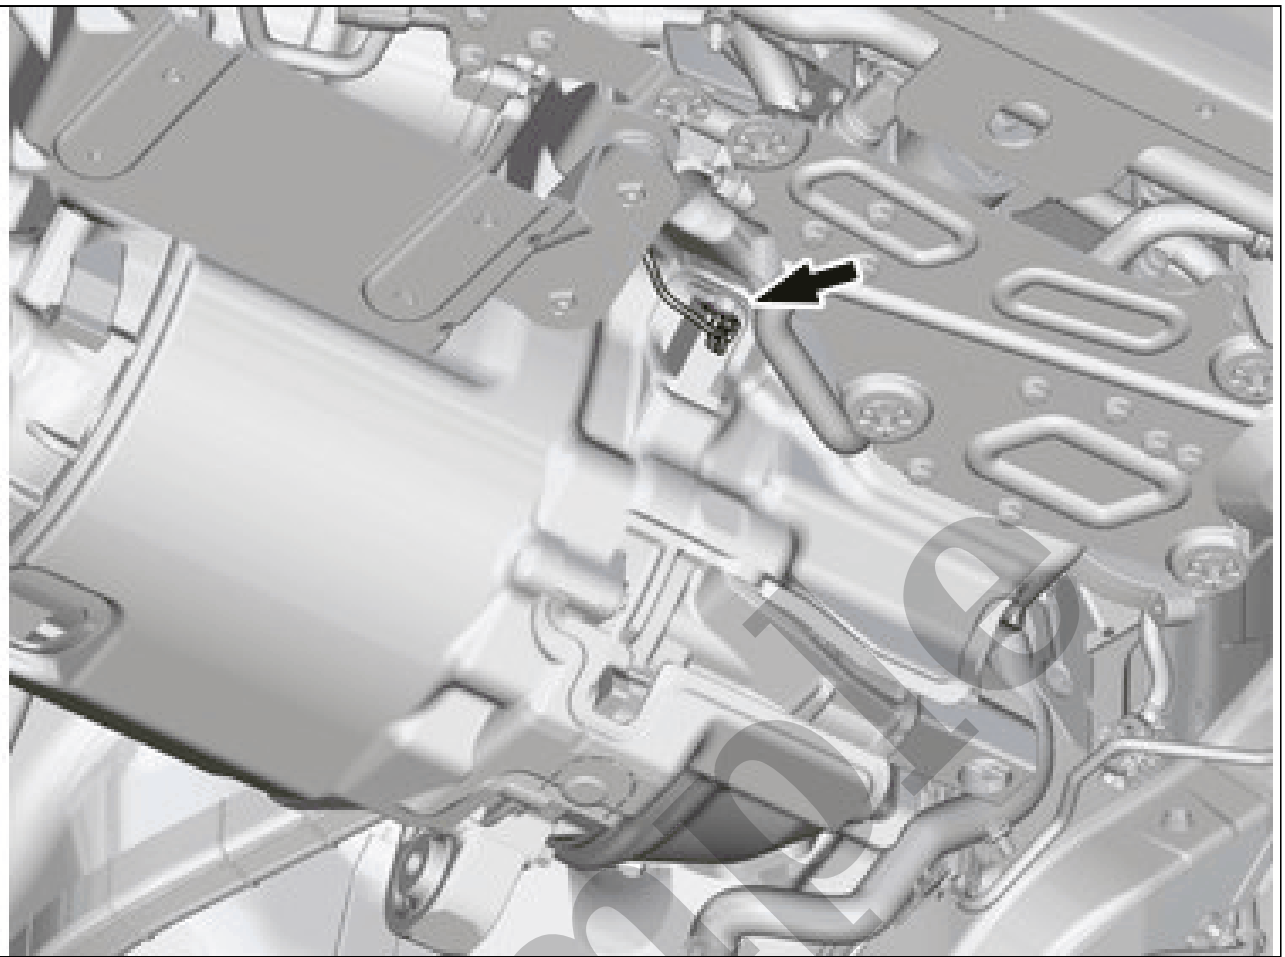

Courtesy of VOLVO CARS CORPORATION

Remove the screw.
Fold marked part aside.
Torque: M8, 24Nm